BBC MICRO-MASTER-ELECTRON-ATOM

£1-30

PROPERTY OF THE PROPERT

APRIL 1987

ON THE SIDE:

Print extra-wide spreadsheets

CLEAR AS MUD:

Adventures over the phone

RAM TESTER:

Check out your sideways board

IN BUSINESS:


Our readers and their micros

COMPACT SPRITES:

Built-in software moves graphics

ELECTRON BOOSTER:

Slogger board adds BBC power

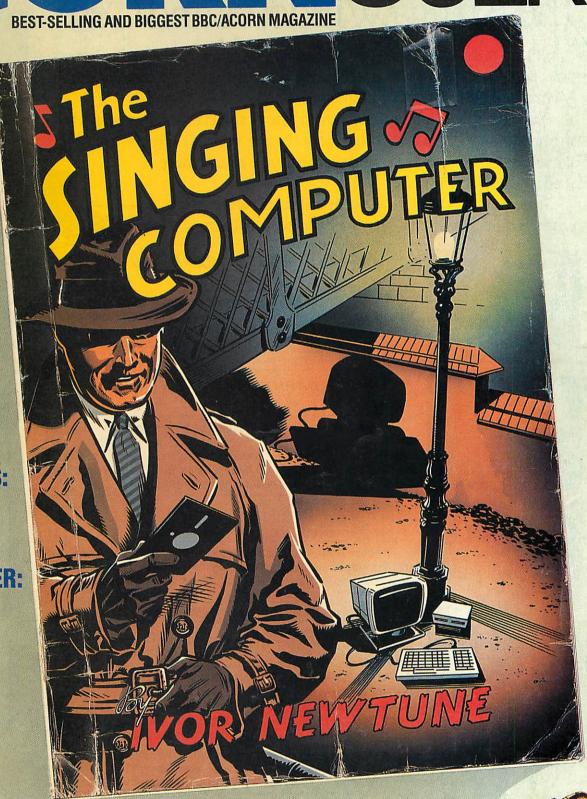

MUSIC SPECIAL

Play away with our great triple feature

With the AMX range of Software, you can now forget about the Mac, the St., the Amiga, Windows and Gem.

It's no surprise that nearly all new 16 bit 'state of the art' micros now come with a Mouse and Wimp environment (Windows, Icons, Menus and Pointers) as standard.

With the BBC you already own one of the classic micros and by simply adding the AMX range of software you can achieve the same ease of use, freedom and versatility of much more sophisticated computers.

The AMX Mouse and compatible software — it's what you and your BBC micro have been missing.





ART AND MOUSE OPERATING SYSTEM

AMX MOUSE PACKAGE 16K Rom and Disc

£79.95

There's not much joy in a joystick and keyboards can be all fingers and thumbs. Acclaimed by the press as 'the best input device', already over 30,000 BBC users have adopted an AMX Mouse. Available for the BBC, B \pm , Master 128 and Master Compact. Please state version when ordering.

AMX SUPERART AND MOS (only)

£49.95.





GRAPHIC DFS FRONT END

MAX 16K Rom

£19.95

MAX provides an easy to use graphic based front end to your computer's disc filing system including a comprehensive set of disc management operations such as cataloging, copying, deleting and re-naming, you can also run programs from within MAX. Available for the BBC, B+, Master 128 and Master Compact. Please state version when ordering.





DESKTOP PUBLISHING

AMX PAGEMAKER 2 x 16K Rom. 2 x Disc

£49.95

Produce professional documents and newspapers with text and graphics, supplied with 16 variable typefaces it has many graphic functions including cut, copy, paste, etc. Available for BBC, B+, Master 128 and Master Compact.

EXTRA! EXTRA! 2 x FLIPPY DISC

£24.95

300k fantastic clip art, over 25 fonts, and utility software.





COMPUTER AIDED DESIGN

AMX DESIGN 32K Rom and Disc

£69.95

A highly sophisticated CAD package allowing drawings such as a PCB design up to the most intricate architectural drawing.

Advanced features include full zoom and macro facilities, 58×58 screen canvas, fully supported printer and plotter output. (Launch date Feb. 1987). Available for the BBC, B+, Master 128 and Master Compact.



There is also a growing list of additional AMX software requiring the original AMX Art Rom or Super Art Rom including:

AMX 3D Zicon £24.95, AMX Database £24.95, AMX XAM £24.95 AMX Mind Games £14.95, *AMX Utilities £14.95, *AMX paint Pot £14.95.

*These programs are only suitable for use with the original AMX Art/Rom which can be purchased with a mouse for £69.95

A Mouse (only) can be purchased for £34.95 direct from AMS, using the order form enclosed in each of the four major software packages (see screen shots). These superb products are available from all good computer dealers or direct by cheque, access or visa. All prices include VAT and post and packaging.





PROGRAMS WORK WITH JOYSTICK KEYBOARD OR

IMAGINATION AT YOUR FINGERTIPS.

ADVANCED MEMORY SYSTEMS LTD. 166/170 WILDERSPOOL CAUSEWAY, WARRINGTON, WA4 6QA. TELEX 628672 AMSG. FAX 0925 58039.

TUBELINK ON PRESTEL PAGE 2582182 SUPPORTS THE AMX MOUSE AND ALL AMS SOFTWARE.

MICRO MEDIA Computer Supplies

0707 52698 or 0707 50913

Dept. AU Rydal Mount, Baker Street, Potters Bar, Herts EN6 2BP

Printer Ribbons

Mixed types for quantity breaks 2+ 5+ 12+ 2.70 2.30 2.10 2.70 2.30 2.10 12+ Acom AP80 AP 100 Ink Jet Cartridge 7.50 per pack of four Brother M1009 3.50 3.00 2.80 Red Brown Blue Green 4.95 4.65 4.25 3.30 2.90 3.40 3.00 HR 15 MS 2.60 2.70 2.50 HR 15 Fabric Canon PW1156/1080 3.20 2.70 Red Brown Blue Green 4.70 4.20 3.90 3.50 3.00 Centronics GLP Red Brown Blue Green 4.95 4.65 4.25 Dalsystep 2000 M/S 2.90 2.40 2.20 3.50

4.10 3.80 Fabric Epson FX/MX/RX 80 2.20 2.80 2.40 3.30 Red Brown Blue Green 4.00 3.10 2.40 2.80 1X80 Red Brown Blue Green 4.00 3.30 3.10 **Juki** 5510 2.80 2.40 Red Brown Blue Green 4.00 3.30 2.20 3.10 1.90 2.30 1.70 6100 MS 1.40 1.10 1.00 6100SS

3.60 3.30 3.10 2200 Fabric 2200 SS 3.00 2.60 2.40 3.90 3.50 3.30 2200 Cor Kaga KP810/910 3.20 2.70 2.50 Red Brown Blue Green 4.70 4.20 3.90 M/Tally MT 80 M/S 3.80 3.00 2.80 3.00 NECPC 8023 3.60

Red Brown Blue Green 2.40 2.00 1.80 3.90 3.40 2.90 Panasonic KXP 110 2.40 Quendata 2000 MS 2.90 2.20 4.10 3.80 3.50 Fabric Selkosha GP80 2.30 2.10 2.70

1.50 1.20 1.10

4.00

GP100/250 2.70 2.30 2.10 GP500 3.70 3.10 2.90 Red Broiwn Blue Green 4.90 4.60 4.20 **Shinwa** CP80 M/S 3.80 3.00 2.80

 Shinwa CP80 M/S
 3.80
 3.00

 Smith Corona
 0100/200
 4.90
 4.50

 Change (2000) M/S
 3.80
 3.00

Oki 80/82

EL1000/2000 M/S 8.30 7.70 7.00 Fabric 3.70 3.40 3.30 Corr 4.80 4.50 4.30 Star Gemini 10x15x 1.50 1.20 1.10

Red Brown Blue Green 2.40 2.00 1.80 NL 10 5.50 4.80 4.50 Watters WM80 M/S 3.80 3.00 2.80 2000 3.70 3.30 2.90

If the ribbon you require is not listed ring 0707 52698 and let us quote

Head Cleaners

Discs with 15ml cleaning solution 51/4" Head Cleaner 4.00 31/2" Head Cleaner 5.00

Printer Leads

Centronics lead to connect BBC to Epson Kaga Canon etc.

1 MTR 6.30 2 MTR 8.50

Printout Binders

Adjustable hardback ring binder for 11x9½ to 12x9½ cont paper 40mm paper capacity

BLUE RED or BLACK £4.90 each set of 5 indexes £2.30

Disc Mailers

Price each 50+100+ Rigid Cardboard holds 40p 28p up to 3 discs

Swivel Bases

for Monitors



Pan tilt revolves around 360° 12.5° tiltable up and down adjustable by front mechanism.

> 12" Monitors £12.00 14" Monitors £15.00





Printer Stands



80 column printers £19.90 132 column printers £24.90

Orders despatched, 24 hrs.

delivery. For next day delivery

ring for details

Please allow 5 days for

Postage covers UK only

Micro Media Brand Universal 51/4" Discs

Reversible with 2 notches and index holes. Lifetime guarantee, hub rings, envelopes, labels. Suitable for 40 or 80 track. Packed in plastic library case.

10+ 30+ 50+ **9.40 8.90 8.50**

Unbranded 51/4" Discs

Certified lifetime warranty hub rings, envelopes, labels

	10+	30+	50+
SS/DD 40	6.50	6.00	5.50
DS/DD 40	7.50	7.00	6.50
DS/DD 80	8.50	8.00	7.50

Unbranded 31/2" Discs

Lifetime Guarantee/label sets SS/DD 17.00 16.00 15.00 DS/DD 19.00 18.00 17.00

3M 51/4" Lifetime Guarantee SS/DD 40 10.30 9.90 9.60 DS/DD 40 12.50 12.20 11.90 DS/DD 80 15.20 15.20 14.90

3M 3½" Lifetime Guarantee ss/DD 20.50 20.30 20.00 DS/DD 25.50 25.30 25.00

 Verbatim
 Datalife
 5¼"

 SS/DD 40
 11.70
 11.40
 11.10

 DS/DD 40
 14.70
 14.40
 14.10

 DS/DD 80
 19.70
 19.40
 19.10

Computer Labels

Comparer	MDCIS	Marine Street	
Continuous fanfold	d, sprocke	et fed	
Price per 1000	1,000	2,000	
70 x 36	4.20	3.80	
89 x 36	4.30	3.90	
89 x 49	5.90	5.30	
102 x 36	4.50	4.20	
Please state no. of labels across the			
sheet (1, 2 or 3).			

9½" Backing Sheet for Fixed Tractor

INCO IIGO	VI.	
	1,000	2,000
70 x 36 3 across	4.20	3.80
89 x 362 across	6.60	6.30
102 x 36 2 across	670	640

Computer paper

Plain fanfold, micro perf edges Size Weight 1000's Price per box perbox 1 box 2 bxs+2 14.40 13.60 asm 14.40 13.60 11x91/2 60 80 17.80 16.30 FXACT A4 113/3×91/4 70 24.00 21.30 15.20 12.70 90 A4 Fixed tractor paper available





Disc Boxes

	1	3+
MM 100 51/4 x100	11.70	10.00
MD 100 51/4 x100	11.70	10.00
MM 50 51/4 x50	8.70	7.90
MD 50 51/4 x50	8.70	7.90
MM 40 31/2 x40	8.50	7.40
Rexel Mini Disc Box	5.00	
Plastic Library Case	3 for 4	1.00

All MM/MD boxes anti-static with lock

● Educational and HMG orders accepted. ● Trade enquires. ● Personal callers welcome. ● Open Sat 10am - 4pm

ALL PRICES INCLUSIVE OF POSTAGE & PACKING

Please add VAT at 15%



24-Hour Credit Card Orders

0707 52698

-91520 92019-91520 92019-91520 92019-91520 92019-

ORNUS ISSUE No 57 APRIL 1987

EDITOR Tony Quinn

DEPUTY EDITOR Steve Mansfield

TECHNICAL EDITOR Graham Bell

SUB-EDITORS Shona McIsaac Paul Horrell

EDITORIAL SECRETARY Colette Curley

ART DIRECTOR Mike Lackersteen

ART EDITOR Liz Thompson

ASSISTANT ART EDITOR Paul Holmes

EDITORIAL MANAGER Ellen Brush

PRODUCTION ASSISTANT Teri North

GROUP ADVERTISEMENT DIRECTOR Stefanie Blower

ADVERTISEMENT MANAGER Simon Goode

SALES EXECUTIVE Thomas Rashid

ADVERTISEMENT PRODUCTION Jonathan Marsh


MERCHANDISING MANAGER Sarah Bullard

PUBLISHING DIRECTOR Michael Potter

EDITORIAL DIRECTOR Christopher Ward

NEW USERS			Year.		
HINTS AND TIPS: Martin Phillips on the v	exed	question of indirection o	perato	rs	41
FIRST BYTE:		AM in the various micro			49
REVIEWS		A STATE OF THE STATE OF			
GAMES: The Last of the Free, Q	uest f	or Freedom, Goal and V	indaloc		139
GAMES: The Games Page with the	new re	eleases, high scores and c	lavar d	odges	141
HARDWARE:		se as well as synthesise sp		ouges	143
GAMES: Two educational advent	ura n	rojects			145
HARDWARE:		boosts the Electron, but	not als	Wave	146
GAMES:			not ar	ways	148
The two multi user adve SOFTWARE: Easy disc and ROM ore		s: all trolls together tion with <i>Menu Master</i> :	cheap l	out useful	151
BUSINESS			r		
SURVEY:			4		153
	e rang	ge of business uses for a I	BBC m	icro	
SOFTWARE: A package to enhance gr	reatly	the management of smal	l hotel:	S	155
EDUCATION		STATE POPULATION			
NEWS: The latest for Acorns in	schoo	ols and colleges		A RECORDS	163
ART SOFTWARE: Chris Drage and Nick E	lvans	on picture processing			165
REGULARS					
News	7	Sideways RAM offers	92	Utilities/Help discs	132
Letters	35	Competition	109	Favourite tape/disc	134
Subscription offer – 1	48	Yellow Pages	113	Order forms	135
Subscription offer – 2	52	ROM offers	130	Free ads	183
Acorn Forum	53	Monthly tape/disc	131	Acorn Abuser's Diary	194








FEATURES

DIGITAL DUET/Page 81

Guest editor David Acton on Autumn, a new standard for transferring music between BBC micros

TUNES TWO/Page 86



Tunemaker was one of our most popular programs ever. David Lawrence has designed an improved version

AMPLY ALONG/Page 90



Another first: Bob Cornford-Wood presents his own composition in the Ample language of Music 500 and 5000

AS LONG AS YOU LIKE/Page 96

BURNEMI.	
loan	Payme
printin	
s tary	·····································
t surer	expen
room	hire
total	payme
RECEIPT	
sale of	T ss In Si.
sale of	books

If your spreadsheets are too wide for your printer, try John Knight's novel means of printing them sideways

SPRIGHTLY SPRITELY/Page 104



The series on the Compact by David Atherton continues with sprite design using the pointer software

NEXT MONTH

COVER

MUSIC SPECIAL

Illustration by
Mark Thomas
with apologies to
The Singing Detective

Education special issue: robots, Lego, history, software list and networks.

Plus calligraphy, compatibility and more Mandelbrots

© Redwood Publishing Ltd 1987. All rights reserved. No part of this publication may be reproduced without prior written permission of the publisher. The publisher cannot accept any responsibility for claims or errors in articles, programs or advertisements published. The opinions expressed are those of the authors and do not necessarily represent those of the publisher, Acorn Computers Ltd or Acornsoft Ltd. Acorn, Acornsoft and the acorn symbol are the registered trademarks of Acorn Computers Ltd and Acornsoft Ltd. Acorn User welcomes contributions from readers – please supply a suitable sae if you want your submission to be returned. ISSN 0263 7456.

ACORN USER APRIL 1987

MASTER 128

Complete With Internal Software Master Turbo Upgrade Master Econet Module Master ET Master 512 £420.00 £113.95 £46.00 £373.75 £217.35

Master ET £273.75
Master 512 upgrade board incorporates the Intel 80186 processor, plus 512K bytes of RAM. Digital Research DOS+, which is copatible with both MS/DOS version 2, and CP/M 86, allows you to run a large proportion of the most useful programs available. A dual 80 track disc drive is required to run programs on the 512. Provided free with 512 upgrade board are three GEM packages, GEM Desk Top, GEM write, GEM Paint.
Eprom Cartridge £14.95
Reference Manual Part | £14.95
Reference Manual Part 2
Z80 Second Processor Acorn Teletext Receiver Winchester Disk Drive 10 MBYTES £125.00
Winchester Disk Drive \$125.00
FCONETT ACCESSORIES

ECONET ACCESSORIES

CONET ACCESS
100m Cable
Station Lead Set
Econet Starter Kit
Econet Bridge
Level I Fileserver 40 Track
Level 2 Filesaver 80 Track £89.00 £29.00 £99.00 £199.00 £99.00 £235.00 Print Server Eprom

64K Upgrade Kit	£39.95
17/70 Upgrade Kit	£49.94
ADFS ROM	£29.95
Disc Upgrade Kit	£65.00
Econet Upgrade Kit	£49.00
Speech Upgrade Kit	£49.00
DNFS ROM	£20.00

WORD PROCESSING SPECIAL PACKAGE

Based on Master 128. The Twillstar All in One Word Processing Package contains a Master 128. View 3.0, Viewsheet, High Res Green Monitor, 800K Dual Drives with PSU, Quendata Daisy Wheel Printer together with a box of Discs, Paper, and all the Cables. F899.00 and all the Cables. £899.00

PACKAGE 2

PACKAGE 2
Based on Master Compact 128. The
Twillstar package includes Compact
128, latest version of the View Word
processor, single 640K disk drive,
monochrome monitor,
correspondence quality printer. All
connecting cables for above and
also 5 disks and some paper.
£635.00



BBC **MASTER** COMPACT

Twillstar continues to offer the MASTER COMPACT for your Home Education and Business needs! Complete with bundled software and an integral 3.5" Disk Drive in the following Systems:-

Tollowing Systems:-SYSTEM 1 (inc.

and an integral 3.5" Disk Drive in the following Systems:

SYSTEM 1 (inc. VAT) £414.00

128K *Single 640K Drive* *UHF Modulator* *Bundled Software*
SYSTEM 2 (inc. VAT) £488.75
As System 1. With *12" High Res. Monochrome Monitor*
SYSTEM 3 (inc. VAT) £626.75
As System 1. With *14" Medium Res. RGB Monitor*
SPECIFICATIONS: * Compatible with Master Series micro subset * 128K RAM inc 64K sideways RAM * 64K ROM inc 32K MOS, 16K BASIC * Up to 4 internal ROM sockets * 3.5" 640K formatted disk drive * (optional) Econet * Serial * 5V opwer from disk drive module * Usual 8 BBC disply modes inc. Mode 7 * BUNDLED SOFTWARE: Pull down menus * Desk top inc. note pad, calculator * VIEW 3.0 * CARD INDEX * Full LOGO * BBC BASIC 4.0 * ADFS + Utils * Welcome suite * Tutorials * (1770 DFS under licence)
2nd DRIVE KIT £113.00

2nd DRIVE KIT

MONOCHROME MONITORS

Hantarex H x 12 Dark Gloss Screen

COLOUR MONITORS

Microvitec 1431 Std Res Microvitec 1451 Med Res Microvitec 1441 Hi Res

Microvitec 2030 Cs 20 Microvitec 2030 Cs Std Res Microvitec 1431 AP Std Res Microvitec 1451 Ap Med Res

high resolution monochrome monitor 12" Composite Video &

£79.00

£95.00

£120.00

£120.00

£75.00

£201.25 £270.25 £391.00

£425.50

£224.25

£293.25

Phillips BM 7502 Green Screen

Phillips BM 7522 Amber Screen Kaga KX 1202G Hi Res Green Kaga KX 1203G Ultra Hi Res Amber



Taxan Super Vision 620

Audio Input.


Phillips CM 8533 Med Res monitor with dark glass etched screen composite video input RGB and

£289.00



High Resolution colour monitor

High Resolution colour monitor with several unique features, at an affordable price.
SUPERVISION 620
12" RGB High resolution colour monitor. Fully compatable with IBM, Apple, BBC and most other Personal Computers. 635 x 312 line resolution. Positive or negative sync input. Text colour switchable to green, amber, white or blue or inverse white. Super high contrast tube. Optional tilt-swivel base (with clock/calendar available). Special introductory offer. £299.00



PHILIPS MONITOR TO TV CONVERTER £69.00

HOW TO TURN A DEDICATED MONITOR INTO A FIRST CLASS TV SET? SIMPLY SLIDE THE SWITCH ON

THE TV TUNER. The Philips AV 7300 TV tuner

turns any colour monitor (with CVBS and audio inputs) into a extra versatility and value from your monitor. A convenient TV/computer switch allows the tuner to stay permanently connected to the computer and at the same time to a TV antenna.

OUTSTANDING PERFORMANCE

OUTSTANDING VALUE
Just released by Hantarex 14"
Colour Monitor Standard Resolution RGB PAL Audio Input (Inc. VAT) £175.00

SPECIAL OFFER

Mitsubushi 1404 Medium Resolution Monitor with 640 X 200 Pixels RGB available with IBM or



SWIVEL BASE

Tilt and swivel base for 12" or 14" monitor or TV. "Looks very elegant" £17.25

MITSUBISHI DISC DRIVES

User Friendly Disk Drives 100% BBC compatible slimiline disc drives. All drives are supplied complete with formatting diskette, comprehensive users manual and all necessary cables. All drives are 40/80 Track switchable at the front and have two years warranty. years warranty.

514" Drives without P.S.U. MD 400A Single 400K Double Sided £118.00 £118.00 MD 802C Dual 400K

Double Sided £219.00 51/4" Drives with P.S.U.

MD 400B Single 400K Double Sided MD 802E Dual 400K Double Sided £135.00 £249.00

DOUBLE SIGNAL

MD 802D Dual 400K Drives
horizontally mounted in a monitor
stand to fit both the BBC B and the
Master series. £269.00





Now available Taxan Multipurpose Type Pril Buffer KIF-4308 compatible with any Centronics interface

GENERAL COMPUTER **ACCESSORIES**

MODEMS **FPROMS** Components and spare parts Joysticks Disk storage boxes **Dust covers**

and lots more The latest range of Software Education

Games All in stock, Call for details

FAST REPAIR SERVICE

In house service department Repairs for computer printers and disk drives. Call 01-574 5271 and ask for our engineering

depatment.

visit our **NEW SHOWROOM** Open 9am-6pm Mon-Sat **OPEN SUNDAYS 10-2**

YOUR ONE STOP MEGA-COMPUSTORE FOR HOME, EDUCATION & BUSINESS NEEDS!

KX-P 1080 DOT MATRIX PRINTER

* NEAR-LETTER QUALITY PRINTING IN ALL PITCHES * OPERATOR ACCESSIBLE PRINT MODE SELECTOR (Std./Pgm.,NLQ,

Comp.)
• FRICTION FEED AND
ADJUSTABLE TRACTOR ARE

*WORD PROCESSING FUNCTIONS
(Justification, Centering, L&R

(JUSTICIALIS)


PROPORTIONAL SPACE PRINTING

HIGH RESOLUTION, DOTADDRESSABLE GRAPHICS

UP TO 40 DOWNLOADABLE

* COMMAND CODE COMPATIBLE
WITH POPULAR PRINTER

SOFTWARE * PRINT SPEED, DRAFT: 100 NLQ: 20 COMPRESSED: 86 9 PIN PRINT HEAD



The Panasonic KX-P 1080 impact dot matrix printer is ideal for applications that require economical high quality printing. It offers a variety of print modes, all producing crisp clearly formed characters. Wide choice of print sizes includes semi-compressed and commpressed (even in near-letter quality printing). Operator accessible print mode selector adds convenience. For a reliable printer at an affordable reliable printer at an affordable price, the KX-P 1080 is always a £159.00

Juki 5510

Juki 5510

- Gives you 180 CPS & NLO Standards
...and thats not all! The Juki 5510 also has full graphics mode, two position 'dip-switch' (providing instant compatibility with both the Epson and the IBM Graphic Printer). Standard 2K memory (expandable to 14K) builth-Parallel Centronics interface and 8-switch international character sets. If you need colour too, the optional Juki you need colour too, the optional Juki 5510 Colour Kit gives you seven colours. £112.00

EPSON PRINTERS

EPSON PHINTERS
Epson FX 800 and FX 1000 range offers superior printing and technical features. 200 cps in draft and 40 cps in NLO. Complete with tractor and friction feed as standard. Offering IBM compatibility, full graphics. Also includes two NLO fonts, 101,217 and 20 cpi, double height and double width with 8K buffer built in. £369.00

FX 1000 FX 800 Sheetfeeder FX 1000 Sheetfeeder £499.00

Epson EX 800/1000 High speed printers.
300 cps in 12 cpi mode. Also offers four colour printing.
EX 800 £465.00
EX 1000 £545.00 £465.00 Colour option for both



CANON 55A

Wide version. Fully IBM compatible.


£399.00

CANON PW1080A

80 column printer with 160 cps draft and 40 cps NLQ with built in friction and tractor feed. Fully compatible with Epson FX80. Standard parallel interface. £249.00

STAR NB15


Outstanding print quality at 300 cps in draft mode and immaculate 24 pin Letter Quality at 100 cps. Fully featured front control panel. Centronics parallel or RS22 serial interface £856.75



STAR NL-10
Fine Near-Letter-Quality, 100%
compatibility and total
reliability all in one easy to use compatibility all in one easy to use printer. For quality, ease of operation and dependability, nothing beats the Star NL-10. You get outstanding print quality at 120 cps in draft mode and 30 cps in near letter quality. Plus, the sleek NL-10 offers full compatibility with most popular computers through plug in interface cartridges. Just insert the appropriate plug in interface cartridge for your IBM-PC. Commodore, Apple IIc or other parallel computer and your Star NL-10 is ready to print. Touch a button on the control panel to set the print pitch (3 choices), to select the typeface and to print in either draft or NLQ mode. You can even set left and right margins, make top of form settings and control forward and reverse feed in the smallest pitch.

MP200

NIP200
200 cps in draft. 40 cps in NLQ mode. 7K buffer as standard (128 downloadable characters in NLQ) optional 8K memory. IC font cards. Auto insert—Loads paper automatically to top of form. User friendly control panel—easy print pitch selection. I/F board—quick change of interface to match applications. Cut sheet feeder (optional double bin auto sheet feeder). IBM compatuble. £274.85




MP201

Same as MP200 with 136 columns £318.55

MICRO P MP165

80 Columns. 165 cps in draft mode. 35 cps in NLQ mode. Ultra high resol-ution graphics. Friction and traction feed. Compatible with all major micros. Quiet and easy to use. 2 Year warranty. Epson or IBM compatible control codes. £199.00



CITIZEN MSPIOE

The new MSPIO with 160 CPS Draft and 40 CPS NLQ. With TWO years Warranty £269.00

CITIZEN MSP-15E

17" Wide carriage . 136 column, operating at 160 cps and at the push of a switch will print near letter quality at 40 cps. Fully Epson and IBM compatible. 8k of standard buffer built in. Standard Centronics are optional RS232 £379.00




CITIZEN 120D

Dot Matrix Printer. The 120D

precision printer brings to the small business, educational and home user good quality and attention to detail. Its compact size, host of detail. Its compact size, host of standard features and built in quality and reliability that supports Citizen's unique full TWO-YEAR warranty make it a must for all computer users. Fast draft output: 120 cps. Built-in NLO: 25 cps. IBM and Epson compatible. Plug-in interface cartridge. Tractor and friction feed as standard. Optional cut sheet feeder. sheet feeder.

SOURCE The Complete Solution INTRODUCES THE NEW **TECO VP1814**



Dot matrix printer. VP1814 is fast highly reliable and easy to operate.

\$\times\$ Standard 80 column
\$\times\$ The high-speed, low energy consumption 9 wire dot head gives printing speed of 189 cps and NLQ speed 36 cps
\$\times\$ Bi-directional, Logic seeking in text mode

mode

*The use offan-fold, roll or cut-sheet
paper is possible with adjustable
sproket pin feed and friction feed

*Offers emphasized, double print,
super script, sub script

*Justified print mode are also

*Justified print mode are also available including left, centre, right and full justification #9 graphic modes are available #Both download and inprint buffer can exist simultaneously *7K input buffer standard can be expanded to 15K *Printing modes selectable at front panel (NLO/draft, Pica/Elite, enlarge, emphasize, condense, italic *11 Language international character font is internalized #Both IBM and Epson compatable MAIN UK DISTRIBUTOR SPECIAL INTRODUCTORY PRICE (inc. VAT) \$229.00

DAISYWHEEL



PANASONIC KX-P3131

A Fully Formed Serial Impact
Daisywheel printer with print speed
of 17cps. Diablo compatible print
wheels. Print pitches available are:
10, 12, 15 and proportional spacing,
Standard friction feed and optional
tractor. Paper width 13.5 inches.
Standard Centronics optional RS232C. Built with 6K text buffer
expandable to 32K buffer. £249.00

STAR POWER TYPE £229.00

BROTHER HR 20

The new Brother Daisywheel HR 20 8K standard buffer upgradable to 16k. Comes standard with serial and parallel port £369.00

DAISYWHEEL PRINTERS

OUENDATA DWP 1120
with optional tractor/sheet feeder and
13" paper width facility. This Daisywheel
printer with 20 CPS has 96 character
printwheel compatible with the QUME.
Standard centronics interface.
(optional RS232 C)
Juki 6100
Livi 2200
6275 00

£169.00 £285.00 £275.00 £799.00 Juki 6300



PRINTER STAND

PHINTER STAND
Fits nearly any width or printer.
Allows paper storage and gives ideal viewing position. Can also be used for computers and monitors. Steel construction prevents bending or buckling £18.00

You can purchase any of the items listed. All you have to do is write your requirements on a sheet of paper, and we will despatch your goods within 24 trours, subject to availability. Please add the following amounts for Postage and Packing.

amounts for Postage and Packing.
Items below £10.00 add £1.50
Items below £100.00 add £2.50
Items below £100.00 add £3.50
Items over £100.00 add £3.50
(UK Mainland only)
All prices include VAT at 15%
Prices correct at time of going to press but subject to change without notice
Please make cheques payable to:

Please make cheques payable to: TWILLSTAR COMPUTERS LTD.

TWILLSTAR COMPUTERS LTD.
Access/Visa Card Holders:
Welcome. Call now on:01-571 5938 or 574 5271
TELEX: 25247 Telex G attn TIL
FAX: 01-574 4326
ASK FOR YOUR FREE
CATALOGUE AND PRICE LIST CATALOGUE AND PRICE LIST

Visit our **NEW SHOWROOM** Open 9am-6pm Mon-Sat **OPEN SUNDAYS 10-2**

CREDIT FACILITIES Full credit facilities now available

nationwide LOW DEPOSITS

FAST FRIENDLY SERVICE


VUP TO 3 YEARS TO PAY
Ve have negotiated with a leading inance Company to provide this dditional service for our clients. Call or further details Typical APR 36.3%





BLANDFORD ROAD, NORWOOD GREEN, SOUTHALL. MIDDX UB2 4HD Tel: 01-574 5271 01-571 5938 Telex: 25247 Telex G. attn TIL

One Full Year for just £12.90



We are specialists on the BBC Micro, Master and Compact computers, established in April 1982 following the launch of the original BBC Micro.

For £12.90 we will provide you with:

Free access to our technical support team (by phone or letter), to give impartial advice and help on any computer, hardware or software problems that you may have. 64 page magazine mailed directly to you ten time a year. This will keep you up to date with news, reviews, hints and programs for your computer.

Quality, free programs for you to type in (also available on tape/disc) covering everything from printer buffers to windows & icons.

A swift mail order service for all your hardware & software needs at competitive prices, with a further 5% discount to you as a member.

A showroom to try out the latest peripherals and software with absolutely no obligation, and with knowledgable staff on hand.

Free personal adverts in the magazine to sell your unwanted kit.

Join 20,000 satisfied members!

For A Limited Period All New Members Will Receive A Special Welcome Pack Including:

- Disc containing 14 really useful programs
- 56 page booklet packed full of information
- Quick reference card to your computer
- Handy function key strip & screen planning sheets
- Plus a booklist, software catalogue, local user group list, magazine indexes etc.
 And of course your personal membership
- * UK membership only.

NATIONAL USER GROUP FOR THE

BBC MICRO, MASTER & COMPACT

INFORMATION _	I would like to enrol as a	membe c	rofBEE ofBEEB Disc	BUG for 1 UG magaz	
NEWS NEWS	Your Machine	40T	80T	3.5"	EITHER Post today to: BEEBUG, Dept AU4,
	Model B				Dolphin Place, Holywell Hill,
REVIEWS	Master 128				St. Albans, Herts AL1 1EX
EDEC DOCODANG	Master Compact				OR Phone St. Albans
FREE PROGRAMS	Please tick (0727) 40303				
INTERESTING ARTICLES	lenclose £(enter correct amount*) OR Please debit by Access/Visa Account £ Card Number				
IIII ARTICLES					
ADVICE ADVICE					Card Expiry Date/
	SURNAME			_ INITIALS	STITLE
TECHNICAL HELP	ADDRESS		X		
10 MAGAZINE/YEAR					POSTCODE
10 MAGAZINE/TEAR	SIGNATURE.				

*SUBSCRIPTION RATES

£19.00 £23.50

£26.00

CIK, BFPO, CI
Rest of Europe
Middle East
America & Africa
Elsewhere
All payments MUST be in
pounds sterling. Cheques
MUST be drawn on a UK bank.

FOR A FREE BEEBUG INFORMATION PACK PHONE 0727 40303

Start your year here!

N EWS



RAM cards and phone link

Briefcase Acorn

Acorn's 16-bit Communicator micro will soon appear in pharmaceutical reps' briefcases.

Advanced Medical Communications, which supplies the pharmaceutical and health markets with communications equipment, has ordered the machine packaged for use on the road. The Spectar II has a bar code reader for data entry and uses credit-card size memory packs, each with up to 4Mb of, say, promotional software.

The Spectar II comes with View and ViewSheet, a built-in modem and communications software. One version has a flat screen in the briefcase.

View mastered

A book has been launched for Master owners baffled by the lack of *View* documentation with their machines.

Labouring under the title of Mastering View, ViewSheet and ViewStore, Clive Williamson's book should be of value to anyone new to these popular software packages. But it is Master owners who will benefit most as View and ViewSheet come with the machine but without manuals.

The book covers everything from the basic features through to advanced uses. It is particularly useful when it comes to linking the programs – something which tends to be very confusing in the manuals

The book is published by Sigma at £12.95.

MPs row over micro 'gimmick'

By Bill Penfold

A party political row threatens micro-education as fears grow that Britain is in danger of losing its world lead in class-room computers. Opposing party spokesmen have labelled Conservative support as 'a gimmick' and 'complacent'.

Education Secretary Kenneth Baker has hailed as a 'trail blazer' the Government's achievements in supporting school microelectronics.

Focusing on the £3 million a year Microelectronics Education Support Unit (MESU), the Minister claimed countries around the world were following the 'British model'. And the MESU was just part of a

'stream of positive initiatives' planned to consolidate the progress already made, he said.

There was also a £500,000 scheme examining possible interactive video uses in schools, plus a £750,000 allocation for developing a database of curriculum materials.

But Labour's Shadow Education Secretary Giles Radice dismissed the announcements as 'typical Baker gimmicks which are not followed through. Far more resources are still needed to provide equipment plus software and ensure teachers are properly trained.'

Similar criticisms came from the Alliance's Education and Science Spokesman, Paddy Ashdown. Complacency, he feared, was the main danger of the Government's present approach to micro-education, combined with a lack of real commitment.

The Education Secretary reported a recent survey in his department showed an average of 14 micros in every secondary school — an average of one for every 60 pupils.

However, Ashdown argued that the success of a micro-education scheme could not be judged merely by the number of computers. Equally important, he felt, was software development and use of these micros. Radice added: 'It all boils down to money.'

Keyboard extends Music 5000 system

Hybrid Technology has launched a music keyboard to go with its Music 5000 system.

Called the Music 4000, the keyboard attaches directly to the BBC micro through the user port. It comes with a sustain pedal and extensions to the Music 5000's Ample software at a mail order price of £161.

Hybrid originally looked at providing a keyboard for Acorn's Music 500, but decided against it because of poor sales.

With the keyboard, the micro can be used as a straightforward synthesizer, playing music directly using the sounds generated by the Music 5000.

But its main use will probably be with the music editing facilities, using the keyboard to enter notes directly onto the staff or into text form, and the recording of music for conversion to music notation.

The keyboard allows up to eight notes to be played simultaneously, and has built-in special effects, including echo, stereo and transposition.

The keyboard software extends the facilities available on the original Ample program. The additions include extra control panels, the keyboard special effects and extra instrument sounds.



Educational

The Spring issue of School Computer User is out. It is free to schools, but if you don't qualify it is available for £3.50 for three issues from Redwood Publishing, 141-143 Drury Lane, London WC2B 5TF.

Masterpieces...



At Akhter we believe in freedom of choice which is why we have many combinations of disk and streamer products available for you. All these products are designed and manufactured in the U.K. and conform to the highest UK industry standards. With products ranging from stand alone 20 Mbyte Hard disk drives through to complete subsystems comprising of 20 Mbyte hard disk with 10 Mbyte Streamer and 1 Mbyte floppy disk we feel we can meet even the most stringent of applications.

MODEL	DESCRIPTION	PRICE
HD 1000	10MB HARD DISK WITH POWER SUPPLY	£599.95
HD2000	20MB HARD DISK WITH POWER SUPPLY	£699.95
HD4000	40MB HARD DISK WITH POWER SUPPLY	£1995.95
HD 1085	85MB HARD DISK WITH POWER SUPPLY	£1899.00
HD1140	140MB HARD DISK WITH POWER SUPPLY	£2995.00
STREAMER 10	10MB TAPE STREAMER WITH PSU	£749.95
ARCHIVE	10MB STREAMER - IMB FLOPPY WITH PSU:	£949.95
NUCLEUS 20	20MB + 10MB STREAMER + IMB FLOPPY*	£1599.95
NUCLEUS 40	40MB + 10MB STREAMER + IMB FLOPPY*	£1995.95
UFD 2000	20MB+IMB FLOPPY	£1995.95
HFD 2000	20MB + 10MB STREAMER*	£1495.95


USER FR.



AKHTEK GROUP PLC. AKHTER HOUSE, PERRY ROAD

AKHTER HOUSE, PERRY ROAD, STAPLE TYE, HARLOW, ESSEX, CM18 7PN. UK TT: HARLOW (0229) 34 (521

All prices include V.A.T.

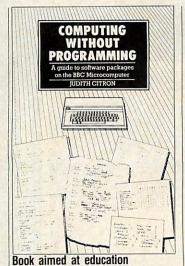

Don't program, read the book

Computing Without Programming is a book for people who prefer to use ready-made software rather than their own.

A simple introduction to the various types of software for the BBC micro, such as databases and spreadsheets, it takes a close look at a couple of examples of each, with project ideas for using them.

Author Judith Citron runs an Education Computing Advisory Service, which indicates the book's main target—teachers choosing software and those running information technology courses.

Published in paperback by Chapman and Hall, it is priced at £9.50.

The big show

The next Acorn User show will be bigger and better than ever.

As usual it will be held at the Barbican in London – in the Red Hall this year – from 23 to 26 July.

One of the notable features about this year's event will be the emphasis on business and educational computing.

There will be a special Business and Educational Day, and a series of associated lectures and seminars, plus the usual discounts, will run throughout the four days of the show.

ACP takes over Plus 1

Advanced Computer Products (ACP) has been licensed by Acorn to build, sell and service the Plus 1 add-on interface for the Electron.

The Plus 1 will now be produced under ACP's name, although it will be identical to the Acorn version. 'There's a lot we could change,' explained ACP's John Huddlestone, 'but we don't want to delay launching it.'

Huddlestone hopes to keep

the price of the Plus 1 pegged to below £50.

ACP has taken the original moulds and tooling, and will also be obtaining many of the components from Acorn, all in order to help keep costs down.

Acorn stopped making the Plus 1 around 18 months ago, when it had large stockpiles, although it has continued to support the product.

But ACP says that it is getting up to 50 calls a day from customers who need the Plus 1 to run ACP's own products, including the Advanced Plus 4 disc interface, the Plus 5 Tube interface, 1 MHz bus and user port adapter, and ROM and sideways RAM adapters.

Huddlestone attributed the demand for the Plus 1 to the Electron's current low price, 'It's one of the best value micros around', he said. 'But most people want to upgrade it once they've got it.'

Musicians join up

The DCT Database, a viewdata format bulletin board run by Dudley College of Technology, is expanding its popular Ample section for Music 500/5000.

It includes downloadable music files as well as articles, and will be updated every two weeks. Sysop Alistair Johnston from Lancashire hopes to add an 'Ample surgery' to help those with problems.

DCT is free and runs 24 hours a day on (0384) 239944.

Meanwhile, the Musictel net-

work (AU December page 15) is expanding. There are now five individual boards with a common structure.

The Musictel 2 board, for example, includes pop and special charts, tips and topical TV listings. There is also downloadable music software.

This is on (0482) 653755. The other boards are: Musictel on 01-455 0843; Musictel 4 on (0695) 421493; Musictel+ on (0843) 590000; and Musictel 500 on 01-458 9704.



Plotmate A3M with Linscan

The plot thickens

Linear Graphics is extending its Plotmate range with more plotters and software.

The A4S and A4SM are upgrades of previous A4 plotters. Both have integral keypads for operating settings and protective coatings for the drawing surface. Prices are £370 for the A4S and £450 for the A4SM.

Software includes a £25 disc for Bitstik owners to dump pictures straight to the plotters.

The company also has a software chip, *Termplot*, for the BBC micro to act as a Tektronix graphics terminal to a mainframe. Pictures can be downloaded to the micro's screen or to the plotter.


Linear Graphics is also extending to the end of 1987 its educational support scheme, allowing educational establishments special discounts of up to 30 per cent.

Reuters edit on BBC boards

Acorn is making the Master's motherboard available for special applications. Meanwhile Reuters, the news agency, has taken delivery of the final batch of its order of boards based on the BBC micro.

The Master can be bought as a simple board, or in conjuction with any of the other parts of the machine like the keyboard. Most orders are expected from companies to repackage the system.

Reuters is using the BBC micro boards, known as application processor modules (APMs), to provide editing terminals for its desk staff. The boards are networked using




Master motherboard

Econet and extra interface circuits. The order has grown from 500 to 2000.

Reuters programmed its own software using BCPL, although BBC software is also used.

for the BBC &...

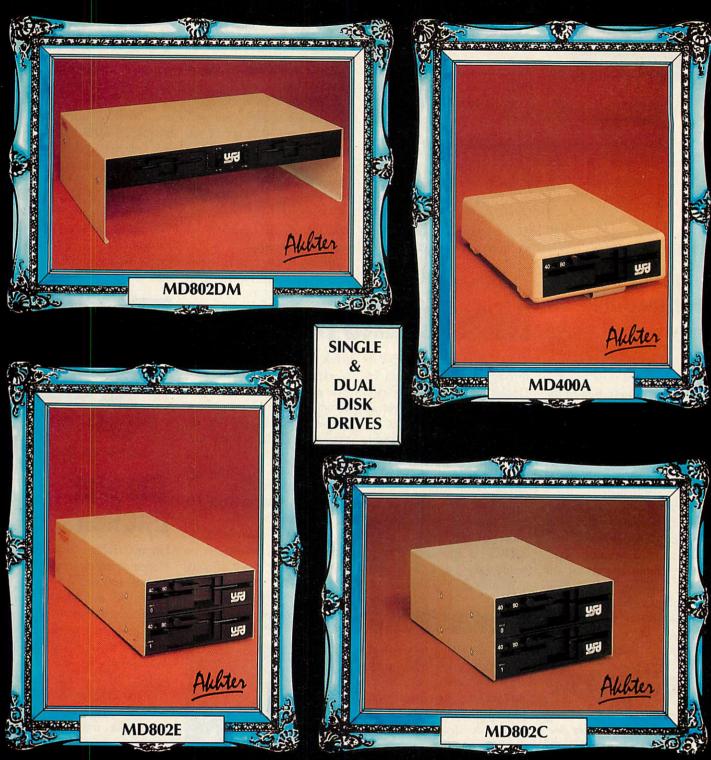

At Akhter we believe in reliability which explains why we choose a floppy disk drive mechanism with the highest pedigree to use in our boxed drives using the Mitsubishi, floppy disk drive, which includes characteristics such as glass welded head/white heads, all helps to make the unit robust and durable and gives us the confidence to offer a 2 year warranty on this selection of our floppy disk drive units.

MODEL	DESCRIPTION	PRICE
MD400A	400K Drive. Double Sided with 40/80 track switch	£139.95
MD400B	400K Drive. Double Sided with 40/80 track switch+P.S.U.	£154.95
MD802C	Dual 800K drive with 40/80 track switch	£269.95
MD802E	Dual 800K drive, double sided, with 40/80 track switches and P.S.U.	£299.95
MD802DM	Dual 800K drive, double sided, with 40/80 track, P.S.U. mounted in plynth.	£324.95

All 5¼" Drives have 40/80 track switch mounted in front plate of disk drive.

All prices include V.A.T.





AKHTER GROUP PLC. AKHTER HOUSE, PERRY ROAD, STAPLE TYE, HARLOW, ESSEX, CM18 7PN. UK

TEL: HARLOW (0279) 44 3521

The Comms Column

Let your fingers do the walking...' on to computer keyboards. The Yellow Pages are going electronic. Electronic Yellow Pages (EYP) can be dialled direct on:

300/300 baud (0734) 586255 (scrolling text format)

1200/1200 baud (0734) 597231 (scrolling text format)

1200/75 baud (0734) 585151 (viewdata format)

Alternatively, through a gateway port, all Prestel users can enter the system at local call rates with their standard viewdata software. The EYP database starts on Prestel page *381#. The gateway is entered from page *381381#. Keyword searches are used extensively.

EYP has an office-hours helpline on Reading (0734) 506259, and there's a leaflet. Currently, EYP covers Watford, Reading, Guildford, and London. There is no charge other than phone costs.

Pace's Linnet modem now has BT approval, and is available in the UK. At £139 plus VAT, it offers Hayes compatibility and a wide range of features. Details on (0274) 488211.
The official Prestel magazine has been taken over by Marathon Videotex. The new management wants more editorial, and for the magazine to be available through newsagents, increasing public awareness of the medium.

There are 120 more local call lines for accessing Microlink, the low-cost subscription to Telecom Gold, due to a nationwide datalink set up in conjunction with Debenhams Stores. These will cut down on long-distance telephone charges, but the usual PSS costs apply. Details are available on Microlink. Type 'EXTRA' followed by Return at the 's' chevron prompt. Prestel did not comment on when it would introduce its own entry system into BT Gold.

Schools to trial more Domesday discs

The Council for Educational Technology (CET) is to start trials on a range of interactive video disc packages for schools.

The Interactive Video in Schools (IVIS) project has been developing eight packages to cover a wide area of the curriculum in primary and secondary schools. It has also built up a library of images for use in future packages.

The packages include one which simulates a visit to a French town. Others cover

design, environmental studies, weather, urban development and mathematics.

Initially, 32 schools will be used for the trials, many of which have already been involved in helping to produce the material. When trials are complete, 30 more schools will be added and will receive all eight packages.

The packages will run on the Domesday Project hardware, which includes a modified Master computer. But other sys-

tems are also being looked at.

The National Centre for Information Technology has launched an interactive video package based on the BBC microcomputer and a standard VHS recorder. The interface for the micro costs £275, and includes both control software and database routines to set up the video tape.


The Interactive '87 exhibition and conference will be held at the Brighton Metropole on 1-3 December 1987.

Board gives 4096 colours

A colour graphics board has arrived from a new company called Saturn Computers.

The Saturn Palette Extension (SPX) board gives a choice of 4096 colours, any 16 of which can be used at once in mode 2. Colours can be redefined in all modes from Basic and machine code, or using an operating system command.

For BBC B and B+ machines, it costs £50. A planned Master version will allow



Extended range of shades from primary to pastel

rapid switching of palettes and give more colours on screen – for example, up to four in 80

column modes, instead of the usual two. The Master version will cost £60.

Micro on a Eurocard

Another miniature version of the BBC micro is available for plugging into other terminals.

Cambridge Microprocessor Systems (CMS) has followed up its tiny Microbeeb card with a new version mounted on a 3U Eurocard – a standard electronic component card – for use with existing systems.

The Euro-Microbeeb can be attached to any type of computer for programming. The unit can then be run as a standalone micro. A wide range of



Crammed with connectors

inputs and outputs are present, with a real-time clock and battery-backed RAM. BBC Basic, Forth, Pascal, 6502 machine code and assembler are all supported.

New AU staff

It's all change at Acorn User. Bruce Smith has been lured away to the bright lights of desktop publishing, and two new people have joined.

Steve Mansfield has come in as Deputy Editor, putting together the news and reviews.

Graham Bell is AU's new Technical Editor, and will handle the listings, as well as look after Redwood's Econet.

Fortunately, Bruce hasn't severed all ties with the magazine. He will still be writing for *Acorn User*.

Master Series...



At Akhter we listen to our customers and observe market changes. Such observations have led us to design and manufacture both 3½" and 3½" + 5¾" customised configurations with our proven ability in quality assurance we are able to offer these specialist products at standard pricing. Versatility, variety and value for money makes Akhter first choice for add-on disk drives for the BBC & Master Series Acorn computers.

MODEL	DESCRIPTION	PRICE
MD400F	400K 31/2" dual case	£125.95
MD400G	400K 31/2" dual case + P.S.U.	£139.95
MD802F	Dual 400K 3½" Floppy	£219.95
MD802G	Dual 400K 3½" Floppy+P.S.U.	£239.95
сомво с	3½+5¼ Floppy in Dual Format	
СОМВО Е	3½+5¼ Floppy in Dual Format+P.S.U.	
COM- PACT 5¼ SINGLE	Master Compact with internally fitted single 5¼ floppy.	£499.95
COM- PACT 5¼ DUAL	Master Compact with internally fitted dual 5¼ floppy.	£639.95
	or supplied.	STATE OF
THE	All price	es include V.A.

USER FR AKHTER



AKHTER GROUP PLC.

AKHTER HOUSE, PERRY ROAD, STAPLE TYE, HARLOW, ESSEX, CM18 7PN. UK

TEL: HARLOW (0279) 4435; TELEX: 818894 AKHTER G



The best news this month for Acorn Master users ...

MASTER REPLAS

..... is now available

*** TAPE TO DISC TRANSFER ***

*** BBC 'B' TAPES CAN BE USED ON THE MASTER ***
(with kit fitted)

*** SAVES FROM 32K RIGHT UP TO 128K ***

*** FANTASTIC PERFORMANCE IN ALL ROUTINES ***

This superb Tape-to-Disc utility which BBC 'B' owners have used and applauded for nearly two years is now offered for the Acorn Master computer. All the features of the BBC 'B' REPLAY have been enhanced and additional routines included to make this the best transfer utility possible, and the one against which other systems will be judged.

Features include:

- * Easy to use fully menu-driven utilities.
- * Can 'retrieve' a screen display from a program and save this to a separate file ready for printing.
- * Built-in formatting and verification of discs.
- * Program modifications (cheats) possible.
- * Sound on/off and screen positioning features.
- * Automatic file creation for saving to a REPLAY disc at any required time.
- * Saving of as much memory as required, from the basic 32K right up to the full 128K.
- * Double density 18 sector operation, with up to 22 files per disc.
- * Completely invisible to the computer when not in use, and thus impossible for it to interfere with other software.
- * Operation throughout is by the built-in switch and single key presses on the computer keyboard.
- * Contains software to run the 'Master to B' conversion kit which will permit most BBC 'B' tapes requiring the O.S.1.20 ROM to be used on the Master.
- * Easy, no-soldering installation.
- * Creates 'coded' discs, complete with original protection, to allow personal back-up without piracy.

MASTER REPLAY is sold in two versions: both require the IMbit ROM to be socketed

MASTER REPLAY (Self-contained) — £41.95
MASTER REPLAY (For use with ROMBOARD '3') — £36.95
MASTER to B conversion kit — £9.95 incl. O.S. 1.20 ROM
(Only works with REPLAY present).

ROMBOARD '3' is an internal board taking three ROMs which can 'overlay' any of the Operating Systems' built-in ROM software. The computer must have a socketed IMbit ROM. *Price £19.95*

All prices include VAT and post. For other products please see last month's edition.



VINE MICROS, MARSHBOROUGH, NR' SANDWICH, KENT, CT13 0PG. Tel: 0304 812276



wo shows Acorn users shouldn't



TWO showcases to keep you right up to date with all the new products now available - plus lots of bargains at rock-bottom prices!

Buv your tickets NOW and save

per head!

Wherever you live there's a show dedicated to your favourite computer that's within easy travelling distance of your home.

Advance ticket order for the Manchester Show

Advance ticket order for the London Show

C. Carrier
BBC MICRO
E S

dult tickets at £2 (save £1)£	ER SHO	UMIST, Manches March 20-23
ador 16a tialysts at 64		

Cheque enclosed made payable to Database Publications Ltd.

Please debit my credit card account Access/Visa

dmission at door: 3 (adults), £2 under 16s)

Post to: Show Tickets, Europa House, 68 Chester Road, Hazel Grove, Stockport SK7 5NY.

PHONE ORDERS: Ring Show Hotline: 061-480 0171

☐ Adult tickets at £2 (save £1) £

Under 16s tickets at £1£_

☐ Cheque enclosed made payable to Database Publications Ltd.

Please debit my credit card account

New Horticultural Hall, London, May 8-10

Post to: Show Tickets, Europa House, 68 Chester Road, Hazel Grove, Stockport SK7 5NY.



Better print from music

Mid Sussex Software, which specialises in music products for education, has updated its transcription software for putting music on to paper.

The Music Processor package, launched last June, is a set of linked programs for entering, editing and printing music scores. It has already been used extensively in education.

Version Two has new features including automatic layout, a copy facility for repeated bars and sections, extract files and single part playback. It should be available in March. Another update is planned for September using memory overlay techniques with playback for up to three parts.

The price of the package is £49.95, but existing *Music Processor* owners can upgrade to Version Two for £6.

News in brief

© Creative Sparks is moving into full-price software. Already known for its Sparklers and Super Sparklers budget labels, the company has now added the Status Software name. The new label will concentrate on the quality games market.


Budget software firm Mastertronic has bought Melbourne House, known for *The Hobbit* and *Way of the Exploding Fist*. Melbourne House will continue and will, the new owner says, release around 14 titles in 1987.

100,000 Masters sold

Acorn claims to have sold over 100,000 Masters, a large proportion abroad.

In Hong Kong, 700 Master 128s are to be distributed between 55 schools and five teacher training colleges. Acorn's general manager in Hong Kong, Martin Riley, claimed that the colony's government went for the BBC micro because of the large amount of available educational software. Other factors were said to be price and Acorn's technical support and servicing.

Four schools' contracts have now been awarded by the Hong Kong government, with Acorn winning the last two. Atari, Ap-



Rebadged as Olivetti Prodest

ple and IBM also competed.

Another major deal has been signed by the West Glamorgan local education authority, which has ordered 500 Compacts from Swansea-based dealer Bucon. The machines are to be fitted

with Mertec Compact Companion interface boards.

The deal is worth about £300,000 and follows a £250,000 order from the authority last year for Econet systems.

At the Compact launch last September, sales of the Master 128 were put at 30,000 by Acorn, so the new figure marks a dramatic increase, although UK sales of the Compact were thought to be disappointing.

Acorn would not release a breakdown but it's widely believed that Compacts account for around half. The majority of Compact sales have been overseas – mainly to Olivetti in Italy.

Viewdata rival for Prestel

Prestel is about to get a run for its money with the launch of a new online service.

The system, Epnitex, is being run by the people who produced the Timefame section on Prestel: the two parted company following a dispute over the type of information Timefame was allowed to provide.

Like Prestel, Epnitex is de-

signed to be a carrier service, with independent information providers (IPs) putting up the pages. It's aimed mainly at business, although there are bulletin board pages and chat facilities for private users.

Although accessible using standard viewdata software, Epnitex claims a number of improvements over Prestel, in particular improved graphics facilities, and dynamic and special effects frames being available free to IPs. Pages can also be updated in real time. Companies will be able to set up closed user groups – for their customers or dealers, for example.

The electronic mail is claimed to better Prestel's, with word-processing, advanced graphics such as mixing text and graphics, and graphic character editing.

The system is still on test. Its founder, Roy Norman, said he wants it 'to be perfect before we start', but says he has already had interest from several possible major IPs. It is hoped the system will be online by the summer, with nationwide local call rates.


Compact Aviator dropped

In spite of the Aviator simulator being featured in Acorn's original list of software 'to be released soon' for the Compact on 3.5-inch disc, Acornsoft said that it is now very unlikely that it would appear in that format.

Reasons given include possible technical problems, but author Geoffrey Crammond insisted that the program is 'legal' and should run.

Acorn also claimed it was 'out of contact' with Crammond. Perhaps this is because he is now doing work for Firebird.

So the most likely cause is Acorn's third reason: that it simply wouldn't sell a worth-




No take-off for Compact

while number of copies.

Another product that never made it is the *Beginning BCPL* with the *BBC Micro* book, mentioned in an Acorn catalogue and the *BCPL* User Guide. Apparently the book's author 'went missing'.

AU on show

Acorn User will be at the Electron and BBC Micro User Show in the Renold Building, UMIST, Sackville Street, Manchester on March 20-22. We'll be upstairs, on stand 20, with reduced price discs, binders and software, plus special subscription offers. Why notdrop in?

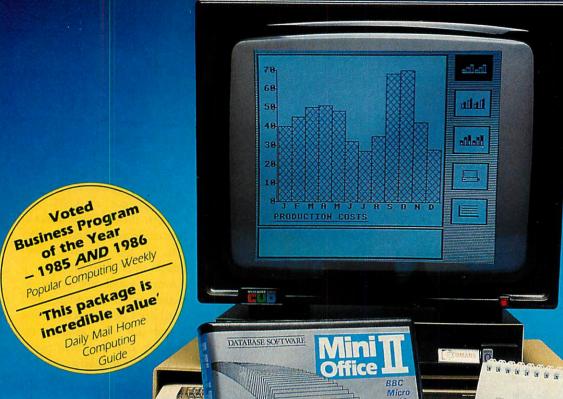

Six powerful home and **business** applications in just ONE package - and at a price that simply can't be matched!

WORD PROCESSOR

Compose a letter, set the printout options using embedded commands or menus, use the mail merge facility to produce personalised circulars - and more!

SPREADSHEET

Prepare budgets or tables, total columns or rows with ease, copy formulae absolutely or relatively, view in either 40 or 80 column modes, recalculate automatically - and more!

GRAPHICS

Enter data directly or load data from the spreadsheet, produce pie charts, display bar charts side by side or stacked, overlay line graphs - and more!

DATABASE SOFTWARE

DATABASE

Mini Office II

Build up a versatile card index, use the flexible print-out routine, do powerful multi-field sorting, perform all arithmetic functions, link with the word processor - and more!

COMMS MODULE

Using a modem you can access services such as MicroLink and book rail or theatre tickets. send electronic mail, telex and telemessages in a flash - and more!

LABEL PRINTER

Design the layout of a label with the easy-to-use editor, select label size and sheet format, read in database files, print out in any quantity - and more!

36 St Petersgate, Stockport SK1 1HL. Tel: 061-480 0171

0	D	2	-	0	D	NA

Please send me Mini Office II for the BBC and B+

- ☐ £14.95 cassette ☐ £16.95 51/4" disc 40 track ☐ £16.95 51/4" disc 80 track

Please send me Instant Mini Office on rom for the BBC, B+ and Master

□ £59.95

I enclose cheque made payable to Database Software, or debit my Access/Visa card:

Exp. date

Signed

SEND TO: Database Software,

36 St Petersgate, Stockport SK1 1HL. Tel: 061-480 0171.

News in Brief

- The Institute of Opthalmology has been studying diabetes by examining the size of cells and blood vessels in the eye with a BBC micro and Grafpad. The specially-developed Digit software costs £70. Contact Dr B P Hayes, Institute of Opthalmology, Judd Street, London WC1H 9QS.
- For code breakers with micros, the American Cryptogram Association has started publishing a computer supplement to its magazine. The Treasurer of the ACA is at 12317 Dalewood Drive, Wheaton, Maryland 20902, USA.
- A speed of 115 lines per minute (480 cps) is claimed for Brother's 4018 heavy duty 18pin printer. It can also run at 150 cps in NLQ mode. Also new is the HR-40 40cps daisywheel machine with a noise level of only 55dB.
- The newly-formed Association for Computing in Art and Design Education, ACADE, has sections for primary, secondary and further education and groups for particular subject areas. Individual membership is £10 including newsletter and local meetings.

Contact Nigel Johnson, Gray's School of Art, Garthdee Road, Aberdeen A89 2QD.

Run your own board

Several new communications packages software appeared, including two for people who want to run their own bulletin boards.

NBBS Plus is an update of the successful bulletin board host software. The main addition is that it now handles viewdata protocols as well as the previous scrolling format. For those of you with modems, a demonstration is available on (0992) 552188. Price is £50.

If dial-up access isn't needed, the Electronic Tourist Board has released an educational version of its viewdata database software. The KIDS package has most of the features of an online system, like Prestel, but is designed to use in a closed



system - in a school, for example. The ROM based software starts at £30.

Finally, Beebug has released a general purpose communications ROM called Command which provides 50 commands allowing you to build a customised communications system. The ROM supports auto-dial and auto-answer modes, various types of file transfer and works in both viewdata and text modes. It costs £39.

Blunderbox

Nothing too major this time. To run the Kiddie Art program (January 1987 issue) on a Compact, the following changes are necessary:

130 *FX4,2

180 *FX225,3

190 *FX226,3

240 K%=GET-1:Z%=TIME

280 IF K%=82 PROCsv

290 IF K%=75 PROCld

This disables the cursor keys they can't be used to move the shapes around, but the function keys f2 to f5 can still be used for this purpose.

There was a minor problem in the March Hints and Tips Section. On page 47, in the Quick Fire corner, a vertical bar character was missed out. It should read: 'eg,!N for Ctrl-N and so on'.

Valiant turtle boost

Valiant is to release a series of 20 worksheets for teachers on the use of Logo with the company's infra-red turtle.

Three are already available covering geometry and arithmetic, and the 17 underway tackle a variety of topics in art, craft, geography, science and technology.

Gill Manvell of Valiant said the worksheets could be used

through primary and into secondary classrooms. Another development is the control of a turtle directly from a Concept Nursery Keyboard. school software is also planned.

In an effort to keep costs down the company charges £5 (cheque with order) for the first, and £1-£2 for each subsequent title. Valiant is at 370 York Road, London SW18.

OFFICE USE ONLY Date in:

Contacts

The news desk at Acorn User can now be contacted via Telecom Gold. Send your information to 81:RED001.
Acorn Computers: Cambridge Technopark, 645
Newmarket Road, Cambridge CB5 8PD. Tel:

Acor Computers: Cambridge Technopark, 645
Newmarket Road, Cambridge CB5 8PD. Tel:
(223) 214411.
Advanced Computer Products: 6 Ava House,
High Street, Chobham, Surrey GU24 8LZ. Tel:
(2276) 76545.
Beebug: Dolphin Place, Holywell Hill, St
Albans, Herts AL1 1EX. Tel: (0727) 40303.
Cambridge Microprocessor Systems: Brookfield
Business Centre, Twentypence Road, Cottenham, Cambridge CB4 4PS.
Creative Sparks: Unit B11, Armstrong Mall,
Southwood Summit Centre, Southwood, Farnborough, Hampshire GU14 ONP. Tel: (0252)
522200.
Electronic Tourist Board: PO Box 4, Brecon,
Powys LD3 7JS. Tel: (0874) 730692.
Linear Grabpics: 28 Purdeys Way, Rochford,
Essex SS4 1NE. Tel: (0702) 541664/5.
Saturn Computers: Flat 1, 12 Avenue Road,
Darlaston, West Midlands WS10 8AR. Tel:
021-526 6216.

POST A PROBLEM

Acorn User has a guaranteed fast reply service for enquiries. Your answer will be returned within 10 working days for just £3 (includes VAT), or your money back.

The idea is simple. Just write out your problem, fill in the coupon (right), and send both off to Acorn User with a stamped addressed envelope and cheque or postal order for £3. (If you want recorded delivery, add the cost of this on. The same goes for overseas readers.) Include as much detail as possible and a disc or cassette if a program is involved - with enough space to record any corrected listing.

We will then answer the problem and return all material received - within a guaranteed 10 working days from receipt. If we fail to match this promise your cheque or postal order will be returned with the answered question.

Please note: debugging readers' programs or those from other magazines is a complex task. Unless the problem can be spotted quickly, the service will only be able to make general comments or suggest a strategy for the reader.

ACORN USER	READER	SERVIC	E
141-143 Drury La	ne, London	n WC2B 5	TF

NAME		
ADDRESS		
- MARKETTAR		darkin a blanka
	POSTCODE	*
Daytime phone number	r 1 1 (c2 1	2.1
I enclose a cheque/pos problem.	tal order for £3 and	an sae with my

Date out:

Answered by:

A Disc Drive For Another Breakthrough

Don't waste your time and money trying to find a better disc drive bargain — at a stunning £69.95 this sensational sale offer from Opus is the best buy in Britain.

Our incredible sale price even includes VAT and our no-quibble 2-year warranty. What's more we'll deliver this quality disc drive to your doorstep anywhere in mainland Britain absolutely free of charge. But you'd better be quick off the mark, we're expecting quite a stampede!

OPUS 250K DISC DRIVE
From Opus you'd expect nothing less than the very latest in Japanese disc drive technology and our 51/4" single-sided 40 track drive is no exception. It features a super-reliable direct drive mechanism and offers both fast track-to-track access times and ultra-low power consumption.

OPUS DDOS

Should you need an interface for your new drive, we can even supply you with our easy-to-fit Opus double-density disc operating system for the amazing price of just £40.00. Its super compatibility makes it the perfect partner for all BBC micro models and Master Series computers. The Opus DDOS handles tape to disc transfers and is equipped with the same 1770 disc controller chip as the BBC B+.

SALE HOTLINE—0737-65080

To guarantee your sale bargain post the coupon today or ring the Opus Sale Hotline on 0737-65080. Generous education and dealer discounts available on request.

To Opus Supplies Limited, 53 Ormside Way, Holmethorpe Industrial Estate, Redhill, Surrey. Please rush me the following (PRICES INCLUDE VAT AND CARRIAGE).

Single Drive(s) at £69.95 each

Opus DDOS at £40.00 each. (Only when purchased with drive)

I enclose cheque for £ or please debit

my credit card account with the amount of £

Name

My Access Visa no. is (Please tick)

Telephone





Approved Acorn dealer

Peartree House, No 1 Blackstone Road, Stukeley Meadows Industrial Estate, Huntingdon, Cambs PE18 6EF. Telephone (0480) 50595



First, you will receive a 5% discount on all our advertised goods, and up to 25% discount on all repairs.

- You will be sent immediate details of all new products.
- Your order will be given priority.
- You will have access to our **Technical Hotline**, to help with any problems you may have.
- At the end of each year we will send you a **Gift Voucher** to the value of 1% of the goods you have purchased during the year.

Join our VIP Club and save £££££

Dear Customer

As part of our **First Birthday** celebration, we are offering a new **PEARTREE PRIVILEGE CARD**. It's our way of saying 'thank you' for your support and patronage over the last year. You represent our **future** and we hope that we can play an increasingly useful part in **yours!**

Your **Privilege Card** will cost you just £5—less than 10p a week—and for this you will receive **service** and **prices** which will be second to none:

All the benefits of this **Privilege Card** can be yours for just £5.00 per year; and as an added bonus, we will give you a **Gift Voucher** worth £6.00 when you introduce us to two of your friends who join the membership.

So please hurry and fill in the form on our last page, and mail it FREEPOST to our address.

Yours sincerely

V.G.M. Marketing Director

P.S.: The gift vouchers are only valid for purchase from Peartree. This Privilege Card offer is for private or company computer users, not for Educational and Governmental departments.



FOR THE MASTER COMPACT £69 ex. VAT

ACORN PRODUCTS
£49 ex. VAT

The Acorn



Now available from **Peartree** the Acorn Music 500 for the BBC, BBCB+, Master 128 and a new revolution on the

MASTER COMPACT

For the Master Compact comes with the 1MHZ BUS cartridge at:

£69.00 excluding VAT.

For the other Acorn products at:

£49.00 excluding VAT. only from PEARTREE

allig to.

▶ ACH034

PLEASE USE OUR CODES WHEN ORDERING





Approved service centre for all Acorn products.

Peartree House, No 1 Blackstone Road, Stukeley Meadows Industrial Estate, Huntingdon, Cambs PE 18 6EF. Telephone (0480) 50595

HARDWARE

ACH001	BBC MASTER 128 128K complete with View, Viewshe editor. ADFS 1770 DFS Battery backed up ram	£385.00 eet, basic
ACH002	BBC MASTER COMPACT 128K computer 640K disc drive be comp video, joystick and printer port	£375.00 uilt in RGB

ACH003	BBC MASTER COMPACT TV As above with PAL TV modulator	£395.00
N. Company Company		

ACH004	BBC MASTER COMPAC	T £445.00
	MONO	

As above with high resolution green monitor

ACH005	BBC MASTER COMPACT	£545.00
	COLOUR	

As above with RGB medium res colour monitor with video composite

ACH011	TURBO UPGRADE for	£99.00
	MASTER 128	
	65C102 an processor 4MM-	

65C102 co-processor 4MHz 64K ram extra high Basic, high editor

ACH012 512K MSDOS for MASTER £189.00
IBM compatible DOS plus 8186 processor

ACH013 BBC B 32K inc. ACORN DFS £329,00
Industry's favourite machine! Stocks available from time to time, please call

ACH014 BBC B+ 128K £365.00

Stocks available from time to time please call

ACH015 1770 DFS KIT for BBC B
Allows BBC to access disc drives

Allows DBC to access disc drives
Allows you to use ADFS as well

ACH016 ADFS ROM for 1770 £24.00

or BBC B+
Gives 720K per disc

ACH017 64K UPGRADE KIT for the £27.0

ACH017 64K UPGRADE KIT for the BBC B+ Upgrade your BBC B+ to 128K £27.00

ACH018 6502 2nd PROCESSOR £189.00
Compatible with BBC B, B+ and the Master with 64K ram and high basic

ACH019 Z80 2nd PROCESSOR £319.00
Complete with 64K CPM
Complete with vost range of business software

ACH020 32016 CO-PROCESSOR £999.00
32 bit processor
Complete with Fortran, Pascal, Cambridge Lisp,
C Basic and 32016 assembler

ACH021 ACORN CAMBRIDGE £3400.00
WORK STATION

4MB work station with 32016 co-processor

ACH023 TELETEXT RECEIVER £94.00

ACH024 IEEE INTERFACE £269.00

ACH033 2MHZ BUS INTERFACE £29.95
For Master Compact computers
Allows you to connect Music Synthesisers and hard disc systems

Simple plug-in cartridge

ACH034 ACORN MUSIC 500
SYNTHESISER
The old synthesiser going strong

ACH035 MUSIC 5000 SYNTHESISER £140.00
Compatible with BBC B, B+ and Master
Very user friendly with pull down menus

ACH038 MUSIC 5000 DEMO CASSETTE £2.95

All prices are exclusive of VAT.

ATTITUTE OF THE PARTY OF THE PA ATTITUTE ! ACHOO6 ECONET BBC MASTER ET 128 £300.00 No DFS Econet station with 128K memory ACH007 ECONET KIT £55.00 Upgrades for BBC B or BBC B+ ACHOOR ECONET STARTER KIT £79.00 ACHOO9 ECONET SOCKET KIT £29.00 ACH010 **ECONET MODULE** £43.00 Upgrade cartridge for Master 128 ACH022 ECONET 10 STATION LEAD SET £25.00 ACPOO6 PRINTER SERVER EPROM £39.00 Allows BBC machine to be a printer server station

DISC DRIVES



All Peartree Disc Drives have a two year warranty by Akhter Computers

ACH026 SINGLE 40/80 DRIVE, NO PSU 400K MITSUBISHI

ACH027 SINGLE 40/80 DRIVE inc. PSU 400K MITSUBISHI

ACH028 DUAL 40/80 DRIVE, NO PSU 800K MITSUBISHI

£229.00

ACH029 DUAL 40/80 DRIVE, inc. PSU 800K MITSUBISHI

ACH030 DUAL 40/80 DRIVE IN £289.00

ACH031 WINCHESTER 30MB (ACORN) with LEVEL 3

FILE SERVER

ACH032 WINCHESTER 20MB & £766.00
400K DRIVE

In monitor bridge for Master Built in fan and power supply Other sizes for hard discs are available, please call

£1449.00

ACORN PERIPHERALS

ACH037 ARIES B32 BOARD £79.00 32K Shadow ram for BBC B

ACP003 MEGAMOUSE
High quality UK manufactured
Fully AMX compatible

ACP004 WATFORD VIDEO DIGITISER £99.00
Use this superb digitiser by turning your favourite photographs into BBC's graphic mode, colour or

ACP005 MAGAZINE MAKER £139,00
Watford video digitiser and AMX page maker.
Please state when ordering for Master or BBC B

COMPONENTS

ACP007	EPROM 27256 32K	£4.95
ACIOO	32K eprom	24.75
ACP008	EPROM 27128 16K 16K eprom	£2.95
ACP009	EPROM 2764 8K 8K eprom	£2.75
ACP010	8K RAM CHIP Low power ram chips used in sideways	£2.50
ACP012	EPROM ERASER WITH TIMER	£29.95
ACP013	EPROM BLOWER Will program 2764, 27128, 27256 an	£69.00 and 27513
ACP023	ACORN BBC B KEYBOARD	£49.00
ACP025	ACORN UHF MODULATOR	£5.95
ACP026	ACORN 8271 DISC CONTROLLER	£39.00
ACP027	ACORN 8271 AND TTL Complete DFS kit	£49.00
ACP028	BBC B+ AND BBC B IBM LOOKALIKE CASE	£99.00
ACP032	ZEP 100 TORCH CPM FOR BBC 64K CPM TORCH	£199.00
ACP033	BBC MASTER DUST COVER	£4.50
ACP034	BBC B DUST COVER	£4.50
ACP035	BBC MASTER COMPACT DUST COVER	£7.50

MODEMS

ACPOIA PACE NIGHTINGALE



£9.00

	1200/75 75/1200 300/300 baud rates BT approved complete with cables
ACPO15	PACE NIGHTINGALE COMBO \$120.00

As above with Comstar software

ACP016 PACE ACCESSORY BOARD £42.00
Autodialler, autoboard rate selection

ACP017 PACE AUTODIAL DISK Sets up Comstar for autodial ACP020 WS3000V21/V23 MODEM

020 WS3000V21/V23 MODEM £285.00 Hayes compatible £159.00

Autodial, autoanswer Schools approved

ACP029 VOYAGER MODEM £59.00
ACP031 BBC MICRO VIEWDATA £49.00

ERALS SOFTWAI



Computer Concepts

ACS002 WORDWISE PLUS
Mode 7 editing, preview in mode 0
Multi document editing

ACS003 INTER SHEET £42.00

40, 80 and 105 column mode multiple spreadsheet

ACS004 INTER CHART £30.00

Built in Epson screen dump
Supports pie, line and bar charts

UTTING . THE . FUTURE . INTO . YOUR . HANDS







Peartree House, No 1 Blackstone Road, Stukeley Meadows Industrial Estate, Huntingdon, Cambs PE18 6EF. Telephone (0480) 50595



ACS012 VIEW 3.0

Computer Concepts

ACS005	INTER WORD 80 or 105 column word processor Continuous documents	£42.00
ACS006	INTER BASE	£55.00
	Compatible with all filing systems	

Card index mode, contains powerful Basic like programming language

£49.00 ACS007 ACCELERATOR Basic compiler can produce rom and ram format



£53.00

	For the BBC B, B+, 6502 compatible Including printer driver generator	
ACS013	VIEWSHEET Acornsoft standard spreadsheet	£36.00
ACS014	VIEWSTORE Complete with report generator Data can be imported from other view	£37.00 products
ACS015	VIEWSPELL Spelling checker for View with 70,000	£32.00 words
ACS016	VIEWPLOT Enables you to draw lines, pie graphs Compatible with Viewsheet	£24.00
ACS017	VIEWINDEX	£13.00

	numbers	
ACS018	VIEW PRINTER DRIVER GENERATOR	£9.00
	To be used to personalise View doc	uments with

Automatically creates indexes, notes, page

special features



ACS020	ISO PASCAL Full implementation of the ISO standard	£52.00
ACS053	The second secon	£29.00
ACS021	LOGO Good introduction for children with total support	£52.00 graphics
ACS022	TERMULATOR Terminal emulator enables the host complesent directly to the BBC's output drive	£29.00 outer to r
ACS023	COMAL Programming language standard in man European countries	£39.00
ACS024	Powerful screen basic editor	£25.00
ACS025	MICRO PROLOG	£60.00
ACS026	BCPL ROM	£49.00
ACS027	BCPL CALCULATION	£29.00
ACS028	BCPL STAND ALONE GENERATOR	£39.00
ACS054	FORTH ROM	£39.00
ACS055	FORTH DISC	£14.95

ACS056 MASTER LISP C-ROM

ACS057 LISP ROM

£49.00

£39.00

ACS058	MASTER LOGO C-ROM	£52.00
ACS059	6502 DEVELOPMENT PACK DISC	£39.00
ACS060	GXR for MODEL B	£23.00
ACS061	GXR for MODEL B+	£23.00



ACS029	CREATIVE SOUND DISC	£14.95
ACS062	TREE OF KNOWLEDGE	£9.00
ACS063	CREATIVE SOUND CASSETTE	£13.00
ACS064	PEEKO COMPUTER DISC	£9.00
ACS065	SPOOKY MANOR CASSETTE	£7.50
ACS066	SPOOKY MANOR DISC	£9.00
ACS067	TALK BACK CASSETTE	£7.50
ACS068	TALK BACK DISC	£9.00
ACS069	WORKSHOP CASSETTE	£7.50
ACS070	WORKSHOP DISC	£9.00
ACS071	ABC CASSETTE	£7.50
ACS072	ABC DISC	£9.00
ACS073	MICROTEXT DISC	£49.00
ACS074	MICROTEXT PLUS ROM	£199.00

OTHED SOFTWARF

ACS030	PRINTER BUFFER For the Master and the BBC B+	£6.95
ACS031	DOS COPY BBC/MS-DOS BBC MSDOS copies to or from many IBA MSDOS disc formats Compatible with all BBC products	£14.95
ACS032	CPMBEEB BBC/CPM	£14.95
ACS038	AMX MOUSE AND SUPERART	£65.00
ACS039	AMX DESK	£19.00
ACS040	AMX UTILITIES	£11.50
ACSO41	AMX SUPERART	£43.00
ACS042	AMX PAGEMAKER	£43.00
ACs043	AMX 3D ZICON	£21.00
ACS044	AMX DATABASE	£21.00
ACS045	AMX XAM	£21.00
ACS046	AMX MAX	£17.00
ACS047	THE ARTIST SOFTWARE	£39.00
ACS048	ARTIST AND MEGAMOUSE	£79.00
ACS050	ADVANCED DISC INVESTIGATOR Powerful disc utility Back up most protected discs Check and repair faulty tracks Compatible with the BBC B, B+ and the	£22.50
AC051	ADVANCED DISC TOOLKIT Compatible with all Acord products	£27.5

35 extra commands ADFS formatter and back up plus many more powerful utilities

ACS052 MUSIC 500 SOFTWARE £9.95 Ample software with full manual

> **PLEASE USE OUR CODES** WHEN ORDERING

All prices are exclusive of VAT.

	INIEKS	
PRTO01	EPSON LX86 PRINTER 120CPS NLQ mode Centronics Interface	£199.00
PRTO02	EPSON FX800 19 pin dot matrix 180 CPS draft mode 35 CPS NLQ mode 8K buffer Parallel interface standard 80 column	£399.00
PRTO03	EPSON FX 1000 19 pin dot matrix 200 CPS draft mode 35 CPS NLQ mode 8K buffer Parallel interface standard 136 column	£499.00
PRT004	EPSON LQ800 PRINTER 24 pin dot matrix 180 CPS draft mode 60 CPS NLQ mode 7K buffer Parallel interface standard 80 column	£499.00
PRT005	EPSON LQ 1000 PRINTER 24 pin dot matrix 180 CPS draft mode 60 CPS NLQ mode 7K buffer Parallel interface standard 136 column	£599.00
PRTO08	MP 165 PRINTER 165 CPS draft mode 40 CPS in NLQ mode 2K buffer Centronics interface Built in tractor feed Epson compatible	£199.00
PRTO11	JUKI 6100 PRINTER 18 CPS daisy wheel printer Standard ribbons Centronics interface	£279.00
The second second		

£799.00 **JUKI 6300 PRINTER** 40 CPS daisy wheel printer Diablo compatible

Serial or parallel interface please specify when ordering

£199.00 PRTO12 **EPSON FX80+** 160 CPS draft mode Extremely robust complete with pin feed (Limited stocks)

EPSON LX86/80 TRACTOR £22.00 PRT014

£59.95 **EPSON LX86/80 SHEET FEED** PRT016

£199.00 JUKI 6100, 6200, 6300 PRT018

Please specify for which model when ordering.

**Please Note We have many other makes of printers in stock such as



Always call for availability.





Approved service centre for all Acorn products.

Peartree House, No 1 Blackstone Road, Stukeley Meadows Industrial Estate, Huntingdon, Cambs PE18 6EF. Telephone (0480) 50595

MON001	01 HANTAREX COLOUR MONITOR MEDIUM	£199.00
400 00	Medium to high resolution	
	RGB interface	
	Composite video and sound input	

MON002 MICROVITEC 1451 COLOUR £249.00 MON MED Medium res monitor

RGB interface MON003 MICROVITEC 1451 A/P COL £279.00 MON MED

As above with audio and composite video input

Metal or plastic case, please state when ordering

MON004 MICROVITEC 1441 MON £449.00 COL HIGH Very high resolution monitor 895 pixels

RGB interface

MON005 TAXAN SUPER VISION £349.00 3 COL HIGH

Compact 12" high resolution RGB colour monitor Super high contrast tube 640 × 252 line resolution

MON006 MITSUBISHI 1404 MON COL MED

Super value medium resolution monitor

£249.00

£5.95

£14.95

£14.95

£10.00

£10.00

£6.95

£14.95

£16.95

MONOCHROME

MON008 HANTAREX GREEN MONITOR £65.00 The high resolution green monitor supplied to many education departments and hospitals

MON009 KAGA KX 1201 GREEN £99.00 MONITOR P31

MON010 KAGA KX 1202 GREEN £109.00 MONITOR P39

MON011 KAGA KX 1203 AMBER £109.00 MONITOR (PUL) MON012 PHILIPS GREEN MONITOR £69.00

MON013 ZENITH GREEN MONITOR £69.00 MON014 ZENITH AMBER MONITOR £79.00

Many other monitors are in stock. We can supply, please call for prices and deliveries.

EPSON PRINTER

GUIDE PT1

GUIDE PT2

MANUAL

COMMANDS REVEALED A comprehensive book which will guide you through the commands of Epson printers

BBC MASTER REFERENCE

BBC MASTER REFERENCE

VIEW MANUAL (BBC)

VIEWSHEET MANUAL

BBC USER GUIDE

DFS OPERATING SYSTEM

BBC ADVANCE USER GUIDE

MIS011

MIS012

MIS013

MIS014

MIS015

MIS016

MIS017

MIS024

MIS018	ADVANCED SIDEWAYS RAM USER GUIDE	£9.95
MIS019	VIEWSTORE MANUAL	£10.00
MISCEL	LANEOUS	
MIS020	40 TRACK BARE DISC DRIVES Double sided 200K	£89.00
MIS021	40/80 BARE DISC DRIVES Double sided 400K	£99.00
MISO22	20 MBG HARD DISC DRIVES Comes with host adaptor card and disc	
MIS010	SPECTRUM LOW PROFILE KEYBOARD	£24.95

LDS001 **BBC TO TV LEAD** £1.25 LDS002 BBC TO GREEN MONITOR LEAD £2.95 LDS003 **BBC TO SONY/KAGA** £5.95 **COLOUR MONITOR** LDS004 BBC TO MICROVITEC LEAD £2.20 LDS005 PHONO TO PHONO LEAD £1.25 LDS006 BNC TO BNC £2.95 LDS007 BBC TO CASSETTE £2.25 LDS008 BBC TO ACORN CASSETTE £2.25 LDS009 **BBC TO CENTRONICS** £9.95 LDS010 **BBC TO SERIAL PRINTER** £9.95 LDS011 **4 WAY MAINS TRAILING** £9.50 SOCKET LDS012 **CABLE FOR MODEM** £4.95 MASTER COMPACT £15.95 PRINTER LEAD

MIS001 PAPER 11×9.5 60GSM £16.95 2000 SHEETS PAPER 11×9.5 70GSM MIS002 £19.95 2000 SHEETS MIS003 PAPER 11.6×9.5 70GSM £19.95 2000 SHEETS PAPER 11.6×9.5 80GSM MIS004 £21.95 2000 SHEETS

MIS005	JUKI 5510	£4.50
MIS006	RIBBON FOR LX80 LX86	£4.50
MIS007	RIBBON FOR MP165	£5.00
MIS008	RIBBON KAGA KP810/ CANON PW1	£5.95
MIS009	RIBBON FOR EPSON FX RX/100	£7.95
MISO10	SPECTRUM LOW PROFILE KEYBOARD	£24.95
MIS023	RIBBON FOR CPA80	£3.50



Artist is a new 16k language ROM compatible with the BBC Micro, BBC+ and the new Master Series, allowing full manipulation of a mode-2 screen.

Copying specific screen areas to exclude certain colours. Drawing and painting underneath any colour combination. Making your brush cycle through a defined colour sequence. Colour pattern editing. Sprites of any size. Animation. Just a hint of how Artist is the most highly advanced software package yet designed, with features never before seen on the BBC Micro.

With the ultimate in art packages comes the ultimate mouse—Megamouse. Built to professional standards and comfortably shaped, it provides sensitive, accurate movement, that is unbeatable.

This exclusive Peartree offer includes the Artist ROM, the systems disc, a user's manual and an excellent grey shade Epson printer dump.

You have the option of buying the megamouse separately, or saving £10 by buying the complete package.

THE ARTIST

A masterpiece in colour graphics for only

The Artist is compatible with the AMX Mouse and the Megamouse is compatible with the AMX Software.

ACSO47 ARTIST SOFTWARE £45.00 **ACSO48 ARTIST AND MEGAMOUSE** £85.00










Peartree House, No 1 Blackstone Road, Stukeley Meadows Industrial Estate, Huntingdon, Cambs PE18 6EF. Telephone (0480) 50595

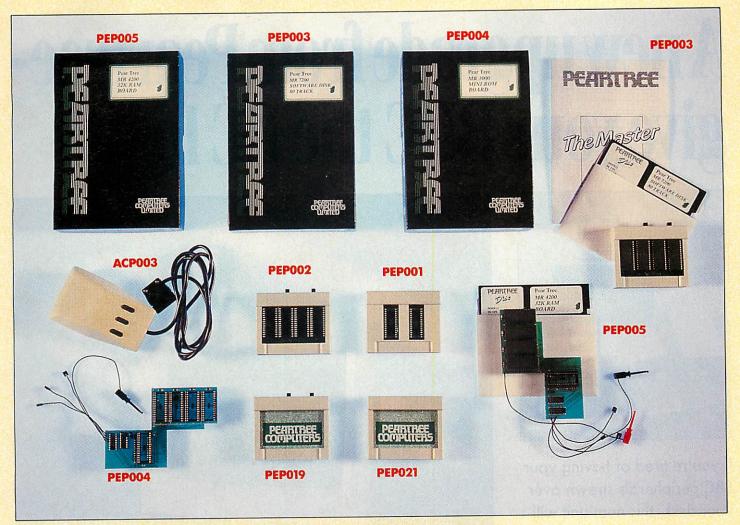

PEARTREE PRODUCTS

PEPO01	PEAR 1 ROM CARTRIDGE Add 32K rom to your Master	£7.95
PEP002	MR6000 MASTER CARTRIDGE Add 64K rom to your Master	£9.95
PEP003	MR7200 MASTER RAM CARTRIDGE Add 32K ram to your Master	£26.95
PEPO19	MR8000 MASTER RAM CARTRIDGE Add 64K ram to your Master Battery backed up Battery life five years	£33.95
PEPO20	2MHz BUS CARTRIDGE FOR COMPACT Plug it into your Compact and add a har a Music 500	£29.95
PEPO21	MR6600 MASTER COMPACT CARTRIDGE Add 64K rom to your Master Compact	£19.95
PEP004	MR3000 ROM BOARD Still going strong. This has proved to be popular mini rom board for the BBC Mc Add 4 extra rom sockets	£14.00 a very odel B

PEP005	MR4200 RAM BOARD Still going strong. Add 32K of sideway your BBC Model B	£26.95 ys ram to
PEP006	PEAR1 MASTER 128+FX80+ Acorn Master 128 Epson FX80+	£570.00
PEP007	PEAR2 MASTER 128 +DRIVE+FX80+ Acorn Master 128 Epson FX80+ 800K twin disc drive in bridge for the	£835.00 Master
PEPOO8	PEAR3 MASTER 128 GREEN MONITOR FX80+ PRINTER DISC DRIVE Acorn Master 128 Epson FX80+ 800K twin disc drive in bridge for the High res green monitor	£895.00 Master
PEPOO9	PEAR4 MASTER 128 COLOUR MONITOR FX80+ PRINTER DISC DRIVE Acorn Master 128 Epson FX80+ 800K twin disc drive in bridge for the Medium to high resolution RGB monitor with video output	£1025.00
PEPO10	DISCS DS/DD 5.25 96 TPI	£13.50

PEPO11	DISCS DS/DD 3.5 Double sided Suitable for the Master Compact	E26.00
PEP013	KBL 128 PC CASE Give your BBC the PC look with numeric k	E99.00 eypad
PEPO15	SPANISH OPERATING SYSTEM : Comes with Eprom and new keycaps and manual	
PEP016	FRENCH OPERATING SYSTEM Comes with Eprom and new keycaps and manual	
PEPO17	ARABIC OPERATING SYSTEM Comes with Eprom and new keycaps and manual	£89.00 full
PEPO18	GREEK OPERATING SYSTEM Comes with Eprom and new keycaps and manual	£49.00 full

Call for other combinations for prices and deliveries

PLEASE USE OUR CODES WHEN ORDERING

All prices are exclusive of VAT.

Reinforced hub

Approved
Acorn dealer





Peartree House, No 1 Blackstone Road, Stukeley Meadows Industrial Estate, Huntingdon, Cambs PE 18 6EF. Telephone (0480) 50595

A new upgrade from Peartreegive your BBC the PC look.



If you're tired of having your BBC peripherals strewn over your desk, this neat unit will tidy them into a professional package—it even includes an IBM® look-a-like keyboard and a built-in 80mm fan. It's easy to fit (with full instructions supplied) and the necessary connections are on the back of the case.

The complete package costs

enly £99.00 + carriage and VAT

total price £124.20

▶ PEP013



PLEASE USE OUR CODES WHEN ORDERING

All prices are exclusive of VAT.

Approved Acorn dealer





Peartree House, No 1 Blackstone Road, Stukeley Meadows Industrial Estate, Huntingdon, Cambs PE 18 6EF. Telephone (0480) 50595

Special offer of the month

STAR NL10 DOT MATRIX PRINTER

ONLY £219.00

For a limited period only

DOT MATRIX PRINTER

- * Fast draft printing at 120CPS
- * Excellent Near Letter Quality font at 30CPS
- * Font selection from front panel
- * NLQ Italics
- * Cartridge interfaces available
- * Friction and tractor feeds included
- * Cut sheet feed available
- * Dip switches easily accessible on rear panel
- * Modern streamlined appearance

▶ PRT019

HOW TO ORDER

Simply fill in the order form below, and send it to us with your requirements. Remember all prices exclude VAT and P&P. Postage will be charged as follows:

Items below £10.00 add £1.50, items below £50.00 add £2.50, items below £100.00 add £3.50, items over £100.00 add £9.00. Note: Independent courier for items over £100.00

Government and educational orders are welcome. Orders will whenever possible be despatched on the same day, stock permitting. For telephone orders call (0480) 50595.

	<i>rth</i> nintt
	and ters
20	ar Peartree,
	case rush me your Privilege Card.
10	ame
40	ldress
_	
Te	lephone
	enclose my cheque for £ or please debit my ccess or Visa Card No.
D	ate card expires
	gnature date

The state of the s	E BLOCK LETTERS		
YOUR NAME			
ORDERING	FOR A COMPANY	R INSTITUTION GIVE PURCHASE ORDER NO.	
NAME AND	ADDRESS TO BE DEL	VERED	
REF. NAME _		TELEPHONE	distance of
QUANTITY	STOCK CODE	ITEM	PRICE
ATT	BY MAN		
	DESCRIPT	STATES STATES IN CO. STATES OF THE STATES OF	
i inte	Will Agree 12)	the second of the second	
	43.90	THE SERVICE SHEET SHEET SHEET	
		DELIVERY/POSTAGE	
		TOTAL (EX VAT)	
SIGNATURE	TT A T	VAT @ 15%	
			The state of the state of
PAYME	NT TERMS		PALLT VIEW CONTRACTOR
		OTHER	
	Access	ACCESS OR	
		VISA No.	
		EXPIRY DATE	

BANANA STOCKISTS

BUCKINGHAMSHIRE

WORDMONGERS LTD UNIT 21, EDISON ROAD RABANS LANE AYLESBURY, BUCKS TEL: (0296) 437878 CONTACT: HENRY WEBSTER

CAMBRIDGESHIRE

WISBECH COMPUTER SERVICES LTD 11 HILL STREET WISBECH CAMBRIDGESHIRE PE13 1BA TEL: (0945) 64146 CONTACT: IAN DUFFY

CORNWALL

HELSTON COMPUTER CENTRE COINAGEHALL STREET HELSTON CORNWALL TR 13 8XF TEL: (0326) 563765 CONTACT: MR C. HARMER

CUMBRIA

CUMBRIA SOFTWARE SYSTEMS LTD KNORRENSYKE WALTON BRAMPTON CUMBRIA CAB 2DS TEL: (06977) 3779 CONTACT: DAVE ELDRIDGE

DEVON

T. A. COMPUTER SERVICES
7A HIGH STREET
EXMOUTH
DEVON EX8 1NN
TEL: (0395) 266814
CONTACT: TONY AYLING

DORSET

TIGER SOFTWARE
66 ST. MICHAELS LANE
BRIDPORT
DORSET DT6 3RB
TEL: (0308) 27691
CONTACT: TERRY GILBERT

DURHAM

DESKTOP 11 WEST ST HETT CO. DURHAM DH6 5LS TEL: (0388) 767244/813033 CONTACT: DUNCAN A. ROUTLEY

HAMPSHIRE

TIMATIC SYSTEMS LTD FAREHAM MARKET FAREHAM HAMPSHIRE PO16 1 LB TEL: (0329) 239953 CONTACT: MR YOUNG

HERTFORDSHIRE

MELMARK MICROSYSTEMS WARREN PLACE RAILWAY STREET HERTFORD HERTFORDSHIRE SG14 1BA TEL: (0992) 554469 CONTACT: N. J. TOBIN

KENT

CANTERBURY COMPUTER CENTRE 56-57 PALACE STREET CANTERBURY KENT CT1 2DV TEL: (0227) 462101 CONTACT: DAVID JONES

COMPUTERS PLUS 65 HIGH STREET SITTINGBOURNE KENT ME10 4AW TEL: (0795) 25677 CONTACT: A. FRANCIS

MARLBRO' COMPUTER SERVICES VIA ITS NATIONWIDE ENTHUSINET AGENTS THROUGHOUT THE UK TEL: (04536) 4310 CONTACT: J. S. CHURCHILL GRAVESEND COMPUTER CENTRE 39 THE TERRACE GRAVESEND KENT DA12 2BA TEL: (0474) 323871 CONTACT: LYNNE BAXTER

JUST DISKS
18 CRESCENT WAY
GREEN ST, GREEN
ORPINGTON
KENT BR6 9LS
TEL: (0689) 62103
CONTACT: JOHN TAYLOR/ANGELA DAVIES

KENT MICRO COMPUTERS LTD 55-57 UNION STREET MAIDSTONE KENT ME14 1ED TEL: (0622) 52784 CONTACT: FRANK SMITH

THE VILLAGE HOUSE OF COMPUTERS 87 BECKENHAM LANE SHORTLANDS BROMLEY KENT TEL: 01-460 7122 CONTACT: MR C. V. GEE

LANCASHIRE

CASTLE COMPUTERS LTD 5 FFRANCES PASSAGE LANCASTER LANCASHIRE LA1 1UG TEL: (0524) 61133 CONTACT: DAVE SMITH/GAIL

COMPUTER GAMES SHOP 3 ROYAL OAK BUILDINGS WATERLOO ROAD BLACKPOOL LANCS FY4 2AQ TEL: (0253) 48738 CONTACT: JIM McEVOY

LONDON

ELECTROSOUND 123 PERRYN ROAD ACTON LONDON W3 7LT TEL: 01-740 8666 CONTACT: PHIL WALSH MICRO ANVIKA 220A TOTTENHAM COURT ROAD LONDON W1P 9AF TEL: 01-636 2547 CONTACT: A. GOHIL

WIDA SOFTWARE LTD 2 NICHOLAS GARDENS LONDON W5 5HY TEL: 01-567 6941 CONTACT: TONY WILLIAMS

RENSOFT 215 RIBBLESDALE ROAD STREATHAM LONDON SW16 6QS TEL: 01-677 0569 CONTACT: RICHARD BUTLER

MIDDLESEX

INSTANT COMPUTER SUPPLIES LTD 8 HIGH STREET CRANFORD HOUNSLOW MIDDLESEX TW5 9RG TEL: 01-897 1534 CONTACT: JOHN OR DARREN SIMS

MIDLANDS

MR DISK 11-12 THREE SHIRES OAK ROAD BEARWOOD WARLEY WEST MIDLANDS B67 5BA TEL: 021 420 1360 CONTACT: J. GUEST

NORFOLK

COMPUTER PLUS (KING'S LYNN) 40 NEW CONDUIT STREET KING'S LYNN NORFOLK PE30 1DL TEL: (0553) 774550 CONTACT: D. J. FARROW

OXFORD

OXFORD COMPUTER SUPPLIES P.O. BOX 133 OXFORD OX4 3NB TEL: (0865) 716137 CONTACT: TERRY J. CUMMINGS

SURREY

STATACOM COMPUTERS LTD 20 GROVE ROAD SUTTON SURREY SMI 1BG TEL: 01-661 2266 CONTACT: R. SURI

FARNHAM COMPUTERS 1 SOUTH STREET FARNHAM SURREY GU9 7QU TEL: (0252) 723107 CONTACT: DAVID WOLLEN

SUSSEX

THE DATA STORE
19 STATION ROAD
HAILSHAM
SUSSEX BN27 2BH
TEL: (0323) 846777
CONTACT: MIKE CLAPHAM

CJE MICRO'S 78 BRIGHTON ROAD WORTHING WEST SUSSEX BN11 2EN TEL: (0903) 213361 CONTACT: CHRIS EVANS

INDEPENDENT SOFTWARE PEPABERA FINDON RD FINDON WEST SUSSEX TEL: (0273) 453568 CONTACT: PETER WORLEY

YORKSHIRE

ASHDOWN COMPUTERS
THE STUDIO
BYRAM ARCADE
WESTGATE
HUDDERSFIELD HD1 1ND
TEL: (0484) 510776
CONTACT: STEPHEN FISHER/IAN
DONKIN

WISE OWL SOFTWARE LTD UNIT 37 BRAMPTON CENTRE BRAMPTON ROAD WATH-UPON-DEARNE, 5 YORKS 563 6BB TEL: (0709) 872703 CONTACT: BOB LEES

SCOTLAND

VICS 31/33 SOUTH STREET PERTH PH2 8PD TEL: (0738) 36704 CONTACT: DAVID/BRIAN VICARY

WALES

POSI-TRON COMPUTING 15 CENTRAL PRECINCT LLANELLI DYFED SA 15 1 YF TEL: (0554) 759624 CONTACT: DEREK JONES

N. IRELAND

TC COMPUTING SERVICES
28 KENVARRA PARK
COLERAINE
CO LONDONDERRY
N IRELAND BT52 1RT
TEL: (2025) 53155
CONTACT: MR JOHN A TROTT

NORWAY

CAYMAN POWER VETRLIDS ALM 11 5000 BERGEN NORWAY TEL: (01047) 5317849 HALVARD SKULSTAD

REVERSIBLE MINIDISKS

EXCLUDING VAT, A TEN PACK IS

-ONLY £8.65

TO DEAL IN BANANAS TEL: (042873) 4934 "WHOLESALE"

BANANAS SUIT VIRTUALLY ALL COMPUTERS WITH 51/4" DRIVES. SINGLE OR DOUBLE SIDED, 40 OR 80 TRACK. SINGLE SIDED **DRIVES HAVE** TWICE THE STORAGE AS **BANANAS CAN BE** FLIPPED OVER. **BANANAS** HAVE:-**HUBRINGS-**2 NOTCHES-2 INDEX HOLES-TABS & LABELS. ALL CERTIFIED WITHA LIFETIME WARRANTY.



banana

REVERSIBLE MINIDISKS

EXCLUDING VAT, A TEN PACK IS

ONLY £8.65

GROWN EXCLUSIVELY BY DISKING INTERNATIONAL HINDHEAD, SURREY GU26 6TD

TEL: (042873) 4834

Official Government
plus P & P at £1.09
3-5 boxes, 69p/box
cluding VAT. (Post
with every ten-pack.

All orders despatched

Please rush me boxes of Bananas at £9.95 per box plus P & P at brows are row. Total £11.04 per box inc VAT. P & P is 86p/box for 3-5 boxes, 69p/box for 6-9 boxes. Ten boxes or more are POST FREE.

Also send me ______ B / NANA LIBRARY BOXES at 95p excluding VAT. (Post free with discs).

Free with discs).

Tel No....

Adroce

SYSTEMS

V251

DISC DRIVES

COMPLETE SYSTEMS **FROM VIGLEN**

The following systems come complete with the BBC Master and drives fitted in the Viglen Master Console unit.

Stock Code Description Price inc. VAT V250 Viglen Master System 1 £699.00 This system includes: BBC Master128K in Console unit

Single 400K (760K double density) 40/80 disc drive.

Philips BM7502 Hi Res Green Screen Monitor Viglen Master System 2 £949.00

This system includes: BBC Master 128K in Console unit Dual 800K (1520K double density)

40/80 disc drive

Microvitec standard Res. colour Monitor.

Other systems can be tailor made for your requirements, 31/2" drive can be supplied instead of 51/4" at the same price. Please call. To complete the system you only need to add a printer from any of the range. The current special offer printer that's particularly suited to the packages is the Centronics GLP at £119.95 inc. VAT. Please add £12.00 for insured courier delivery.



Items marked ☆ are special offer products.


All disc drives are supplied with a manual, packed utilities disc and a full 12 Months warranty (2 Year Warranty available) and are ready to plug in and use on a BBC B (fitted with a DFS) B + or Master micro. 40/80 Track drives have a switch which enables operation in either 40 or 80 track mode.

The capacities quoted are given in single density mode; for double density mode (1770 DFS + ADFS as in the Master) the capacities should be approximately doubled.

An integral power supply is not necessary as the disc drives run from the micro's power source however should you require drives with their own power supply, these are also available

If your BBC B micro does not have a DFS fitted then you will also


Acorn ats kit.	
Description	Price inc. VAT
Single 400K Viglen 40/80T Drive	£99.00
Dual 800K Viglen 40/80T Drive	£189.00
Single 100K Viglen 40T Drive	£99.95
Single 100K Viglen 40T Drive + PSU	£119.95
Single 400K Viglen 40/80T Drive	£124.95
Single 400K Viglen 40/80T Drive + PSU	£144.95
Dual 800K Viglen 40/80T Drive	£234.95
Dual 800K Viglen 40/80T Drive + PSU	£279.95
3.5 and 5.25 inch Drives in dual case	£263.95
with Power Supply	
Single 3.5" 400K Drive + PSU	£129.95
Dual 3.5" 800K Drive + PSU	£229.95
1770 or 1.2 DNFS Kit	£49.95
Acorn ADFS Rom	£29.95
£8.00 for insured courier delivery.	
	Description Single 400K Viglen 40/80T Drive Dual 800K Viglen 40/80T Drive Single 100K Viglen 40T Drive Single 100K Viglen 40T Drive + PSU Single 400K Viglen 40/80T Drive + PSU Single 400K Viglen 40/80T Drive + PSU Dual 800K Viglen 40/80T Drive + PSU Dual 800K Viglen 40/80T Drive + PSU 3.5 and 5.25 inch Drives in dual case with Power Supply Single 3.5" 400K Drive + PSU Dual 3.5" 800K Drive + PSU 1770 or 1.2 DNFS Kit

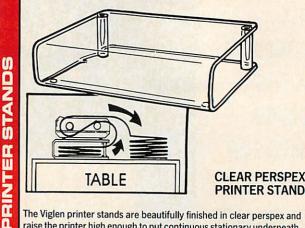

The Viglen printer stands are beautifully finished in clear perspex and raise the printer high enough to put continuous stationary underneath. Stock Code Description Price inc. VAT

V490 80 Column Printer Stand (15" × 13" × 3.5") £19.95 136 Column Printer Stand (23.5" × 13" × 3.5") £29.95

Please add £3 P & P

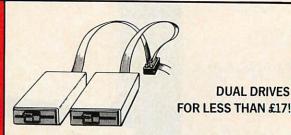

The Viglen Data DUCK (Dualling Up Connector Kit) converts any two single drives to a dual drive instantly. Simply plug the duck into the micro's disc drive socket and plug two single drives (any type and any make) into the duck to obtain a dual drive system accessed as drive 0 (and 2 if double sided) and drive 1 (and 3 if double sided). If neither single drive has its own power supply then you will require a Viglen power DUCK in order to obtain two disc drive power sockets from the micro.

* No soldering simply plugs in.

* No need to take disc drives apart to change links.

Stock Code Description Price inc. VAT V084 Viglen data duck £16.95 V085 Viglen power duck £7.95

Please add £2.50 for P & P.



Price inc. VAT

Dot Matrix F	Printers
Stock Code	Description

	V410	Canon PW1080A/TaxanKP810	£259.00
	V409	Centronics GLP	See Special
			Offer Box
M.	V420	Epson LX86 with tractor feed	£269.00
ř	V421	Epson FX800	£379.00
ii	V422	Epson LQ800 (200 cps)	£559.00
-	Daisywhee	I Letter quality printers	
FZ	V400	Juki 6100	£279.00
4	Ribbons		
7	V462	Canon PW1080A/Taxan KP810 ribbon	£5.95
Ť	V463	Epson MX80/RX80/FX80/FX85 ribbon	£5.95
ц	V464	Centronics GLP ribbon	£3.95
	Printer cab	oles	
	V495	BBC micro/ Master printer cable	£7.95
	V497	Master Compact printer cable	£7.95

Please add £8.00 for insured courier delivery and £1.50 for ribbon.



Your BBC micro can be given the professional PC-look by replacing your existing lid with this smartly styled package which can house two disc drives, the Viglen Rom cartridge system, most internal boards and can support monitors including 14" television sets.

PCU Package includes: Keyboard case, Metal screened main unit, casing including internal fittings, 2 meter coiled cable to connect main unit to keyboard, blanking plates to blank out disc drive apertures, Keyboard label.


Other accessories are also available including units fitted with single

Ш

	Stock Code	Description	Price inc. VAT
	V851	Viglen Professional Console	£49.95
		unit for the BBC micro (PCU)	
	Accessories	for the Professional Console unit	
	V852	2 Meter coil cable on its own	£14.95
	V853	Dual drive data cable for console unit	£9.95
	V854	Dual drive power cable for console unit	£5.95
Í.	V855	Power supply for PCU (capable of	£32.95
ì	A STATE OF THE PARTY OF THE PAR	running two 1/2 height drives)	
l	V856	Fan kit for PCU (only necessary if	£34.95
l		your BBC normally gets extremely hot)	
١	V857	Extension keyboard on its own including	£29.95
		coiled cable.	
	V858	Fitting bracket for 3½" drive	£8.95

Fitting service available from

Please add £6.00 for courier insured delivery.

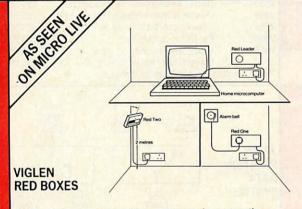

The Red Box system offers all home computer/pc owners the opportunity to run their own home control system. The Red Box starter system provides the first step to an almost endless string of possibilities, from time switching to security. Easy add-on options will give you the high-tec home of the future.

All Red Boxes are protected against interference, either malicious or accidental. Each device is assigned a unique, secret code, known only to the owner. All messages between devices are encoded with a secret key, making them even more secure.

All Red Box systems use powerful micro-processors; they are very easy to use and do not require any programming. Your computer controls the system by simple commands given to Red Leader through the keyboard.

The Red Box starter system comprises:

RED LEADER: a powerful micro Processor Controller Red BASIC

programme language. RED ONE: a computer controlled mains socket into which you

plug the appliance to be controlled. an infa-red sensor which automatically reports any


movement to Red Leader. home control at the touch of your micro.

RED BOX: Stock Code

RED TWO:

£129.95 V0899 Programmable Security Device

Please add £6.00 for insured courier delivery.



COLOUR & MONO

£15.00

All the following monitors are supplied with a cable to fit the BBC micro/ Master and Compact.

Monochron	ne Monitors	
Stock Code	Description	Price inc. VAT
V331	Philips BM7502 Hi Res Green	£85.00
V332	Philips BM7522 Hi Res Amber	£95.00
V333	Taxan KX1201 Hi Res Green	£89.00
Colour Mor	nitors	
V300	Microvitec 1431 Std Res Colour Monitor	£229.00
V301	Microvitec 1451 Med Res Colour Monitor	£279.00
	THE RESIDENCE OF LANDING	00000

V304 Microvitec 1451APL Med Res Colour £299.00 Monitor with PAL £449 00 Microvitec 1441 Hi Res Colour Monitor V302 £349.00 V356 Taxan Super Vision II Taxan Super Vision III £399.00 V357 Please add £8.00 for insured courier delivery.

MEGA BYTES FOR MINI BUCKS	NEW LOW PRICES

Plug in 20 to 112 Megabytes of extra storage with the Viglen Winchester system.

The Viglen Winchester is ready to plug in and use on a BBC Master micro; for a BBC B or B plus you will merely need to fit the Acorn ADFS Rom. The Winchesters are 100% compatible with the Acorn Winchester and Acorn ADFS and will also work with the Acorn Master 512 board with DOS plus.

Drive 1 Winchesters are also available for backup or just more storage and simply plug into the back of the Drive O unit.

The Winchester package consists of: Winchester unit (cased with controller boards, power supply and fan), Master reference Manual part 1, Winchester user guide and Winchester utilities on disc (such as formatter, verifier, ADFS menu and sophisticated backup program allowing you to make fast backups on DFS discs, ADFS discs or Drive 1 Winchester.)

ш	Stock Code	Description	Price inc. VAT		
	Drive 0 Singl	e consideration and a second			
n	V150	VB20 20Meg Viglen Winchester	£699.00		
Ш	V152	VB28 28Meg Viglen Winchester	£759.00		
T	V155	VB40 40Meg Viglen Winchester	£1045.95		
М	V156	VB56 56Meg Viglen Winchester	£1119.95		
Н	Drive 1 Second Drive				
4	V160	VB120 20Meg Drive 1 Winchester	£599.00		
5	V162	VB128 28Meg Drive 1 Winchester	£649.00		
>	V165	VB140 40Meg Drive 1 Winchester	£819.95		
	V167	VB156 56Meg Drive 1 Winchester	£899.95		
	V503	Acorn ADFS Rom and Manual (Only necessary for BBC B or B Plus	£29.95		
	Please add £8	3 for insured courier delivery.	and the second		

STAND

C I

ũ




The Viglen low cost 80 column printer stand is made in high impact ABS plastic colour matched to most printers. It raises the printer high enough to put continuous stationery (up to 1000 sheets) underneath. Stock Code Description Price inc. VAT

Viglen low cost 80 column printer stand $(15" \times 14" \times 5")$ V492

£12.95

Please add £3.00 for postage and packing

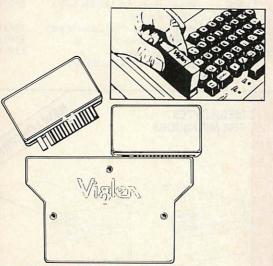

VIGLEN ROM CARTRIDGE SYSTEM

Having fitted the Viglen Rom cartridge system to your BBC, Master or Master COMPACT, you can plug in your Roms/Eproms simply by inserting each one in a Viglen cartridge and plugging in whichever cartridge you want to use. The same Viglen cartridge can be used on all the micros mentioned and there is no need to switch the micro on and off between cartridge changes.

The Viglen cartridge system for the BBC micro consists of the cartridge cable assembly and socket, blanking off plates, 1 cartridge and cartridge storage rack. The cartridge socket when fitted protrudes from the rectangular slot on the left of the keyboard where the cartridges are subsequently inserted. It is simple to fit and requires no soldering.

The Viglen cartridge system for the Master and Master COMPACT simply plugs into your Master cartridge slot (or COMPACT expansion port) and accepts two Viglen cartridges. On the Master you can plug in up to two Viglen cartridge systems thus giving you access to 4 Viglen Cartridges simultaneously. The system comes complete with 2 cartridges and cartridge storage rack. On the Master you can also use Viglen cartridges which have 32 and 64K paged Roms inserted.

Stock Code	Description	Price inc. VA
V560	Viglen Rom cartridge system for BBC	£12.95
V559	Viglen Rom cartridge system for BBC (low profile)	£12.95
V550	Viglen Rom cartridge system for Master	£14.95
V551	Viglen Rom cartridge system for COMPACT	£14.95
V561	Single Viglen cartridge	£1.99
Please add	£2 50 P & P (£00 50 for single cartridge)	



Give your BBC Master micro the professional PC look by replacing your existing lid with this smartly styled package. The system is strong and constructed in high impact ABS colour matched to the BBC Master and it gives your Master a very neat and impressive look.

- * Will support monitors including up to 16" TV.
- ★ Can house two 5 1/4" disc or Winchester drives.
- * Capable of housing 3 1/2" drives.
- * Will accept Acorn cartridges and the Viglen Master Cartridge system.
- * Full internal metal screening.
- * Also available with fitted drives (5 1/4", 3 1/2" or Winchester) or as a complete system including the Master.

The Master console unit system package includes:

Remote keyboard case with cable.

Σ

LS

5

Ш

PONSOL

TUF

MS

Metal screened main unit casing


including internal fittings for 5 1/4" drives.

Two switches which can be used for 40/80 track switching and can be either fitted on the front or rear of unit.

Two blanking plates to blank out any drive aperture that is not used. Full labelling kit.

Fully illustrated fitting instructions.


Stock Code	Description	Price inc. VAT
V861	Viglen Master Console unit	£59.95
Accessories f	or the Master Console unit	
V853	Dual Drive data cable for console unit	£9.95
V854	Dual Drive power cable for console unit	£7.95
V855	Power supply for the console unit	£34.95
V866	Fan Kit for console unit	£34.95
V858	Fitting bracket for 3 1/2" drive	£8.95
	Fitting service available from	£15.00
Please add £	8 for insured courier delivery.	

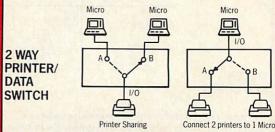

The Viglen 2 Way Printer/Data Switch allows you to connect two printers to one computer or two computers to one printer, and to switch between them. All lines are switched (unlike other models) and hence the switch can be used with a combination of any type of computer and printer (or modem, or terminal, or any other data

All sockets on the parallel switch are centronics 36 way, female type. Serial versions are also available with 25 way "D" type, female S sockets.

* Compac	t size 73/16" × 5" × 2". * Push Button Op	peration.
Stock Code	Description	Price inc. VAT
V2000	PAB2 Parallel 2 Way Printer/Data Switch	£49.95
V2001	SAB2 Serial 2 Way Printer/Data Switch	£59.95
CABLES		
V0493	36 Way Centronics to Centronics cable	£ 9.95
V0494	25 Way D Type Serial to Serial cable	£10.95
V0495	BBC to Centronics Cable	£ 8.00
V0496	BBC to 25 Way D Type Serial Cable	£ 8.95
V0498	IBM PC to Centronics Cable	£14.95
V0499	IBM PC to 25 Ways D Type Serial Cable	£10.95
Please add £2	2.50 for postage and packing.	







Viglen Ltd., Unit 7, Trumpers Way, Hanwell, London. W7 2QA Telephone: 01-843 9903 Telex: 919 304 VIGLEN G Fax: 01-574 5126



Prices correct at time of going to press and offers are subject to availability

HOW TO ORDER

Simply fill in the coupon or write to us with your requirements enclosing a cheque/postal order or your credit card no. for the total amount. Don't forget to add the cost of delivery. Viglen endeavour to despatch all credit card orders within 24 hours.

Viglen has a special education department to process orders and queries from schools, colleges, universities and Local authorities so please ask for our education department when you call. Being one of the major suppliers to

Official orders from education establishments, Government departments and Plc companies accepted.

Credit card holders may order by telephone on our sales hotline 01-843 9903 (8 lines). Orders from overseas should be exclusive of VAT (Please deduct 15% from the total cost).





Dealer and Trade Enquiries Welcome:

Showroom Opening Times

By appointment only

Items marked ☆ are special

o Viglen Ltd.	rumpers Way, Hanwell, London W/ 2QA. 16	el. No. 01-843 9903. Please make cheques and postal orde	ers payable
STOCK CODE DESCRIPTION		QUANTITY TOTAL PRIC	CE
Z-10-10 - 1-00-00-1	erani arang menangkan dan mengga Manggaran dan menangkan dan menggaran		
	euery of Armania barry and subspection and subspections are subspections.	Carriage	
Please find enclosed a cheque/postal of		Total	
prefer to pay be VISA □ * ACCESS □ *			
prefer to pay be VISA ACCESS Tick one please. Card No.	Signature	Expiry date	

computer

The Advanced Plus Four (A.P.4.)

- A FULLY ACORN COMPATIBLE disc I/face for the 'ELK' & Plus 1
- Accepts any standard 5¼" or 3½" disc drive with PSU
 Supplied with 1770 DFS (as supplied on the B+ & Master series) (A.E.D. is still available for Plus 3 users at £24.15 inc.)
 Page stays at &EOO, the same at Tape F.S. NO LOSS of RAM
- Will allow more tape software to be run from disc
- Access compatible BBC disc-based software. No conversion program needed
- Extra sideways ROM socket fitted as standard A self-contained, well finished and fully tested product
- No 'short cuts' in design, finish or components
- ROM s/ware includes format, verify, free space and utils. Achieve greater BBC compatibilty

£69.55 (+VAT)

"I can recommend it to anyone contemplating upgrading to disc".

Electron User, June '86 "The AP4 should be considered the standard interface for the Electron" Acorn User, July '86


AP4 SPECIAL PACKAGE PRICES

AP4 100 = AP4 + 51/4" 40 track S/S including PSU £199.00
AP4 400 = AP4 + 51/4" track switchable D/S including PSU £229.00

These prices include VAT and delivery



Disc drive compatibility at long last ELECTRON USER, JUNE '86

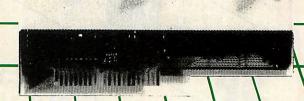

03 16K Sideways Rom Adaptor For Acorn Computers المحكداللالفلا tt mex राह्मान्त्राच्य

غافا لاعلام فا Computer अर्थातिक 1986 ACP Ltd. 6 Ava House; High St. Chobhain, Surrey THE ADVANCED ROM ADAPTOR II

The Advanced ROM Adaptor II

Our versatile cartridge continues to grow in popularity and demand. This ROM/EPROM adaptor is a quality product fully enclosed in an Acorn approved casing, providing full protection for your valuable firmware! A.R.A. 2 not only allows 8K (2764) & 16K (27128) ROMS/EPROMS but also supports 27513 & 27011 devices (when used with the correct software) for which we are currently devoloping new products. Fully compatible with the Master Computer & Electron Plus 1 "The best ROM cartridge is by far the ACP ARA2", A+B Dec 86

Is a program that runs in sideways RAM and provides a large Print Buffer, instead of the resident 63 bytes. Large means over 14K (14700 characters) allowing letters, reports, documents, listings, etc. to be printed while you carry on with naother task. Full control is provided to switch Buffer on/off. Purge Buffer, even changing the effect <ESCAPE> has on the Buffer (essential when using w/procs such as View)

ADVANCE BBC DFS EØØ

Enables B+ or upgraded B users to run 1770 DFS at Eøø when used in 16K sideways RAM

(51/4 DFS) / B+ £19.99

ACORN plus ACP = Plus One

ACP are proud to announce they are now producing the Acorn plus one

Introductory price £49.95 inc

POINTS THE WAY FOR THE ELECTRON USER

AMX MOUSE

Catch an incredible AMX MOUSE! The advanced opto-mechanical device that brings to your ELECTRON facilities once only available on more expensive computers. Now you can use ICONS, WINDOWS, AND POINTERS in your own programs.

AMX PACKAGE Plug the MOUSE into the user port, and the EPROM into your A.P.5. The latter contains fast machine

code routines for creating on-screen windows, icons and pointers. And means that the MOUSE buttons can be programmed for use with commercial software such as Wordwise and View. There are two manuals included, explaining how to operate the MOUSE and the ROM routines, which are available in both basic and machine code programs.

Included in the package are two superb programs:


AMX ART has to be seen to be believed! It's a computer-aided drawing program that's just as good for serious applications - such as the preparation of datailed architectural and engineering drawings or teachers' worksheets - as it is for having lots of family fun! And if you're artistically inclined, you'll be astonished at the quality of work you can produce and save. It makes full use of on-screen menus, pull-down menus and icons: the ideal, easy way for novices to learn and gain in confidence.

ICON DESIGNER is an invaluable program for creating and storing icons for use in your OWN programs.

The ACP/AMX mouse package may be used on an ELECTRON fitted with a PLUS I & AP5. The 'ART' software is supplied on cassette but can be transferred to DISC (DFS not ADFS)

£69.95 - MOUSE PACKAGE AND AP5 £125.00

Advanced Computer Products Ltd., 6 Ava House, High Street, Chobham, Surrey. GU24 8LZ Tel: 0276 76545



NEW PRODUCTS

ADVANCED PRINT BUFFER is a program that runs in sideways RAM and provides a large printer buffer, instead of the resident 63 bytes. Large means over 14K (14 700 characters) allowing letters, reports, documents, listings etc. to be printed while you carry on with another task. Full control is provided to switch buffer on/off, purge buffer, even changing the effect <ESCAPE> has on the buffer (essential when using w/procs such as View) (5½ A/DFS)/B/M/C \$5.95 /BIMIC 25.95
ADVANCED ELITE FS allows Master users to run their BBC Elite program disk on the Master or Master Compact (5¼ ADFS) /M/C 25.95
ADVANCED BBC DFS E00 enables B+ or upgraded B users to run 1770 DFS at (# E00 when used in 16K sideways RAM (5¼ DFS) /B+ £19.99 ADVANCED DISC TOOLKIT (01) /M/B/E/C £34.50 Any Acorn user including Master, BBC B+, Electron, DFS, 1770 DFS, ADFS, 2nd. & co-processors A.C.P.'s BEST SELLING product containing over 30 commands inc.:- powerful memory & disc editor, search memory/disc/ basic, catalogue/unplug ROMS, load/run

ADVANCED ROM ADAPTOR 2 £14.95 (03) /M/E+1/

An Acorn approved cartridge containing a card with special 'zero' profile sockets that allow you to fit compatible 8K or 16K EPROMS/ROMS. The cartridge is fully enclosed providing complete protection for your ROMS. Simple to use -no switchingcomplies fully to the Acorn (sideways) Rom Filing System. A.R.A.2 contains 2 sockets... A single adaptor is also available.... A.R.A.1 (02)/E/ £10.35 "The best ROM car-

tridge is by far the ACP ARA 2" ... A+B Dec 86

ADVANCED DISC INVESTIGATOR (06) /M/B/E/C

A very powerful Disc utility for standard & A very powerful Disc utility for standard & non-standard discs. Backup most protected discs, edit any type of non-standard disc, check & repair faulty tracks, create new disc formats, copy 40track discs to 80track discs,

verify two non-standard discs.

("ADI features an extremely comprehensive sector editor, and one of the finest I've seen"
...Tubelink on Prestel)

(supplied on 16K EPROM + manual)

€66.70

ADVANCED SIDEWAYS RAM

The following ACP products: Advanced Disc Toolkit Advanced Disc Investigator

Advanced ROM Manager Advanced 1770 DFS are all compact compatible

£29 90 (04) /E+1/

produced by Acheing

A highly versatile but simple to use s/w RAM cartridge that is automatically write protected on loading. Contains 16K RAM but can be switched (externally) to 2 X 8K RAM. Supplied with instructions & full software support (on cassette) to save ROM images to disc/tape, load RAM from file, Advanced Print Buffer & MakeRom a utility to merge several files from disc to be run from the ROM FS.

(S/Ware on disc : please add . £1 51/4 DFS .. £2 31/2 ADFS)

(07)/M/B/E/C

ADVANCED ROM MANAGER

A friendly utility for ROM & sideways RAM.

Examine ROM/RAMs, load files into RAM,

move memory to/from SWays ROM/RAM, catalogue/kill ROMS, offer commands to specific ROMS, save ROMs to disc/tape,

AUTOROM a file (inc. BASIC) to run from

SWays ROM/RAM, execute specific

machine code subroutine in a ROM, generate

a ROM's checksum & CRC. "Represents

amazing value for money. Go out and buy this real bargain"... Dec 86 Database Pub-

lications. (supplied on EPROM + manual)

ADVANCED ELECTRON DFS £24.15 (05) /E/

... gain BBC Electron & Plus 3 users compatibility by adding the Advanced Electron DFS (1770 DFS) this is the same disc filing system supplied with the BBC B+. Now you can produce and access (compatible) BBC disc based software. A.C.P. also supplies 51/4" disc drives to add to your Plus 3 (inc. 2nd. drive adaptor). "ACP has produced another superb ROM for the Electron".. Electron User Feb '86

programs below page, automatic menu, file

transfer (inc. locked cassette files), ADFS utils

"A top-class toolkit - I have no hesitation in recommending it ... Acorn User Nov. 86) (16K EPROM & FULL MANUAL)

etc. etc. ("it's superb" ... Database Pubs.

(supplied on 16K EPROM + DFS MANUAL)

ADVANCED PLUS 5

A triple interface cartridge providing.

1) a TUBE i/face allowing a second processor to be connected, increasing BOTH speed &

memory (PAGE &8øø HIMEM &8øøø in all

2) a 1 MHz BUS for control applications &

3) the USER PORT for mouse and graphic

Also contains 2/3 ROM sockets and on board

operating software for 2nd processor.

(09)/E + 1/

modes)

prommers

devices

ADVANCED 1770 DFS 3 versions ADM/C(11) - ADB(12)

£34.50 ADE (13) ACP have totally re-written the Acorn 1770 DFS, enhancing existing features & adding new ones. The result is probably the fastest & most powerful disc filing system your computer could have. With the ability to operate in double density occupying both sides of a disc (640K). Automatic file relocation, improved file handling, 62 file catalogue and Sways RAM can be used as a

(16K EPROM + comprehensive manual)

ADVANCED PLUS 4 £79.98 (08) /E + 1/
"DISC DRIVE COMPATIBILITY AT LONG LAST

"DISC DRIVE COMPATIBILITY AT LONG LAST"... (Electron User June '86) this sums up AP4 & ACP's approach to producing products. AP4 is a fully ACORN compatible disc I/face & will accept any standard drive inc. PSU, runs 1770 DFS (as fitted in the B+ & Master), keeps page & Eøø, utils in ROM & provides a spare rom socket. "ACP's PLUS 4 comes out on top. I can recommend it to anyone..." (E.U. June '86)
...AP4 should be considered the standard inter-

one... (E.U. June 86)
...AP4 should be considered the standard interface for the Electron (AU July 86)
...AP4 100
...E199.00 (inc VAT & Securicor delivery)
...AP4 400
...E299.00 (inc VAT & Sucuricor delivery)

ADVANCED ELECTRON DFS EØØ (14) /E+ASR/ £19.99

An alternative to our AED(05) for Plus 3 and ASR users. This optional alternative DFS is designed for use in Sideways RAM (ASR) and allows the user to operate a disc filing system &Eøø when using the Plus 3 (in ADFS page

would normally be &1 Døø). The DFS is simply loaded using the software supplied with the ASR from disc. (optional upgrade for existing AED users £9.50 on return of original EPROM) (3½" ADFS disc + manual)

OTHER PRODUCTS & SPECIAL OFFERS

fast RAM DISC

31/2" discs in 1/box (120) /M/B/E/ (101) /E+1/ £ 12.95 VIEW cartridge £12.99 51/4" discs ds/dd" (121) /M/B/E/ (102) /E+1/£ 12.95 Vsheet (122) /M/B/E/ £ 8.99 51/4 discs ss/sd (119) /E+1/ £ 19.00 **VIEW & SHEET** (103) /E+1/£ 9.99 (104) /E/ £ 3.95 (please call for price) 31/2" disc drives LISP cartridge (please call for price) (104) /E/ £ 51/4" disc drives E/Adv User Guide 7.95 (106) /E/ £ 39.95 2nd Drive Adaptor (130) /E+3/ LOGO cartridge £ 2.95 (124) 31/2" library box 10 16K EPROMS (107) /E/ £ 39.95 PASCAL cartridge £ 3.75 (131)(118) /B/ £ 49.00 VIEW pack BBC (140) /E+1/ £199.00 (141) /E+1/ £229.00 (117) /M/B/(e) £57.95 VIEWSTORE VIEWPLOT (142) /M/B £26.95 AP4 400 (141) /E+1/ £229.00 AP5 + MOUSE Pckage (143) /E+1/ £125.00

Equipment codes /M/= Master /B/=BBC /E/=Electron /E+1/=Electron+Plus 1 /C/=Compact

Please send order to: Advanced Computer Products Ltd. 6 Ava House, High Street, CHOBHAM, Surrey, England GU24 8LZ. Tel. 0276 76545 (mail order only)

All our prices include UK delivery & VAT





(in event of any query please include your tel. no.)

TEL. CREDIT CARD No.

NAME

I enclose payment for £..... Exp date(A23)

TOTAL

ACORNSOFT BBC & ELECTRON **MICROPOWER** ALSO NEW 31/2" COMPACT

For Electron only

WORDPROCESSING CARTRIDGE

Word Sequence

Snapper

Talk Back

Workshop

Boxe

SPREAD SHEET CARTRIDGE

BUSINESS

£29.95 £12.95

 OR ONLY **£19** *FOR A LIMITED PERIOD ONLY

£6.99

£6.99

£6.99

EC.08

ROM boxplus and Acorn's Plus One

Work with Sloggers

ELECTRON GAMES CARTRIDGES Sentence Sequence

Compatible with sloggers ROM box plus and Acorns plus one

3 GAMES FOR ONLY £19.95

CARTRIDGE ONE

- (a) Stock-Car
- (b) Cybertron Mission
- (c) Bumblebee

CARTRIDGE TWO

- (a) Killer Gorilla
- (b) The Mine
- (c) Positron

CARTRIDGE THREE

- (a) Felix In The Factory
- (b) Electron Invaders
- (c) Chess

PRIMARY EDUCATION HOME INTEREST £8:99

Watch Your Weight Theatre Quiz Desk Diary **Business Games** Graphs and Charts

£6.99 £6-99 £6.99 £6.99 £6,99

Electron Invaders Felix & Fruit Monsters Frenzy Chess Danger UXB

SELECT ANY FIVE FOR ONLY E7.95 • ELECTRON ONLY

E14.95 Linkword German Biology Linkword Spanish £14.95 English Linkword Italian £14.95 IDO £12.65 Maths 'O' Level I £12.65 **BBC & ELECTRON**

SPECIALS Maths 'O' Level II £12.65 £12.65 F12-85

Me & My Micro (books & cassette) ANY TWO FOR £3.95

ELECTRON LANGUAGES £9.95 £2.95

MICROPOWER GAMES

Lisp Cassette **Turtle Graphics** Cassette

£9,95 £2.95

£7.95

£7.85

£7.05

£7.95

£7.95

£3.99

FIREBIRD (BBC ONLY)

£3.95 £1.25 £3.99 £1.25 Microcosm Fatman Sam Star Drifter £3.99 £1.25

GAMES

Magic Sword Dennis Through The Looking Glass Classic Adventures Classic Adventures
Giroscope
Bandits at 3 O'Clock
Escape from Moon Base Alpha
Ghouls
Stock Carilla

Brian Jacks £6.95 Geoff Capes Guiz Bournes Castle Rubble Trouble Swoop Croaker Bumble Bee Positron BBC & ELECTRON ANY FIVE FOR ONLY £7.95 ELECTRON ONLY

Hampstead

£6.05 £6.05

ELECTRON ONLY Cybertron Mission £7.95 Galactic Commander £7.95 Moonraider £7.95 Position £7.95 Jet Power Jack £7.95

NEW!! MICROPOWER MAGIC DOMPIL

IN THE CHARTS NOW 10 ORIGINAL HITS - FANTASTIC VALUE £7.95

BBC B/B + /MASTER CASSETTE BBC B/B + /MASTER 80T DISC BBC B/B + /MASTER 40T DISC **BBC COMPACT DISC**

£7.95 £7.95 £9.95 **ELECTRON CASSETTE** £7.95

TEN CLASSIC HITS

INCLUDING STOCK CAR

• KILLER GORILLA **DUNE RIDER**

● INCLUDES: STOCK CAR, BANDITS AT 3 O'CLOCK & CYBERTRON MISSION

BBC ROM & CASSETTE BBC MASTER/B + DISC NEW
BBC COMPACT DISC £18.95 £8.95 BBC COMPACT DISC NEW

CASTLE QUEST MODEL B

BBC B DISC BBC B CASSETTE £14.95 £7.95 £12.95 £6.95

ECTRO ROM CARTRIDGES

Logo Cartridge £59.95 £29.95 £59.95 ISO Pascal Cartridge £29.95 LISP Cartridge £29.95 £9.95 Starship Command £2.95 £14.95 £14.95 £2.95 Hopper £19.95 £17.95 Elkman ROM

Electron Joystick Interface

& Software £14.95 plus 3 Games Disk £19.95 £9.95 Magic Mushroom £2.95 £12.95 Electron Advanced User Guide £9.95 £2.95





SOFTWARE BARGAINS

(a division of the micropower group) Dept 1AA, 8/8A Regent St., Chapel Allerton, Leeds LS7 4PE Tel (0532) 687789/687735 PLEASE ADD 95p P&P

- FITERS

Write to Letters, Acorn User, 141-143 Drury Lane, London WC2B 5TF

SURVEYING THE SCENE

Sir, I read the letter referring to software for surveyors with interest. If the company concerned would care to contact me, I may well be able to help out. Please write to:

13 Carnoustie, Home Farm, Bracknell, Berks.

If they could provide me with the calculations they have to make, I would be prepared to attempt to write the required software in either Basic or 6502 machine code.

On another note, Mike Rawlings' listing for Filing Sideways (Sept '86) was found to be very useful for a piece of scientific equipment colleagues and I are developing. The equipment will use a stand alone 6502 micro-processor and the problem was to allow software to auto-boot on switch- on

I have written the main controller in Basic with some machine code sections for speed. Ideally, the whole lot should be written in machine code, set up as a language in ROM which could then be selected by default. However, since there is no problem (yet!) with 'no room' and speed is not essential in the Basic parts, it was decided not to re-write it.

Mike Rawlins' listing allows all the files to be loaded into sideways RAM. Auto-booting can be accomplished by adding the lines above.

Once the software is proved to auto-boot by pressing

CTRL-Break, it may be assumed to function in ROM from so it may be 'blown' into an EPROM. On switch-on, all

2541 LDY #0
2542 .again TYA:PHA:LDA
auto+p%,Y:BEG return
2543 TAY:LDA #&BA:LDX #
0:JSR &FFF4:PLA:TAY:INY:
JMP again+p%
2544 .auto
2545]
2546 PROCequs ("*ROM"):
PROCequb (13):PROCequb
(13)
2547 PROCequb (0)
2548 IOPT pass
2549 .return PLA

the ROMs are initialised and the inserted code is placed into the input buffer. Once Basic is selected, usually by default, the command *ROM activates the ROM filing system and CH. "BOOT" chains the file BOOT which should have been placed in the EPROM along with any other files.

I have to say that the idea came from David Acton's Quadline program (Acorn User Jan '85) listing 3.

J R Leighton Berkshire

BEAM CALCULATIONS

Sir, I have written a beam calculation program which needed the extra memory of the 6502 second processor. What a coincidence, therefore, to read two letters in your December issue, the first entitled 'Second Thoughts' and the second, 'Software for Surveyors'.

The program which I was developing reached the point of producing shear force and

bending moment diagrams from sets of calculations; these agreed well with manually performed calculations but the frustration of not being able to dump them to a printer resulted in an uncompleted program. I still have not been able to discover the means to produce the dump.

On the subject of software for surveyors, I have a very impressive printout, which runs to 12 sheets, on the analysis of a roof truss. I do not know if it runs on the BBC micro, indeed, if it is in Basic but for what it is worth, its name is CADS3analyse (c) CADS 1983. After inputting the relevant details, a mass of tables are produced, including forces and moments, reactions, and so on. And, finally, a diagram of the truss over which is superimposed the truss after loading, showing the deflections.

Bending moments of various members are also shown diagramatically on other sheets. Altogether, it gives a superbly clear picture of the complete framework under loading.

If I could have produced a program which only approached the quality of this, I should have been more than satisfied. Perhaps the secret of the dump from the screen across the 6502 will eventually come to light; my program will then no doubt be resurrected and completed.

R J Lindsell Essex

Beamscan is a piece of software for calculating the deflections of steel and timber

beams. It costs £50 or £60 (with graphics) from Beamscan, 20 Vaughan Ave, Hendon, London NW4 4HU. Please state BBC or Master and disc format (40 or 80-track, Acorn DFS).

Also, Acorn has a catalogue of technical software. It costs £2.50 from Vector Services, Unit 21, Ideal Complex, Victoria Rd, Wellingborough, Northants.

The answer to your prayer for dumping screens is Acorn User's User Dump which comes in a ROM chip and costs £19.95 inclusive. It will work with any Epson-compatible printer (except the MX80).

If you are interested turn to page 130 for details.

HELP PLEASE

Sir, Would it be possible to use the pages of *Acorn User* to make an appeal?


We have a totally blind student who started his GCSE courses this September, and most of our software and hardware is unsuitable for him.

What we would like is if you could appeal for anyone who would be willing to write programs to help us. This would vary from the simple and short to the long and complex. In other words something for everyone. Could you ask people to contact me at: Kingsdale Comprehensive School, Alleyn Park, London SE21 8SQ.

Many thanks.

Graham Luckhurst London SE21

Linnet - Designed to a philosophy

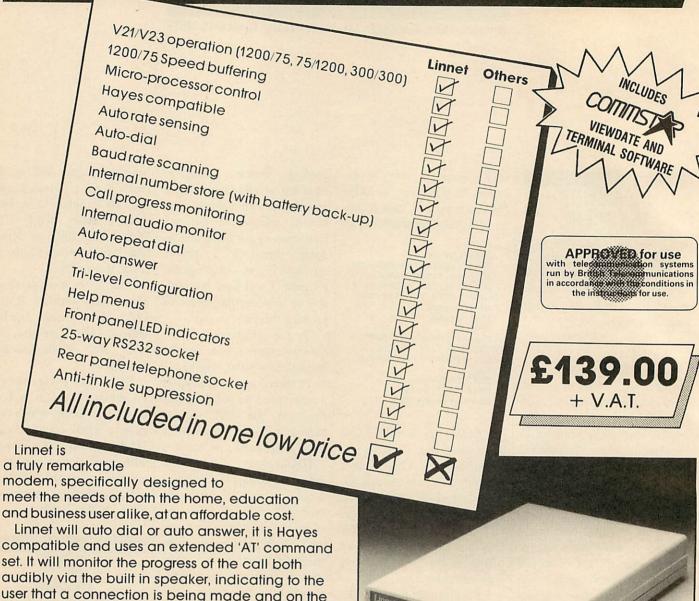

compatible and uses an extended 'AT' command set. It will monitor the progress of the call both audibly via the built in speaker, indicating to the user that a connection is being made and on the screen with simple messages such as line busy etc. For those computers not able to handle split baud rates, Linnet will speed buffer from a terminal speed of 1200 baud to 1200/75, and will automatically detect the baudrate of the system being accessed.

Linnet features battery back-up and has a 32 number store facility. It comes with 'AT' commands and 'S' registers pre set but these can be reconfigured to suit the needs of the user, and retained in memory.

Three built-in help menus make Linnet simple to use and its range of features make it one of the most advanced modems available.

On some modems around today, many of the above features are charged for in 'addition' to the basic price. Linnet provides these in an inclusive package which includes a detailed user guide. In short Linnet provides a simple cost effective solution to your communications needs.

Lymet – because not all modems are created equal.

For further information on Linnet or on the complete range of Pace Modems (up to V22 bis intelligent operation) contact your local dealer.



BRINGING TOMORROW A LITTLE CLOSER!

PACE Micro Technology

Allerton Road, Bradford, West Yorkshire BD15 7AG. Tel. 0274 488211 Telex No. 51338 PACE G Prestel Mailbox No. 274 729306 Telecom Gold Mailbox No. 79:PCE001 Int. Tel. No. +44274488211

LETTERS

MORE SURVEYING INFO

Sir, I write in replay to Peter Thatcher's letter (AU, December 1986) enquiring after software and surveyors. Although I am a 'converted' reader from – dare I say it – Micro User, I noticed an article in the September 1986 edition of MU that might be of assistance to Mr Thatcher. The article in question is entitled 'Surveying the scene with the BBC micro', and I have no doubt that this particular subject will make interesting reading for him.

May I take this opportunity of congratulating your editorial staff on the excellent content of AU – keep it up!

Steve Chadderton Lancashire

ADVENTUROUS UPGRADE

Sir, I've had my model B micro for two years now, and I have tried many times writing an adventure game, but can't manage it. Now I wonder if *Acorn User* might produce a series about writing adventures on the BBC micro.

I'm now going to upgrade to DFS but there are so many to choose between! Which one do you think is best for me? I'm 14 years old and I'm working with many small programs, so I need a DFS that can take more than 31 files. Can you give me some help?

Robert Schmidf Norway


Writing adventures is a difficult subject to cover in a magazine, but Joe Telford wrote an Acorn User Adventure in the July 1985 issue. There are several books on the subject, some of which have been reviewed in past issues.

As for the DFS, if more than 31 files per disc is your main need, then Watford Electronics' DFS will do the job, and is very similar in use to Acorn's (make sure you get the latest version for maximum software compatibility).

The July 1985 and 1986 back issues carried special sections on upgrading to disc. Copies of *Acorn User* are available using the order form on page 136.

VIEW LINE COUNTS

Sir, View must be one of the most widely used word-processors — an efficient and easy to use WYSIWYG. However, printing is restricted to standard format. So one of the minor mysteries is why Acorn did not provide a suitable and



necessary line counter. Adjusting text to conveniently fit the page is a recurring pain in the neck. Without this information one can end up with too many or too few lines for a satisfactory page presentation. The only way seems to be a visual count, including the headers and footers etc. The line length can then easily be adjusted to fit the page. The number of words is almost irrelevant.

It must be admitted, though, that the use of *Fontwise* type-faces and micro-spacing can upset calculations of both line

length and line count.

One can live with the multitude of essential codes etc, but does someone know how to quickly and effectively arrive at the number of lines – a facility so thoughtfully provided by some of the competition? Perhaps I am a unique operator as I have seen no comment relating to this deficiency.

Maurice Gordon-Edgley Portugal

Z80 AND THE MASTER

Sir, In the pre-launch publicity material on the Master, one section outlined the expansion potential. This, of course, speaks for itself. However I was interested in the point regarding the connection of a Z80 second processor. To date, I haven't seen anything written on this matter and would be interested in your comments/advice on the following points:

- 1. How should the Z80 system be set up in the Master, where should the DFS/NFS ROM be installed?
- 2. Are there any advantages in using the Z80 second processor instead of the Turbo board (65C102 co-processor)?
- 3. Can the second processor and co-processor be used together?

Looking forward to your response in the magazine.

Joseph McLaughlin

A Z80 second processor can be used with the Master 128 simply plug it into the Tube and switch on.

The Z80 and Turbo board are two totally different items of hardware. Why do you want a second processor? If it is purely for extra memory and speed to run your programs/languages on then the choice is the Turbo board.

The Z80 is now somewhat outdated – there are only two reasons someone should consider purchasing it; first you wish to learn how to program in Z80 machine code – an expensive way to learn (a Spectrum is much cheaper!). Second, you wish to run the software which comes bundled with it ie, Memoplan, Cobol or other widely-used CP/M software (DBase II, Wordstar etc.)

A second and co-processor can be used together.

UNDERSTATED SLICK!

Sir, Having just read Simon Williams review of our *Slick!* utility disc in your January issue, I should like to point out two inaccuracies in an otherwise excellent article.

Simon states that *Slick!* includes a complete sequential filing system. The whole point of the system is that it is an *indexed* sequential system, allowing both direct and sequential access to records by key, a feature not otherwise, so far as we are aware, available on the BBC micro without addition of a ROM to all the machines using the files.

Second, Simon seems to have missed the point of *DCOPY (and *STXFR) in that it not only allows you to preselect the files for copying, but actually buffers them so that they can (with editing of the filenames if required) be transferred to any side of any disc, thus solving a lot of the problems inherent in single disc operation. I know from my own experience how frustrating the limitations can be, and wrote the program in the first place in order to preserve my own sanity!

Barry E James
BJ Computing
Sheffield

PAEAN SYSTEMS

For the BBC B, B+ & Master 128 Microcomputers

ELDESIGN IIe

FIRST PROPERTY.	
Printed & the Philips & the	
ton a light or light or	-1.25

Anyone seriously engaged in electronics design needs specific filters sooner or later. ELDESIGN II designs analog active filters in the range Order 0 to 8.
*No calculus *No tables

Extensive graphic information provided


*Sensitivity performance easily evaluated *Highly self-explanatory

The software comprises Lowpass, Highpass, Bandpass and Bandreject filters. For each filter the five 'classical' approximations are displayed viz. Bessel-curve, Butterworth-curve, Chebychevcurve, Inverse Chebychev-curve and Cauer-curve

For the filter stages the user may, in most cases, choose from Multiple Feedback, Sallen-Key and Anthoniou circuits. The software Multiple Feedback, Sallen-Key and Anthoniou circuits. The software provides complete graphical representations of Linear and Logarithmic Gain and Phase graphs, Separate Stage graphs and freely selectable coordinates. Leaflet available on request. Demo disc £5.00 credited against purchase. Screendump routine written for the Star Gemini-10X matrix printer. The software contains a program to adapt the routine for use with other printers. Back-up disc supplied. Suitable for a single sided disc drive.

Price £65.00 fully inclusive.

GX DESIGN PLUS An all-purpose draughting system



Driven by an analogue joystick, tracker ball or from the keyboard GX Design PLUS offers a competitively priced entry to a high resolution design applications

*78 icons can be designed by the user on a 27x27 matrix and used as brushes or images and rotated through 90 degrees.
*Any part of the screen can be enlarged, reduced, copied,

moved, reflected or isometrically altered.

*64 patterns for infill or background.

*Definition can be enhanced by the erasure of the individual

pixels.
*2D images can be transformed to 3D using the isometric

*Mode 0 text can be enlarged to any size.

*Accurate measurements available using the x & y coordinates

and a definable grid.

*Display is black on white or the inverse allowing easy hidden line removal for solid or see-through colours.

*7 selectable screen colours.

*Built in Epson screen dump allows any parts of or any number of screens to be successively printed out without breaks. Other dump routine may be used.

Suitable for a single sided disc drive.

Price only £24.95 fully inclusive.

MICRO PERT



This program uses the PERT principle to organise projects (such as Inis program uses the PEHI principle to organise projects (such as personal, corporate, educational, training projects etc.) in which numerous separate tasks are to be performed with minimum labour requirements at the lowest cost in the shortest time. It gives rapid estimates of costs and timescales, assessment of cashflow requirements, efficient allocation of labour resources and a 'What if' facility to gauge the effect of varying circumstances. The software can handle up to 64 tasks and 26 labour resources over 104 time units making it powerful enough to cover most applications. units making it powerful enough to cover most applications. It contains two demonstration examples: a simple motor car service and a short printed circuit board development project. Each task is given a description, duration and cost. Where one task is dependent on others finishing, this is specified and taken into account by the software. The theory of Critical Path Analysis is applied to create a Bar Chart giving the overall duration of the project, highlighting tasks which are critical to the completion date and showing those where a degree of time float is available. Daisywheel and matrix printer outputs in serial or parallel are provided. Suitable for a single sided disc drive.

Price £24.95 full inclusive



FLIGHT PLAN II

A complete light and executive aircraft flight planning system for accurate navigation and Weight & Balance calculations. The printed output for each leg consists of: Ident/Freq., Safe & Cruise Altitudes, Wind Speed/Bearing, TAS, G/Speed, True Track, Mag. Var., Mag. Trac, Drift, Mag. Heading, Distance, Time, ETA. Total flight distance, time and fuel requirements are provided together with return trip and a note pad for in-flight use. The software accepts the following maxima: 20 Waypoints per flight, windspeed to 150 knots, altitude to 60,000 feet, speed to 700 knots, fuel to 200 gallons or lbs equivalent per hour. equivalent per hour.

A Weight & Balance envelope can be configured for any individual aircraft, and can be applied to any flight to produce take off & landing weights.

A data disc is supplied containing about 300 Waypoints and Beacons in the UK and these can easily be modified or added to without limit. Please specify 40 or 80 track discs and whether single

Price £35 fully inclusive.

TO ORDER Please send cheques/POs payable to PAEAN Systems and specify 40 or 80 track disc and the model of your BBC micro. Orders are normally despatched by return of post at 1st class rates.

AFTER SALES We provide an efficient help and advisory service to our customers.

OTHER TITLES Please ask for our catalouge.

PROGRAMMERS We are always interested to publish original software for the BBC models B, B+, Master 128 and 512 on specialist subjects.





PAEAN systems

Little Bealings, Woodbridge, Suffolk IP13 6LT. Telephone: (0473) 623757

PLUS 3 COMPATABILITY

Sir, I thought I'd let you know that I've transfered George Hill's program (June '85) for the printer driver for use with the View wordprocessor onto my Plus 3 disc system and it works very well with my Electron and Brother M1009 printer.

I used the codes given in figure 1 (output from PROCshow driver) without alteration and they produce the effect stated. Thus the Brother printer must be similar to the Epson FX80. I am most grateful for your help.

Dr F W Wilburn Southport

SEEING STARS

Sir, With reference to Heather Smith's enquiry about Astrological Software (Letters, December 1986) and F Deravi's reply (Letters, February 1987) I would like to add that as well as Astrocalc, who produce an expensive but comprehensive range of astrological programs for the BBC micro, I know of two other sources, which, though not in the same league, are worth considering.

The first is by a company called Signsolve:

5 Brambleside, Stafford, ST17 4QW.

Tel: (0785) 662875.

They need birth data and the planetary information from an Ephemeris to be entered. The program then performs all the tedious calculations and presents the information in tabular and chart form, with the option of a printout. Price approximately £7. The other is by:

M Magee, 18 Grafton Road, Harrow, HA1 4QT.

Supplied either on cassette or disc, this requires only birth data input. The information is presented in tabular form only, with the option of a printout. Price £11.50 for 40-track disc and £9.50 for cassette.

For anyone interested in writing their own programs then I can heartily recommend The Manual Of Computer Programming For Astrologers by Michael Erlewine, obtainable from:

Matrix Software, 315 Marion Avenue, Big Rapids, Michigan, 49307, USA.

Tel: 0101 616 7962483.

I would be happy to hear from anyone interested in the subject (6 Mill Lane, Deepcar, Sheffield S30 5RN).

Incidentally, I am a regular reader of AU and I must say how much I enjoy reading it.

> Steve Bass Sheffield

FRENCH ACCENTS

Sir, Living in France and having a BBC B with the View wordprocessor, I was confronted with the problem of using View to write letters/articles in French using French characters. My first solution was to set my printer (Epson LX80) to French characters and then define them on the keyboard using VDU 23 and *FX 20,6 and using the respective keys for the various accents. The printer however has, in its character set, all the accents over the letters except circumflexes. It has a circumflex character without a letter underneath it.

At first I tried to solve this problem by a routine which intercepted the print vector and, if the character being printed was an a, to send a backspace to the printer before the next character. This worked until I wanted to use a printer driver which of course also intercepts the print

vector so my routine was useless. The solution I have now only works with printer driver generators which allows you to define the precise codes for each highlight eg, George Hill's View printer driver generator (AU June '85).

Define one of the codes (I use 140) as a circumflex accent followed by VDU 8 (CTRL-H) which does a backspace. When writing I use the stored command HT 2 140 and when I want to type a circumflex accent I type Shift-f5 - Highlight-2 followed by the letter to be For example accented. (Highlight-2)e would print ê.

I hope this is of help to other readers.

> Michael Brown Paris

bly language routines for operations such as addition, multiplication, keyboard scanning etc. If you become hooked on hacking, you could edit the Oric code and produce your own amended version of the Oric ROM.

Three useful books are the Beyond Basic and Advanced User Guide for the BBC micro and the Oric Advanced User Guide by Leycester Whenwell (Adder Press).

Armed with these books, many weeks of educational enjoyment are ahead of you.

This is more constructive than condemning the Oric to a young child's games machine, an insult to both child and machine!

Happy hacking!

Peter M Keen Derby

ORIC HACKING

Sir, Your reply to R Wall (AU January 1987) contained a fundamental error concerning the Oric Atmos.

The Oric, like the Acorn range of microcomputers, is based on the 6502 microprocessor and not the Z80 as stated. This inherent similarity beween the two machines mentioned opens up an interesting and potentially rewarding pastime, 'Oric Hacking'.

By carefully removing the operating system ROM from the socket on the Oric's circuit board, and installing it as a sideways ROM in a BBC micro, Master or Electron, you can read the ROM's contents.

I have found the superb ACP Advanced ROM Manager is ideal for this task, although Beebug's Exmon program will also work satisfactorily.

If the contents of the Oric ROM are compared with the Acorn operating system and Basic interpreter, you can learn how to (and not to) write assem-

ROMS TO EPROMS

Sir, Over the years I have purchased some ROMs and will shortly be making EPROMs with my new EPROM programmer.

As I have no ROM sockets in the BBC micro left, I shall need to purchase a sideways ROM board soon.

I have noticed that with someboards, you can only insert EPROMs into one socket and I would like to be able to use about eight or nine at a time. Could you please advise me on which board I should purchase?

Congratulations on superb magazine, I enjoy it and find it very interesting.

Graeme McLellan Edinburgh

There is no functional difference between a ROM chip and EPROM therefore any ROM expansion board will meet your needs.

I recommend that you consult Chris Drage's ROM board roundup published in the May 1986 issue of AU.

MASTER THE COMPACT COMPACT COMPANION

The COMPACT COMPANION INTERFACE provides you with most of the expansion features of the BBC Master 128 but with the price and covenience advantages of the BBC Master Compact.

The interface takes two minutes to fit and just adds 3/4 ins. to the length of the keyboard. Features are:

★ Full A to D port ★ User port ★ One/2 MHz Bus ★ The Acorn 1770 DFS in Rom

All ports are standard Master 128 fitting

Software selectable options allow you to ENABLE/DISABLE:

★ User port interrupts ★ Analogue/Joystick processing
 ★ Software/Hardware ★ 2 MHz Bus

Also usual power-up option for DFS/ADFS Special discounts available for education. PRICE £39.95 inc. VAT P&P 60p

INTEGRATED SOFTWARE

For serious applications on BBC Computers DISC MACHINES ONLY



SCRIBE £39.95

THE PROFESSIONAL WORD PROCESSOR designed for the serious user * All operations fully prompted * No special knowledge of the computer system necessary * Document size NOT limited by computer memory * Automatic disc buffering ensures text is moved between disc and computer memory without user

intervention * Up to 255 pages in a single document * 80 column display * On screen underline and right justify * See it as it will be printed. Integrates with Database.



DATABASE £49.95

A superb record keeping system with an incredible operating speed. 96 fields per record * One record 2 Kb max * One field 900 characters max * 4000 records per database * 16 level conditional search * Record match * 8 automatic sub indexes * Total flexibility of output via report writer with ability to write back to the database * Maths

pack * Semi programming language plus compiler. Integrates with Scribe to give conditional search with MAIL MERGE and high powered report formatting. Comes in ROM.

DATASCRIBE £69.95

Scribe & Database in a single chip! Contains all the features of both products



SCRIBECHEC £ 19.95

TYPING/SPELLING CHECKER.

The fastest typing checker available, * 7200 word base dictionary in ROM plus room for your own 15,000 (approx) word dictionary on disc * Any number of dictionaries Any

document length. Also available for wordwise & view



MINI ROM BOARD £14.95

Provides four extra ROM sockets. Easy fitting and without any of the overheating and space problems associated with large expansion boards. FOR BBC MODEL B ONLY

SPECIAL COMBINED PACKAGE OFFER

Datastag & Database (in one chip) 1 £69.95

DATASTAG £49.95



STATISTICS AND GRAPHICS PACKAGE. (ROM BASED)

A highly professional system which integrates with Database. Allows you to store your data in any format and, using Database, present all or selected items of data for graphing and statistical analysis * Graphs include Pie, bar,

histograms, line plot, scatter plot * Display between one and four graphs simultaneously * Automatic scaling and direct digital readout of graph co-ordinates * Statistics include all standard tests plus linear regression and correlation etc * seven non-parametric tests * Epson screen dump included with facility to add your own printer dump.

NEW MERTEC TITAN CHIP FOR THE BBC MASTER 128

Six integrated packages with one chip! £95

WORD PROCESSOR DATABASE GRAPHICS-SPELLING

-STATISTICS SPELLING CHECKER FOR SCRIBE

CHECKER FOR VIEW **BBC MASTER NETWORKING ENQUIRIES WELCOME**

ALL PRICES INCLUDE VAT ADD 60p P&P



MERTEC COMPUTER PRODUCTS

Please supply the following products/information

Qty..... of

I enclose £..... inc P&P

My Credit Card No. is

VISA ACCESS Tick which

TO BUCON LTD (Mertec Computer Products) FREEPOST, SWANSEA, SA1 1LZ.

TEL. 0792 467980

IMPORTANT NOTE: Please check with us if you decide to use any other disc interface than Acorn or Double-Dos with Scribe or Database.

Martin Phillips discusses indirection operators and shows how they can be used safely

INDIRECTION **OPERATORS**

The indirection operators were unique to the BBC micro when it was first produced. They are an elegant method of looking at ('peeking') and directly writing to ('poking') the computer's memory, but have had little light shed on them. The reason is that they can result in poor programs that do not work in all circumstances.

As a simple rule, do not use them to look at where the computer stores its own working numbers, as these locations can differ between machines (and can usually be accessed using one of the operating system calls provided by Acorn). Some readers might say: 'What does it matter, I only use it on my machine,' but there may come a time when you want to use a program on a friend's BBC micro, Master or Electron and you find it will not work. The same may be true if you upgrade, with say, shadow RAM. Also many programs sent to Acorn User have to be rejected because they might only work on a few machines, or make 'illegal' use of the BBC micro's memory.

Enough of the warnings. Let us have a play with indirection operators to discover how they can be used safely. There are three indirection operators:

byte indirection operator ? query ! pling word indirection operator

\$ dollar string indirection operator A byte is one 'working' memory location. A 'working' memory location is a pigeon hole that can store any number in the range zero to 255. This is not the same as a single memory location buried in a memory chip. Indeed it takes eight individual chip memory locations to obtain one 'working' memory location or byte. The '?' operator will read from, and write to one byte. The "!" operator will read and write to four successive bytes. The '\$' operator will write up to 256 successive locations.

To understand better how these operators work it is useful to be able to look at how the memory locations change. Listing 1 (see yellow pages) will do this. It will display a 'page' of memory (figure 1). A page is 256 bytes of memory. Four pages | Figure 1. Output from listing 1



make up 1k of memory.

When entering the start point of memory this should be given in hexadecimal (hex for short). It is easier to work in hex in this application. There are three columns of characters displayed by this program. The column on the left gives the actual memory location of the left-hand cell on that line. The middle column gives the number stored in that memory cell. The number is printed in hex. The right-hand column translates that hex number into the appropriate ASCII character where possi-

Star									
&190		0		1E			48	69	Hi
&190		74.	73	20	26	20	54	69	nts & Ti
&191		73	20	2D	20	4C	69	73	ps - Lis
&191		69	6E	67	20	31	D	0	ting 1
&192	20 14	18	F4	20	42	79	20	4D	By M
&192		72	74	69	6E	20	50	68	artin Ph
&193		4C	6C	69	70	73	D	0	illips
&193	18 1E	18	F4	20	46	6F	72	20	For
&194	0 42	42	43	20	42	2F	42	28	BBC B/B+
&194		4D	2F	45	2F	43	D	0	/M/E/C
&195		1F	F4	20	28	63	29	20	((c)
&195	58 41	63	6F	72	6E	20	55	73	Acorn Us
&196	60 65	72	20	41	70	72	69	6C	er April
8:198	68 20	31	39	38	37	D	0	32	19872
&197	70 5	3A	D	0	30	8	40	25	.:<. @%
8197			D	0	46	8	EF	20	=3F
&198		34	D	0	50	A	61	24	14. P. a\$
&198			20	22	D	0	5A	A	=" "Z.
8199			3D	22	20	22	D	0	ь\$=" "
8199			E8	20	22	53	74	61	d "Sta
&196			20	61	74	20	70	61	rt at pa
&196			20	26	22	20	73	74	ge &" st
&191		72	74	24	D	0	6E	18	artsn.
&191			67	65	3D	AO	28	22	page=. ("
&190			20	2B	20	73	74	61	&" + sta
&190			24	29	D	0	78	22	rt\$)x"
&191			6C	6F	63	61	74	69	. locati
8:191			3D	70	61	67	65	20	on=page
819			70	61	67	65	2B	26	. page+&
&191			20	88	20	38		0	FF . 8
&19			F1	20	22	26		3B	"&";
8.191	FB 20	7E	9C	6F	63	61	74	69	~locati
1									

ble. The control codes (codes in the range zero to 31) or codes greater than 126 are not translated, and are replaced by a full stop instead.

Listing 1 can be condensed down to fit into a function key (see figure 2 on page 43). Key 0 has been defined. Here the listing has had to be broken down into several lines. When typing it in you should not move onto a new line. By entering it as line 10 it is possible to edit it easily if it does not work the first time, and also it can then be saved as a tape or disc program, though do remember to run it first! Enter the starting point in hex, and away it will go. It will print out as well. Before pressing Return but after entering the start point, press CTRL-B, and when it has finished printing, press CTRL-C to stop.

This listing will be required if you want to try out the next few ideas, but it is not necessary to print out the whole page, so change the &FF to read &F, and it will print just two lines, that is 16 locations.

Switch the computer off and on again to reset the memory. Then load in the memory dump program and examine location 2000. You should get a display like this:

&2000 0 0 0 0 0 0 0 0 &2008 0 0 0 0 0 0 0 0

Locations &2000 to &2015 will all contain zeros. Now type:

?&2000=8

and display the result again. Location &2000 should now read eight:

&2000 8 0 0 0 0 0 0 0 &2008 0 0 0 0 0 0 0 0

We could replace the &2000 by the following variable:

M% = &2000

?M% = 12

This will put 12 (hex C) into location

&2000 C 0 0 0 0 0 0 0 &2008 0 0 0 0 0 0 0 0

Then the M% can give the starting point for the memory locations:

M%?1=5 &2000 C 5 0 0 0 0 0 0 &2008 0 0 0 0 0 0 0 0

To read a memory location one asks the computer:

PRINT &M% or alternatively:

nputersb



Sprint 7/9 MS	£2.80	62.30	£2.10
Sprint 7/9 FAB			
	£3.90		£3.10
GP/00 Colour. One Off			£18.50
	00.6£	£5.50	£5.20
	£3.70	£2.90	£2.70
Fastext 80 (Twinpack)	£11.70	£11.20	£10.90
TPI M/S			£7.20
TPI Fabric			£3.40
			£4.50
			£3.90
			£5.30
			£1.00
			£4.30
MLIO	£5.40	£4.70	£4.40
	Sprint 7/9 MS Sprint 7/9 FAB GP50 GP80 GP100/250 GP500/550 GP700 Colour. One Off SP1000 CP80 Fastext 80 (Twinpack) TPI M/S TPI Fabric TPI Corr D100/200 D300 DP/GEMINI/SG SR15 NL10	Sprint 7/9 FAB	Sprint 7/9 FAB

	DISK BOXES		
MODEL	SIZE	CAPACITY	PRICE
DD40L	3"/3.5"	40	£8.50
GS100	3.5"	100	£13.90
DD50	51"	50	
DD100	51"		
LIBRARY CAS	E 51"	10	
NON-LOC	KABLE DISK B	OXES	11.50
MD12/30	3"/3.5"		67.20
MF50			
MICRODRI	VEHOLDERS	30	10.00
	·····	4	C1 75
,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,		20	14.50
DD100 LIBRARY CAS NON-LOCI MD12/30 MF50	51"	100	£8.90 £11.70 £1.50 £7.20 £8.00 £1.75 £4.50

FLOPPY DISKS



51"		BOXES	OF 10 I	DISKS
JVC inc Pl	astic Case	1-2	3-9	10+
MD-1D	S/side D/dens 40TR	£9.99	£9.50	£9.25
MD-2D	D/side D/dens 40TR	£11.99	£11.50	£11.25
MD-2DD	D/side Q/dens 80TR	£15.99	£15.50	£15.25
MD-2HD	D/side H/dens 1.6MB	£26.99	£25.99	£25.49
VERBATIA	A - DATALIFE			~
MD525	S/side D/dens 40TR	£11.60	£11.00	£10.60
MD550	D/side D/dens 40TR	£14.80	£14.00	£13.60
MD577	S/side Q/dens 80TR	£14.99	£14.75	£14.49
MD557	D/side Q/dens 80TR	£19.50	£19.00	£18.60
MDHD	D/side H/dens 1.6MB	£27.99	£26.99	£25.99
FUJI	*S/side D/dens 40TR	£10.99	£10.50	£10.25
	*D/side D/dens 40TR	£13.49	£12.99	£12.75
*Coloured D	isks - red, green, blue, bei	ge, grey £1	.00 per be	ox extra.

	side D/dens 801R	£17.99	£17.50	£17.25
3}"		BOXES		
JVC/TDK	S/side D/dens	£17.99		
SONY/FUJI	S/side D/dens	£18.99		
FUJI/TDK	D/side D/dens	£26.99		
SONY	D/side D/dens	£27.99		
BULK 3 D/S	IDE D/DENS DIS	KS BY VER	BATIM	220.77
	10 x Disks			

20 x Disks £1.89 each £37.80 pack 3" DISKS



500 500

250 £17.90

PRINTER CABLES &



AMSTRAD
ATARI ST
BBC
IBM
MSX
CBM 64/128
SINCLAIR QL/SPEC 128
SINCLAIR SPECTRUM
AMSTRAD PCW Parallel I/F Parallel I/F £39.90 £26.50 £32.50 £49.90

COMPUTER STATIONERY



PLAIN WH	TE WITH	MICRO-PERF E	DGES P	RICE
SIZE	GSM	QUANTITY		2 BOXES
11 x 9½	60	2000	£12.50	£12.00
11 x 9	70	2000	£15.50	£14.50
EXACT A4	70	2000	£20.90	£18.75
113 x 91	90	1000	£13.20	£11.25

COMPUTER LABELS



Price per thousand in brackets 000 2000 4000 5.40 £8.80 (£4.40) £16.00 (£4.00) 5.50 £9.00 (£4.50) £16.40 (£4.10) 70 x 36mm 89 x 36mm 89 x 49mm 3 across only £7.20 £12.40 (£6.20) £22.80 (£5.70) 102 x 36mm £5.70 £9.40 (£4.70) £17.60 (£4.40) Please state number of labels across sheets (1, 2 or 3).

PRINTE	RS	COMPU'	
Epson LX86	£199.95	Acorn BBC Master	
Epson FX800	£319.95	Acorn BBC Master Compa	
Epson FX1000	£409.95	Amstrad PCW8256	
Epson EX800	£415.95	Amstrad PCW8512	
Epson LQ800	£469.95	Amstrad CPC464 Green	
Citizen 120D	£155.95	Amstrad CPC464 Colour	
Amstrad DMP2000	£139.95	Amstrad CPC6128 Green	
Amstrad DMP3000	£165.95	Amstrad CPC6128 Colour	
Panasonic KXP1080	£149.95	Atari 520STM	
Oki-mate 20 Colour	£169.95	Atari 520STFM	
Micro P MP165	£199.95	Atari 520STFM+mono	
Seikosha MP1300A	£389.95	monitor	
star NL10 inc I/F	£199.95	Atari 1040STF	
otar NX15	£299.95	Atari 1040STF+mono	
star Powertype Daisywheel	£199.95	monitor	
uki 6100	£259.95	20 Meg Hard Disk	
IP Laserjet Laser Printer	£1549.95	Mono monitor	
Canon A-1 Laser Printer	£1629 95	Colour monitor	

TRAD	
+ Software	£126.95
512K Syst 1 trum 128K + 2	£995.95
Disk Drive	£168.95
C128D	£429.95
C64C compend.	£204.95
C64	£139.95

PC1512

ERS

£399.95 P.O.A. £379.95

£475.95 £169.95

£249.95

£325.95 £213.95

£327.95

£409.95 £489.95

£572.95

£329 95

Single Drive Mono Monitor	£435.9
Double Drive Mono Monitor	£539.9
Single Drive Colour Monitor	£599.9
Double Drive Colour Monitor	£709.9
HD10 Meg Mono Monitor	£779.9
HD20 Meg Mono Monitor	£879.9
HD10 Meg Colour Monitor	£949.9
HD20 Meg Colour Monitor	£1049.9
3	

Maxe	11 51/4"	MDID
S/side	D/den	s 40TR
D	-110	

Box of 10 (min. 2 boxes) £9.99

SONY 31/2" D/side D/dens Box of 10 £27.99

TDK 51/4" S/side D/dens 40TR Box of 10 (min. 2 boxes) £8.99

> CF2 3" Disks Box of 10 £29.90

DELIVERY

All consumables and software post free Hardware £5 + VAT 4 Day Delivery £9 + VAT 24 Hour Delivery

COMPUTERS BY POST GUARANTEE If after buying any of the hardware or software in this advertisement, you find the same item offered at a lower price locally within one week, we will refund the difference.

All prices exclude VAT CREDIT CARD HOT-LINE



Computers by Post, 30 Bayford Rd, Littlehampton, West Sussex.

Export Enquiries Welcome

My computer is		
I enclose cheque/PO for £ or charge my Access/Visa No:	inc VAT	VISA
Name		
Signature		WOLL
Address		

HINTS & TIPS

PRINT M%?1

The pling operator works in the same way. !M%=&12345678

will produce:

&2000 78 56 34 12 0 0 0 0 xV4..... &2008 0 0 0 0 0 0 0 0 0

The values put into memory, just happen to be 'x', 'V' and '4' in ASCII. Notice now

10 *KEYO@%=3:VDU14:IN
."%"s\$:p=EV.("%"+s\$):F.1
=p TO p+&FF S.8:P."%"~1;
" ";:B\$=" ":F.L=O TO 7:c
=1?L:P.~c;:IF c<32ORc>12
6TH.c=46:B\$=B\$+CHR\$c:N.:
P.B\$:N. EL.B\$=B\$+CHR\$c:N

Figure 2. Listing 1 condensed

that the four bytes are placed backwards in memory. This appears complicated but seldom causes problems. This operator is useful for storing and reading integer variables (the variables followed by a % sign) which occupy four bytes. Real variables are stored in five bytes, so cannot be stored in this way. They can be converted to a string however and then stored.

The dollar operator works similarly, but puts a string into the nominated place in memory. To distinguish it from an ordinary string, the \$ sign is placed first:

\$M%="Acorn User"

&200041636F726E205573AcornUs &2008 65 72 D 0 0 0 0 0 er.....

Notice one difference with the dollar indirection operator. As this operator can take a string of any length from zero to 255 characters, it has to put a marker at the end of the string. This marker is the ASCII code for Return, &D. A neat way of manipulating strings can be achieved using the dollar indirection operator. Thus:

M%=M%+6:PRINT \$M%

will print 'User'. The dollar indirection operator can be used in much the same way as the LEFT\$, MID\$, and RIGHT\$ Basic statements, but can be much more flexible in use. For example:

- 10 M%=&2000
- 20 \$M%="Acorn User"
- 30 FOR N%=M%+10 TO M% STEP-1
- 40 PRINT CHR\$ (?N%);
- 50 NEXT N%

This small program above moves the pointer N% to the last character in the string, where the number is retrieved and printed out as an ASCII character. Thus by stepping backwards through the string, it can

in fact be printed out in reverse.

A final point is a consideration of which area of memory is used. With these indirection operators, we need to ensure that the memory area chosen does not affect anything else, or is likely to be overwritten. So far, all the examples have used areas of memory that I know to be safe for these examples. We could have let the computer choose a safe memory area:

DIM M% 1000

which will reserve 1001 bytes (remember that the computer starts counting at zero), and consequently the starting position will be held in the variable M%.

Basically that is all there is to indirection operators. What can they be used for? One thing that they are very useful for is manipulating text. Text can be loaded into a spare part of memory and then manipulated in many ways. Listing 2 (on the yellow pages) shows one example of this. This program is designed to alter text files from one wordprocessor so they can be read by other wordprocessors. This program will enable files to be transferred easily between View and Wordwise amongst others. It should be noted that files for View will need to be loaded in using the READ command rather than the normal LOAD command.

The problem in transferring text files is not usually that the formats are incompatible, but there are a lot of unwanted characters or spaces used to pad out the lines and returns which force new lines. These are often very tedious to edit out and transferring a View file to Wordwise can take quite some time. Therefore what this program does is to look through the text file, and change any control code characters to spaces. In particular it gets rid of all the return characters which force a new line (though View will put a few back in). Then the program goes through the file again and removes all the surplus spaces that it finds, so that there is not more than one space together.

It does this by looking for multiple spaces and then shuffling the rest of the text file down in memory to overwrite the surplus spaces. Then the file can be resaved, and loaded into another word-processor. As the text will now be completely unformatted it will be necessary to go through it and reformat it, but this is usually straightforward.

To use the program, first find the length of the file in hex. This can be found from a

disc file by using the *INFO command. The file length is the third number that will be printed out. Then load the file into some area of memory, &3000 is a suitable place, eg, to load a file called 'JUNK' use the command:

*LOAD 'JUNK' 3000

Then load and run the file conversion routine. It will ask for the start position of the text, in this example it will be &3000. Then it will ask for the file length. When this has been input, the program will unformat the text file, and when it has finished it will give the new file length. Then the file can be resaved. For example if the new file length is &5AB, use the following command:

*SAVE JUNK 3000 +5AB

For those that want to unformat *Wordwise* files, a procedure can be added to remove all the embedded commands. This looks through the text for the start code (ASCII code 2) and changes everything after it to spaces until it meets the end code (ASCII code 7). This latter code will be changed by line 120. The program will then strip out the surplus spaces. Add the lines in figure 3 (below) to listing 2.

115 PROCwordwise 330:

340 DEF PROCwordwise 350 PRINT "Removing em bedded commands"

360 FOR N%=S% TO E% 370 IF ?N%<>2 THEN GOT

0 410

380 REPEAT

390 ?N%=32:N%=N%+1

400 UNTIL ?N%=7

410 NEXT N%

420 ENDPROC

Figure 3. Additional lines to listing 2


Similar procedures could be implemented to remove codes from other wordprocessors. To find these codes, use listing 1 after loading a sample text file into memory. It is then quite easy to identify particular formatting codes.

A second example is a program that has long fascinated me, ever since I saw a version in the Acorn Atom handbook. This is a tree-type database program (listing 3 on the yellow pages) that learns as it goes along. By using the indirection operators, this type of database is actually quite easy to program.

The program could have been achieved

THE OAK PROFESSIONAL COMPUTER MASTER RANGE

Unbeatable performance and prices to match!

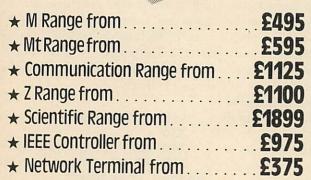

All prices shown above are exclusive of carriage and VAT.

Optional keyboards







For further information of the complete range please complete and return the coupon.



OAK COMPUTERS, Cross Park House, Low Green, Rawdon, Leeds LS19 6HA. Tel: (0532) 502615. Telex 51311 Relays G.

Please send me details of the Oak Ranges. My main use is:

Home Business Scientific Education

.....

HINTS & TIPS

in a number of ways; arrays for instance. A tree-structured database has a structure like figure 4. These programs can be made to learn as they go along. If the program reaches the end of the tree, and the correct animal is not found, it will ask what the animal was. A new question then has to be entered, and this is added into the structure, so that the tree grows.

Listing 3 shows a tree program for animals. It could easily be adapted for a variety of tasks. A sample text print out would be:

Are you thinking of an animal?

Yes

Does it have four legs?

No

Is it a sparrow?

No

What were you thinking of?

A duck

Tell me a question that will distinguish between a sparrow and a duck?

Can it swim?

What would the answer be for a sparrow?

No

The last question is necessary because the program needs to know whether the question that has been input refers to the duck or the sparrow. Then the program will start again. If you are not thinking of an animal, then the program will save the tree structure, which can then be loaded in the next time.

The program has a very simple storage structure. Basically each entry has three elements. The text, a 'yes pointer' and a 'no pointer' as shown in figure 5 below. The program is easily able to differentiate between an animal and a question because the animals do not have a yes or a no pointer to jump to. When a question has been asked, the program will jump to the location given by the 'yes pointer' or by the 'no pointer'.

Programming this is really quite simple.




Figure 4. A tree structured database

The first 40 locations are reserved for the text string. The next four are for the 'yes pointer' and the next four are for the 'no pointer'. E% gives the current end of memory position. a% gives the offset to the 'yes pointer', b% gives the offset to the 'no pointer', and c% gives the offset to the new end of the file. Thus to add a new animal the following structure is used:

\$E%="A DOG"	Put text into
	memory.
E%!a% = 0	Put 0 into 'yes
	pointer'
E%!b% = 0	Put 0 into 'no
	pointer'
E% = E% + c%	Move end of
	file pointer

Finally listing 4 is the essential add-on to the tree program, a method of editing the text in the tree structure. This is a most useful extension.

Description of listing 1

Line 60 Set print format to three (each number will be allowed three spaces when printing out) and put page mode on.

Line 100 Get the start point for the memory dump. This must be entered in hex. The input is entered into a string, as the INPUT statement will not accept a hex input.

Line 110 Convert the string back to denary

using the EVAL statement.

Line 120–220 Loop to cycle through one page of memory eight locations at a time. This could be altered to look at more than one page, or less than one page by altering the &FF.

Line 130 Print memory location at start of each line. The will stop the print statement going to a new line after printing.

Line 140 Set B\$, the string that will contain the ASCII characters, to contain the space code only.

Line 150-200 Loop to print out the contents of eight locations.

Line 160 Look at the memory location (location+line) and store in the variable called 'contents'.

Line 170 Print out value in hexadecimal. Line 180 If the ASCII value is less than 32 or more than 126, replace its value with the ASCII value for a dot instead. If a number less than 32 or greater than 126 is converted to its ASCII code, all sorts of odd effects can and do happen. Try leaving this line out to see the effect!

Line 190 Add the ASCII character onto the end of B\$.

Line 210 Print out the ASCII codes for that line.

Description of listing 2

Lines 70–110 Input the file start position and the file length. These must be entered in hex, which is more convenient as the load and save addresses are given in hex. The input is entered into a string, as the INPUT statement will not accept a hex input. The strings are converted back to denary using the EVAL statement.

Lines 110–130 Go through the text changing characters less than 32 or more than 126 to spaces. These can be removed.

Lines 140–180 Go through the text again, this time looking for spaces. If two spaces are found together then go to PROC-shuffle to remove the surplus spaces. A message is printed on the screen, mostly for reassurance that the program is actually doing anything!

Line 190 Print out that the program has finished.

Line 200 Print out the new file length to be saved. This should be less than the original file length. By saving the exact file length it avoids having extra garbage included at the end of the text. Note that this program could easily be extended to automatically load and save the file. See listing 3 for details of how to do this. Also it is possible to automatically find the old file length by

Location	Text	Yes PTR	No PTR
3000	Does it have four legs	3030	3060
3030	A dog	0	0
3060	Can it swim	3090	30C0
3090	A sparrow	0	0
30C0	A duck	0	0
30F0			

Figure 5. Program storage structure

MORLEY ELECTRONICS

TELETEXT

NOW INCLUDING ATS (ADVANCED TELETEX SYSTEM)

The Morley Teletext adapter introduces you to the world of Teletext at a price that wont break the bank. Inside it you will find the latest in second generation Teletext chip technology, which unlike our rivals who are still using chips designed more than eight years ago, will be fully compatible with any future advances in the Teletext system.

With the Morley adapter you will get a unit that automatically tunes itself in to the required station (no more messing around with screwdrivers in the back of the case), a user friendly menu driven program, easy to follow instructions and a 12 month warranty. Add to this the free downloadable telesoftware and we are sure that you will agree that we are offering you one of the best bargains on the market

For technical details please ring Morley Electronics on Tyneside (091) 262 7507 after 4.00 pm

 Advanced design uses the latest technology will handle ANY future enhancements to the Teletext system eg: full field: 8 bit data transfer: 2k pages etc.

Simply plugs into the user port.

Low power consumption, less than 200ma.

Optional power supply available.

User friendly menu driven software including extended OSCLI and Osword commands for access from BASIC programs.

Supplied with 16k support ROM software inc

printer dumps, page spoolers etc.

FREE Telesoftware, no access charges. (at present updated weekly.)

 Save selected pages to disc/tape for later retrieval.


Full access to all Teletext services and channels eg: CEEFAX, ORACLE, 4-TEL.

Gives you a real-time clock at your disposal

 Free software upgrades to allow for any enhancements to the teletext service. Eg: extra channels, full field data on cable & satellite systems etc


Easy to follow comprehensive user guide. No hardware limitations, it can for example receive virtually unlimited numbers of channels.

Works with Solidisc SWR.

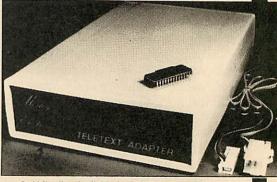

Utils disc available including printer drivers allows pages to be selected and dumped direct to a printer (no more TV or Radio Times to buy).
 ELECTRON TELETEXT ADAPTER

Electron adapter now available, including emulated Mode 7 allowing you to run long Adventure type programs. Please ring for details.

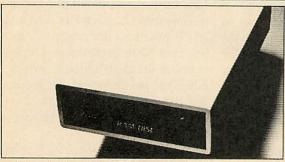

Now available the first true MEGA capacity RAMdisc for the BBC or MASTER computers.

This fully compatible unit, currently available in either 1 or 2 megabyte versions comes complete with operating software on ROM, power supply, battery backup and a comprehensive user guide, add to this our usual 12 months no quibble guarantee and we're sure you'll agree Morley have done it again.

FEATURES

NAME . ADDRESS _

1 Megabyte of RAM connected to the 1 MHz bus.
Used with the supplied ROM software programs and files may be saved and loaded from the RAMdisc in the same manner as from a floppy disc with a large increase in speed, for example, a 20K mode 0 screen takes about 3-4 seconds to load from disc and about 0.2-0.3 seconds to load from the RAMdisc.

The RAMdisc ROM operates as a utility ROM working with the current filing system rather than as a separate filing system. Therefore ensures compatibility with any Acom compatible DFS (not ADFS). The RAMdisc can be selected by a * command to take the place of any drive number from 0 to 9. If the RAMdisc replaces a floppy drive as 0 for example, all commands addressed to drive 0 will be intercepted by the RAMdisc. The default drive no. is 4.

'Dangerous' * commands such as *COMPACT, *COPY, *BACKUP etc are intercepted and the BBC's RAM from page 2 to &7FFF is saved to RAMdisc workspace, and may be recovered using a * command. This prevents accidental corruption of any programs/data in RAM you may have been using at the time. The save operation delays the * command by just under 0.4 seconds. The BBC's RAM can also be saved by an interrupt-driven routine which can be enabled by a * command.

The 'filing system wedge' ROM supplied supports load/save, byte file access, all relevant OSFSC commands, and contains a formatter,

EPROM PROGRAMMER now available programs 8, 16 and 32k EPROMS connects to the user port software available on rom or

Version 1 economy uncased with standard DIL socket.

Version 2 deluxe cased with ZIF socket. **DESFAX 7** – Now you can run your own TELETEXT service! Incorporates the powerful editing facilities of DESIGN 7, again with Teletext adapter interfacing.

Stores up to 100 of your screen designs on a 40Tk disc or 200 on an 80Tk. Page selection by 3-digit number HOLD, REVEAL, page

linking, individual page delays etc.
PLUS – a powerful CAROUSEL facility permits continuous slide-shows. Only one disc access for every 16 screens - reduces wear on drives. Smooth animation, variable speed text printing, built in printer dumps. Sample data disc and 22 page manual included. Beats all other systems for ease of use and versatility.

M/B software DESIGN 7

Easily the best value Mode 7 screen designer on the market today. Design any mode 7 screen, from simple MENU pages to full CEEFAX standard. This program is an invaluable aid. Designs can be saved to disc as automatically numbered files or the program will convert the screen into a Basic Proc.
INTERFACES DIRECTLY WITH ADAPTER allowing

CEEFAX-ORACLE pages to be selected and dropped into editor screen for alteration, saving, or conversion to BASIC. Allows channel change from within program.

M/B software MASTER COPY

the selective copier you need for the BBC MASTER computer . . . Dramatically reduces the time taken to copy unprotected discs, DFS to ADFS, ADFS to DFS, DFS to DFS, ADFS to ADFS

using one or two, single-ro double-sided drives.

An 84K RAM buffer enables many files to be copied in one pass with the minimum of disc swapping, and directories are created automatically as

required. Files of any length are handled.

Supplied on disc, MASTERcopy runs form sideways RAM and is invoked with a * command. The program re-installs itself in sideways RAM when copying is done, ready for later use.

The ROM image supplied can be used to blow your own EPROM too, for use in the MASTER's cartridge slots.

Typical time to copy all 31 files DFS to ADFS is under 2 minutes! £12.95 on disc – £14.95 for ROM version (including postage etc.)

For further details on all products

Catalogue structure allows up to 2,709 files.	tall (U9 I	202	1001	anter	4.uupn	n
order please fill in and send order form to: MORLEY ELECTRONICS, Unit 3.	Maurice F	Road Indi	ustrial Est	ate. Wallse	end. Tyne a	nd Wear NE28	6B

Adaptor Soft	ware	Please send me		Qtv. Optional PSU	@ £9.95 inc. VAT
ROM SWR DISC 40 TRK 80 TRK Please Tick	0000	Oty. Morley Teletext adaptors Oty. Master Copy ROM Oty. Master Copy Disc Oty. M/B DESIGN7 screen designer Oty. Teletext utilities on Disc	@ £119 inc. VAT @ £13.95 inc. VAT @ £11.95 inc. VAT @ £7.95 inc. VAT @ £5.95 inc. VAT	Oty. 1 Mbyte RAM disc Oty. 2 Mbyte RAM disc Oty. Eprom Programmer V Oty. Eprom Programmer V Oty. Desfax	
				Total £	BARCLAYCARD





HINTS & TIPS

using disc filing system (DFS) calls.

Lines 230-320 The procedure to remove any extra spaces.

Line 250-27') These lines were included to speed up the program. Basically it will check to see if there is a long string of spaces together, all of which can be deleted in one go.

Lines 280–300 Step from the current point in memory to the end, relocating the text down the number of places determined by line 250.

Line 290 This line is the heart of the procedure. It says take the s%th character further on from N% and put it in the location at N%. If this is repeated for the rest of the text, then the text will be shuffled down in memory and will therefore overwrite the surplus spaces.

Line 310 Reduce the end point by the number of spaces removed.

Description of listing 3

Line 70 The initialisation procedure. Line 80 The procedure to load a file. Line 90 The main procedure.

Line 100 The procedure to save the tree. Lines 140-150 S% is the start of memory location. E% gives the end point in the memory. Initially this is set to four locations further on from the start point. This then allows space for this pointer value to be added at the start of the file when saving to tape or disc. a% allows space for a text file of 39 characters plus a return code. b% allows space for the text file and the first pointer. c% is the total length for a single

Lines 160–210 Data to start the tree. The text in these lines can be changed to suit ones application.

Line 250 P% is the pointer to the memory location of the current record.

Line 260 Clear any text windows and clear the screen.

Lines 270–280 Print the title in double height. Electron owners should not enter line 280, and should omit the CHR\$141.

Line 290 Set a text window on the screen so that the title is not scrolled.

Line 300 The question to start the tree off. Again the text here can be changed to suit one's application.

Line 310 A procedure which will only accept a 'Y' or a 'N' as an input.

Line 320 Answering 'N' here will end the program after saving the current tree file. Line 330 The 'yes pointer' will be zero if the text contains an object rather than a question. Therefore if an object is recog-

nised, the words 'is it' are printed out.

Lines 360–370 If an object than either the computer wins or a new object can be added to the tree.

Lines 380–390 If a question then jump to the next branch in the tree.

Lines 430-460 Wait until the 'Y' key or the 'N' key is pressed, then print either 'Yes' or 'No'.

Lines 500–570 Input a new object and a new question. Checks are made to ensure that the length of the text is within the allowed length. Line 560 is necessary to ensure that the question is related to the correct object.

Lines 580–630 Put the new question and object into the tree and set the 'yes pointer' and the 'no pointer'.

Lines 670–720 Ask if there is a tree to load. If yes, load the file 'TREE' into the memory area reserved for the tree. Save the memory area of the tree. It is always saved under the filename 'TREE'.

Description of listing 4

Lines 80–100 The load and save procedures are the same as listing 3 (except that there is no option but to load the file), and instead of the run procedure there is an edit procedure.

Line 140–150 Print the title in double height. Electron owners should not include line 160 and should omit the CHR\$141 in line 150.

Lines 190–240 Step through all the text, allowing a new input to be made as required. Simply pressing RETURN leaves the original text unchanged.

See yellow yages 127-128 for full Hints & Tips listings.

PRESERVING ARRAYS

When DIM is used in a Basic program, it reserves a section of memory for the array. The size of the reserved section depends upon what type of array (whether byte, integer, real or string array).

When the program is run the memory space is used for the arrays and for any other variables that are created. If the program is stopped by any sort of error, then the variables are still accessible. Try this:

10 DIM A\$ (2) 20 A\$ (1) = "Fred" 30 STOP

Run the program: it stops at line 30. Type in:

PRINT A\$(1)

It's still there! All the variables are still accessible, and the program can be listed in the normal way.

A problem arises if a program line is edited. Basic loses track of all the variables, and they cannot easily be found again. This is because extending a program line makes use of the memory above the program. The edited program may be longer than the original. It is this very memory that contained the arrays and variables, so they may be overwritten and lost.

In some types of program, it is imperative that the variables, particularly arrays, be retained if the program crashes.

One way to do this is to write an ON ERROR routine that saves the arrays before ending the program:

10 ON ERROR PROCerror
20 DIM A\$(2)
30 A\$(1) = "Fred"
40 REM rest of program

:
100 DEF PROCerror
110 F% = OPENOUT "Safe"
120 FOR A% = 0 TO 2
130 PRINT# F%, A\$ (A%)
140 NEXT
150 CLOSE# F%
160 REPORT
170 PRINT "at line"; ERL

180 STOP

190 ENDPROC

This should save the array A\$() in a file called "Safe". It can be loaded into a new program using a procedure like this:

1000 DEF PROCreload 1010 F% = OPENIN "Safe" 1020 FOR A% = 0 TO 2 1030 INPUT# F%, A\$ (A%) 1040 NEXT 1050 CLOSE# F% 1060 ENDPROC

The new program should DIM the A\$ () array, then call PROCreload to read the saved array from the file.

10 DIM A\$ (2)
20 PRINT "Reload old array";
30 IF GET\$="Y" then PROCreload
40 PRINT


50 REM rest of program

This idea can be extended to other sorts of arrays too, so byte arrays or arrays of real numbers could also be preserved.

This may be of use when writing database programs, the data is in fact safe even is the program crashes.

Turn to the yellow page index on page 113 for, details of Martin Phillips' Hints & Tips listings.

BRAINSOFT 32k The best value sideways ram for the BBC micro



This unit utilises the latest static ram technology, it has 32K of sideways ram in a size no larger than a standard 28 pin EPROM. With only two flying leads terminated in clips to fit. This module only takes up one sideways rom socket, and does not use the user port to select ram banks, but instead uses the BBC's internal rom select circuitry to perform this function.

PRICE: 32K MODULE (featured) 16K (Piggy Back)

16K (EPROM size) Write Protect Switch add £16

SOFTWARE

SIDEWAYS RAM UTILITIES

* Menu drive software: ram load/save/test & ram list. * Printer buffer. * 12 page instruction book. * Programmers aids with 24 utilities, including a full-screen-memory-editor, string search, speed, rsave, verify, vars, vectors, status, ron, roff, rstatus, retrieve (program recovery), move & pack facilities. * Slate 8K or 16K version. * Supplied on 40/80T disk. * £4 on own or £2 with module.

CHIP SHOP

© НІТАСНІ 8К СМОЅ ВАМ НМ6264 LP-15 1-2 PCS £2.80, 3+ £2.60

TOSHIBA

EDUCATIONAL **DISCOUNTS**

BRAINSOFT 21 EDEN STREET KINGSTON-upon-THAMES LONDON KT1 1BL Telex 298552 ACT G

PRICES CHEQUES P/O ACCEPTED

4-Way mains trailing soci

RS232 (Serial)(Metal cased)
25-way D 1 to 2-way
25-way D 1 to 3-way
25-way D 1 to 4-way
25-way D 1 to 4-way
25-way Centronics (Parallel)(Metal cased)
36-way Centronics 1 to 2-way
269.

36-way Centronics 1 to 2-way Para. £54.00
36-way Centronics 1 to 3-way Para. £69.00

36-way Centronics 1 to 4-way Para 267-00 All cables at discount prices 9-00 rices 9-00 Para 267-00 All cables at discount prices 9-00 Para 267-00 Para

TELEPHONE EXTENSION CABLE

DISK HEAD CLEANERS

Plugs into phone socket.
Take your phone up to
50tt – no need to pay forextra extensions! in neat
case with carrying
handle. Approval No.
NS/22367/F459927.
British made. Top quality
for ONLY 19.95

DATA SWITCHBOXES

MONITOR LEADS MONITOR LEADS
Fidelity (Scart) to:
BBC/QL/Commodore/Sony/
Spectrum 128/Amstrad
Microvitee to: BBC/QL/
Spectrum 128/Amstrad
Ferguson to: BBC/
Comm. 64/MSX/QL
Spectrum 128/Amstrad
Hitachi to: BBC/Comm. 64/QL
Spectrum 128/Amstrad
Sony/Kaga to: BBC
Green screen to: Comm. 64/BBC
Green Screen to: Green Screen to: Q £4.95 £2.50 64/QL/ d £2.50 £5.95 Green screen to: QL Green screen to: Comm. 128 £4.95 £1.25 £2.95 Phono to Phono Philips to: BBC/Comm.64 BBC CONNECTORS

Plugs Sockets 20p 30p 40p 50p 30p 45p 35p 65p 80p £2.00 80p — 75p — £1.20 £1.45 £1.60 £1.85

RIBBON CABLE (Price per 1t)

ANY TYPE OF LEAD MADE TO ORDER

51/4" Wet type for use with single or double-sided disks, incl 6 cleaning sheets. £8.95 CASSETTE HEAD CLEANERS Wet type. Set includes Pin-wheel demagnetiser and full instructions C15 CASSETTES Box of ten ONLY £3.00

RS232 GENDER CHANGERS
Avoid modifying or replacing incompatible cables, m/m, f/t.
OUR PRICE 28.50

SURGE exth socket the paid of the dataptor the paid core cable per metre BT Plugs

£11.00 £12.00 double height for Disk drives etc. Add £3.50 Postage & Packing £22.00 PRINTER LEADS BBC 1m£7.95/1.5m £8.75/2m £9.50 BBC COMPACT MASTER

1m £9.95/1.5m £10.75/2m £11.50 BBC SERIAL 1.5m £8.95 IBM 1.8m £12.75

DISK DRIVE LEADS COMPACT MASTER to 514". 2nd
DRIVE In configured to select
drive one, connects to existing
lead \$12.75
POWER LEADS
BBC to DISK DRIVE Im.
Single \$2.75. Dual £4.50
DATA LEADS
Connects BBC to Disk drive Im
Single \$2.75. Business of the Single \$2.95
Bibbon Cable

CASSETTE LEADS

7-PIN Din plug to 3 jack plugs 7-pin Din plug to 7-pin Din plug £2.00 7-pin Din plug to 3-pin Din plug £2.50 + Jack plug + Jack plug to 5-pin Din plug £2.50

BBC EXTENSION LEADS 20-way m/f user port extn 26-way m/f Printer port extn £8.75 34-way m/f 1MHz Bus port extr 40-way m/f Tube extn Printer extn. Centronics m/f

£12.75 TELEPHONE CONNECTORS Surface master jack socket Surface extn socket Dual outlet adaptor Line jack cord 3mtr

TRADE ENQUIRIES WELCOME



75p P&P IN UK. Access & Visa accepted. Add 15% VAT to all orders Cheques made payable to:
RSD Connections Ltd, Dept AC4
PO Box 1, Ware, Herts.
Tel: 0920 5285/66284



5.25"	25	50	100	200	250
S/S D/D	£13.99	£25.99	£48.99	£95.99	£115.99
D/D 96TPI	£14.99	£26.99	£49.99	£96.99	£119.99
Coloured	£18.99	£35.99	£69.99	£129.99	£149.99
All disks are su Coloured disks	ipplied with wise run on any d	rite/protec Isk drive e	t tabs, lab	els and en	velopes.

double. 100 £75.99 £139.99 £259.99 £299.99 D/S 135 TPI £39.99 S/S 135 TPI £37.99 £72.99 £132.99 £246.99 £259.99

All disks come with a full lifetime guarantee and are made to TOP international standards.

Remember all prices include VAT & Delivery

SPECIAL OFFER BOX

Buy 100 5.25" disks and receive lockable storage box all at special price of £54.99

LOCKABLE STODAGE DOVES

0.01	MALDO	VILO
5.25"	Holds	3.5"
£11.95	100	£11.95
£9.95	50	£9.95
£1.95	10*	£1.95
*(not lockable)		



CENTEC 0689-61947

VISA

18 Crescent Way, Green St. Green, Orpington Kent BR69LS

Please call for bulk and educational prices

The System utility from KM Software Ltd

Extra commands for BBC B & Master users, Master features include CMOS editor, CHARSET to move the character set into private ram, PVIEW private ram editor.

For the BBC B user it implements the MASTER rom handlers (INSERT/UNPLUG etc), disabled roms stay off even over a CTRL+BREAK

Plus commands which can be used by both BBC B & MASTER, GPACK (powerful screen packer), Very powerful dissasembler (6502, 65C12, I/O, tube, lables etc.), memory editors, Down loader creator, Bad Program recover, Mode designer, Tube editors, Formatter, Verifier etc.

Price £25.00

Also available KM'S Sound to Light converter, This chip contains 10 different screens with an amazing 63 colours and responds instantly to sound input to the cassette port. Just play your favourite music and watch the colours and patterns flow.

Price £12.50

Are you fed up with Zapping aliens why not try STRATAGEN a strategy game for two to four players using colourful graphics as pieces on a large 10 by 8 grid, with options to pass, abort and even cheat (if you can find it . . .)

5.25 inch disc (40/80 track format): £7.95

Tape: £4.95

Send orders to: KM Software Ltd., 39 Clos des Ormes, Rue Verte, St. Lawrence, Jersey C.I.

FRSTBYTE

RAMMING IT HOME

We try to sort out the confusion between ROM and sideways RAM

Tessie Revivis

A letter came flooding into the Acorn User office from Keith Low of Pickering. Keith like many other readers is a little confused as to how ROM and RAM are arranged on the Master 128 and the Master Compact, so to try and remedy this, we'll take a breather from machine code this month in order to examine the memory arrangements of these two micros.

The Master 128 and Compact are supplied with 128k of memory. This does not appear as a single block of memory but is broken down into several sections. The 'first' 32k of this memory is random access memory, RAM for short. This is used to hold and run programs. Indeed the listings you enter from *Acorn User* are stored in this 32k.

RAM is volatile, which means that it will only hold programs while the power is switched on. Turn the computer off and the RAM contents fade away. This is why we must save our programs to tape or disc.

The next block of 32k is read only memory (ROM). This is non-volatile or permanent memory which is electronically programmed into special ROM chips. As such the contents remain unchanged even when power is switched off. This block of 32k is further divided into two blocks of 16k, the first of which is normally the Basic ROM while the second and the upper half forms part of the machine operating system (MOS) also sometimes known as the OS (operating system). Its sole task is to control the household operations, for example the screen display, getting characters from the keyboard, etc.

The first 64k is the total amount of memory that the 6502 series microprocessor can control: not much in these days of megabytes. To get round this limited memory Acorn designed into the original BBC micro sideways ROM and RAM. Figure 1 illustrates how the term 'sideways' originated with the ROM and

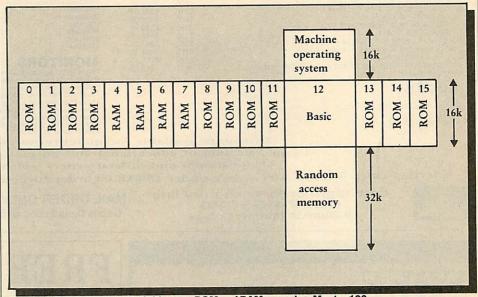


Figure 1. The arrangement of sideways ROM and RAM areas in a Master 128

RAM arrangements. The ROM and RAM slots, of which there are 16 in all, sit along side the Basic ROM.

As you can see from figure 1 only the Basic ROM sits in the main memory area, the 'memory map'. To gain access to the other ROMs it is necessary to lay them over the Basic ROM. This is normally termed 'paging a ROM in' and explains why the term paged ROM is sometimes used instead of sideways ROM.

The sideways ROM and RAM each measure 16k in length and each section of sideways ROM and RAM is called a 'bank'. There are four banks of sideways RAM in figure 1. These sideways RAM banks may be used in three ways. The first is for sideways ROM images. A ROM image is a ROM program that is saved on disc which can then be loaded into a sideways RAM bank to act as a ROM. Compact owners will know that they have View and Logotron Logo ROM images on the Welcome disc which can be loaded into a sideways RAM bank for use. Listing 1 (on the yellow pages) when run will create

a small ROM image on disc which you can then load into sideways RAM and by typing a single star command provide you with the length of your program and the amount of memory free.

Alternatively you can use the four sideways RAM banks as a continuous 64k of memory for use with Basic 128. BAS128 as it is known can be found on the Welcome disc and can be run using:

*LIB LIBRARY

*BAS128

The final use of the sideways RAM banks is for data storage and the banks may be used individually or in combinations of your own choice. Listing 2 provides a program which shows the RAM banks being used in this way.

To distinguish each ROM or RAM bank from an associate, each bank is given a number from zero to 15. The number of a bank is important as it indicates the ROM or RAM priority. The rule is the higher the number the more important the bank is. Thus if you have ROMs fitted in positions four and seven which both have a

SPECIAL LATE NIGHT LINE Evening enquiry and order telephone line from 5.30pm to 9pm. PHONE AT YOUR LEISURE: 02774 55076

	COMPUTERS	exc. VAT	VAT
ı	*********	****	****
	 Master 'Compact' New BBC system with integral 3.5" disc and separate keyboard. 128K RAM. Comes complete with a wide rang of software. View, Logotron and much more. 	e	
The same of	Base unit + UHF modulator Base unit + monochrome monitor Base unit + colour monitor	£385 £395 £465	£454.25 £534.75
ı	Colodi Montol	£595	£684.25
	BBC MASTER 128K with VIEW and other free software BBC B 32K (price subject to availability) ADFS Upgrade with manual 1770 DFS Upgrade with manual Eprom Cartridge	£390 from £200 £26 £45 £13	£448.50 £230.00 £29.90 £51.75
	DISKS		
THE SECOND	Box of 10 5.25" 96tpi double sided disks with free library case Box of 10 3.5" diskettes S/S with free library case Box of 10 3.5" diskettes D/S with free library case Disk storage boxes	£11 £20 £25 from £2	£12.65 £23.00 £28.75 £2.30
	PRINTERS	e.c. VAT	inc.
	Star NL10 30cps NLQ 120cps Draft	£205	VAT £235.75
1	Star SD10 40cps NLQ 160cps Draft Taxan KP815 160cps Draft	£319	£366.85
	MP165 34cps NLO 165cps Draft	£280 £195	£322.00 £224.25
	EP80+ 100cps Draft Epson LX86 28cps NLQ 120cps Draft	£130	£149.00
	Star Powertype Daisywheel – Dual Interface	£215 £169	£247.25 £194.35
	Juki 6100 Daisywheel 2000 sheets 11" micro-perf. fanfold paper Printer Ribbons Printer Ribbons	£249 £11 P.O.A.	£286.35 £12.65
	BOOKS		
	Master Reference Manual Part 1	£15	£15
	Part 2 View User Guide	£15 £10	£15 £10

GPD Systems

31 ABBEY RD BILLERICAY **ESSEX CM12 9NF**

PIOG BUIAES		
Mitsubishi 5.25" 2 year manufacturer's guarantee 40/80 switchable (switch at front of unit) Complete with Manual and Utility Disk.	exc.	inc.
WITHOUT PSU	VAT	VAT
Single 400k DS Dual 800k DS	£102 £190	£117.30 £218.50
WITH PSU Single 400k DS Dual 800k DS Dual 800k horizontally mounted in a monitor stand. Fits both the BBC and Master series.	£117 £215	£134.55 £247.25
Low cost 5.25" Hoshin drives 1 year guarantee	£250	£287.50
Single	£90 £170 £105 £190	£103.50 £195.50 £120.75 £218.50 P.O.A.
Hard disks from	2611	
Please telephone for information		
BBC FIRMWARE AMX Mouse with Super Art Rom		
Acorn View 3.0 View Store View Store View Store Wordwise Plus Printmaster (Epson or Star) Help ROM Spellcheck III Interword Interchart Interchart Interchart Interbase	268 260 245 245 240 223 221 228 245 245 245 228	£78.20 £69.00 £46.00 £51.75 £46.00 £26.45 £24.15 £32.20 £51.75 £32.20
Philips 8501 standard resolution colour Philips 8503 medium resolution colour Philips Monochrome green, anti-glare, High Res. Taxan 14" Vision PAL standard resolution colour Taxan Supervision III high resolution colour Taxan Supervision IVM ultra-res colour Taxan Monochrome green or amber Microvitec 1451 medium resolution colour Monitor stand for Master	exc. VAT £150 £249 £76 £192 £320 £345 £105 £233 £13	P.O.A. inc. VAT £172.50 £286.35 £87.40 £220.80 £368.00 £396.75 £120.75 £267.95
managed day and the same of th	LIS	£14.95

Discounts available for quantity purchases Large selection of educational and business software. Educational and official orders welcome.

Carriage (incl. VAT) £2.00 orders under £80/£8.00 orders over £80 + £2 for additional items



Late night order & enquiry line 02774 55076 5.30pm to 9pm weekdays

MAIL ORDER ONLY (callers by appointment) Goods Despatched within 24hrs subject to availability



Sorry! - Limited to one only per customer





large (100 disk capacity) lockable disk storage box worth £13.95 -

- When you buy 25 disks for only £19.95 including postage and VAT!

All disks supplied are superior quadruple density 51/4" DS disks which are best for both 40/80 track drives.

Nebulae, Dept MH, FREEPOST, Kilroot Park Industrial Estates, Carrickfergus, Co Antrim, BT38 7BR TEL (09603) 65020

One year guarantee, & 14 day money back period.

We accept orders from all government bodies, schools, universities, PLC's etc.
We despatch on receipt of an offical purchase order.

BRDD



Choose any one of the following hits (on disk) FREE:-

Acornsoft/Superior:-Elite (£14.95), Revs (£14.95), Ravenskull (£11.95), Thrust (£11.95), Repton 3 (£11.95), Strykers Run (£11.95), Karate Combat (£11.95), Firebird:-The Sentinel

-When you buy 25 disks for only £19.95 including postage and VAT!

N.B. All disks supplied are superior quality QUADRUPLE density $5^1/4$ " Double Sided, which are best for both 40 & 80 track disk drives.

Nebulae, Dept MH, FREEPOST, Kilroot Park Industrial Estates, Carrickfergus, Co Antrim, BT387BR TEL (09603) 65020

7 Day Delivery. One year guarantee. & 14 day money back period.

SPECIAL OFFERS REE LIBRARY CASE IN CLEAR PLASTIC.

WITH EVERY 10 CK COLOURED DISCS CHOICE OF RED, BLUE, GREEN, YELLOW, WHITE, GREY, OR BLACK DISKS

* UNIMEX STORAGE BOX (80x51/4") SPECIAL LOW PRICE £8.99

LIFETIME GUARANTEE

MAXELL CF2 UNBRANDED IN MAXELL BOX IN PLASTIC BOX WITHOUT BOX UNBRANDED IN CARD BOX WITH FREE LIBRARY CASE WITH FREE LIBRARY CASE NASHIIA CK COLOURED CK BLACK

29.80

DISKETTES ALL SOLD IN PACKS OF 10 DS/DD DS/DD DS/OD DS/HC 135TPI 1.6M

STORAGE BOXES

17.40 13.90

15.90 6.90 8.90 15.90

PRINTER RIBBONS

ALL MAKES STOCKED – EXAMPLES SHOWN AT PRICE PER UNIT EPSON MX80 2.98 MX100 4.99 (Note: MX80 ALSO MATCHES COMMODORE) **CITIZEN 120D 3.74** AMSTRAD 3.32 COMMODORE

MPS801 4.14 MPS803 3.51 MPS1000 3.76 **DIABLO H2 2.09**

80

CK COMPUTER SUPPLIES LTD 0934 418838

UNIT 5, NORSIDE, OLD MIXON CRESCENT WESTON-SUPER-MARE **AVON BS24 9AX**

ORDER NOW FOR EXPRESS SERVICE WRITE OR PHONE, USE REF AU8703

PRICES INCLUDE VAT
JUST ADD £1.50 P&P * VISA/ACCESS ACCEPTED JUST ASK FOR FULL CATALOGUE

TRACKMASTER 31/2" TRACKMASTER 51/4"

CAPACITY

40 9.25

50 70

90 11.51

100 11.48

10.07 10.87 UNIMEX 51/4" 8.99 PHONE FOR FREE ADVICE ON PRODUCT USE & COMPATIBILITY

PHONE FOR FREE ADVICE ON PRODUCT USE & COMPATABILIT

ACORN USER APRIL 1987

FIRST BYTE

*DOTHIS command then ROM 7 will get to execute the *DOTHIS command.

The Master 128 is supplied with a MegaROM and this contains in it various ROMs which are mapped into some of the 16 ROM bank positions as follows:

ROM 15 Terminal

ROM 14 View

ROM 13 Advanced disc filing system

ROM 12 Basic

ROM 11 EDIT

ROM 10 ViewSheet

ROM 9 Acorn disc filing system

ROM 8 Empty

ROM 7 Sideways RAM

ROM 6 Sideways RAM

ROM 5 Sideways RAM

ROM 4 Sideways RAM

ROM 3 Empty

ROM 2 Empty

ROM 1 Empty

ROM 0 Empty

The MegaROM spreads across seven ROM banks from nine to 15 inclusive. The Terminal ROM is in fact quite small and takes up very little space. The majority of the ROM contains the other 'half' of the MOS which is 35k long and also spills over into the View ROM. Of course as far as we are concerned it does not appear in either of these sockets.

The sideways RAM banks are mapped into bank numbers four, five, six and seven leaving banks zero, one, two, three and eight free for ROMs. I would refer readers to the October 1986 Hints and Tips which contain an excellent overview of the ROM socket arrangements. The Master 128 also contains two cartridge slots which occupy ROM positions zero, one, two and three. These can be used as four 16k ROMs – two on each cartridge. Internally there are three ROM sockets. The top most of these is used by ROM number eight, and this generally should be used to hold any other single ROM that you may wish to fit.

The other two ROM sockets are for 32k ROMs and these occupy positions four, five, six, and seven. But this is sideways RAM, I hear you say, and of course you are quite right. However, the Master 128 is designed in such a way as to allow us to use banks four to seven as either RAM or ROM. Normally they are set to act as RAM, however we can convert one or both of them into ROM by changing the settings of links 18 and 19. The important thing to remember here is that when you are using sideways RAM any ROMs plug-

ged into these two sockets will not be seen unless links 18 and/or 19 are changed. If this is the case then it is not possible to use the sideways RAM as sideways RAM.

On the Master Compact things are more straightforward. The MegaROM is in fact half the size, just 64k. ROMs are present in the top three positions only, thus:

ROM 15 Utils

ROM 14 Basic

ROM 13 Advanced disc filing system

Utils, like Terminal on the Master, contains mainly the second half of the operating system. The Master ROM banks nine, 10, 11 and 12 are not used by the Master Compact. Sockets for banks zero, one, two and three appear inside the machine and banks four to seven are only ever used as sideways RAM.

The final 32k of the 128k is split into two. 20k of this supplies the shadow screen memory. In the original BBC micros, memory was always tight because the RAM needed to display the screen was taken from the RAM needed for programs. So with the BBC B+ and Master series micros a special screen memory was supplied so that all the normal RAM is free for programs. Shadow RAM is selected by adding 128 to the normal screen mode. Mode 131 is the shadow RAM version of mode 3. The final 12k is arranged in a special manner that is not normally accessible by the programmer and is used by the

Listing 1 contains numerous lines of data. The data is machine code which will be read by the main program loop into memory and then transferred across into sideways RAM bank six using the *SRWRITE command. When the prompt reappears, press the Control and Break keys together. Typing *ROMS should show that the Memory ROM is present. Typing *MEMORY at any time will provide the following: length of your program and the amount of memory free.

ROMs in the micro as data storage space.

Listing 1 shows the conventional use of sideways RAM, however it can be used as a data storage area. To convert a RAM bank into a storage area we must use the *SRDATA command. To configure all banks as DATA stores we would use:

*SRDATA W

*SRDATA X

*SRDATA Y
*SRDATA Z

The letters W, X, Y and Z can be replaced by four, five, six and seven. However,

letters are used for compatibility with BBC B+128 owners. You do not have to use all four banks at a time, you can use any combination of the four, though it is best to use them in banks side by side so that the data storage area is continuous.

Listing 2 uses all four banks to store several screen pictures which are then displayed one after the other. In normal use sideways RAM begins at address &8000 but when in data storage mode (referred to as pseudo addressing) it is addressed from &O to &FFFF. Listing 2 saves some mode 4 screens to the sideways RAM using the *SRWRITE command. The first two addresses after the command are the start and end addresses of the mode 4 screen (5000 and 8000) in hexadecimal. As each screen is &3000 bytes in length each successive *SRWRITE command has the final address incremented by this amount. The final address then is not really an address but a displacement from the start of the sideways data banks.

There are a few commands built into the Master 128 and Compact micros which act directly on sideways RAM, these are detailed below where did represents the RAM bank number.

*SRDATA (id) Sets sideways RAM bank (id) up to receive data. If several banks are used then the data may flow across from one bank to another. However, the banks defined by SRDATA must be adjacent.

*SRLOAD (sp) (addr) (id) (Q) Loads the named file (sp) into the sideways RAM bank (id) starting at address (addr) which will normally be 8000. If Q is used then program memory will be corrupted.

*SRREAD (addr) (addr) (addr) ((id)) Reads the contents of sideways RAM bank (id) into main memory. The first parameter is the main memory start address, the second is the end address, and the third is the start address in sideways RAM (again normally 8000).

*SRROM id Reverts the specified RAM bank back into its normal sideways RAM operating mode.

*SRSAVE (fsp. (addr) (addr) (id) (Q) Saves the sideways RAM bank (id) to disc/tape using the filename (fsp.). Address parameters are as for *SRREAD.

*SRWRITE (addr) (addr) (addr) (idb)
Transfers data to sideways RAM from the main memory. The first parameter is the main memory start address, the second parameter is the end address and the third the start of sideways RAM.

ACORNIS FINEST **FAVOURITES**

SUPER SUBSCRIPTION OFFER

Subscribe now to Acorn User, Britain's leading magazine for the entire BBC and Acorn range of micros, and we will send you the Acorn User Finest Favourites cassette, worth £3.95, absolutely free.

The Finest Favourites cassette brings together ten of Acorn User's best programs on one cassette. Make music with Tunemaker, cheat at Elite, create curves with Lisajous figures and there are seven more great programs to try!

This offer is only open to addresses in the UK. Don't delay - send off your coupon today!

the	issue and send it to the following address:
NAME	
ADDRESS	
TO THE PERSON NAMED IN	
to the section like	POSTCODE
☐ I enclose my cheque Publishing	/postal order for £17.50 made payable to Redwood
☐ Please debit £17.50 fi	rom my Access/Barclaycard/American Express
Account No:	Expiry date:
SIGNED	DATE

6502 SECOND PROCESSORS

BBC AND ELECTRON ADD 64K OF RAM AND SECOND PROCESSOR POWER FOR UNDER £100

- 30K Basic Programs in all modes
- 3 Times more text in view (mode 3)
- 45K free in Hi-Languages
- 60K available to machine code
- Brings Electron up to BBC Speed
- BBC version comes with Tube **Toolkit ROM**

The PMS second processor plugs into the BBC Tube (plus 1 on Electron), and will run software obeying Acorn Tube Protocols. This includes Basic, the whole View family, Pascal, Comal, Lisp and Hi-BASIC available from P.M.S. For more details contact PMS.

BBC version £99.95 Electron £89.00 (including VAT) and £2 post & packing



PMS MULTI-FONT NTO

Near Text Quality Typesetting Software use with any wordprocessor or language Runs on a BBC B, Master and Compact with ANY Epson Compatible Printer No other hardware required obtain printed output of a quality hither to unknown

Use all these in ONE line of text **MULTIPLE HEIGHTS AND WIDTHS** (up to 16 × normal)

FONTS

· WIDTHS

HEIGHTS

INVERSE and SHADED TEXT LINE SPACING

MICRO-JUSTIFICATION - right and left justifies proportionally spaced text

DRAFT mode – for fast, rough copy for proof reading – but with ALL NTQ features

NTQ comes in a 2 ROM set - one ROM containing the NTQ software and 3 fonts, the other containing a further 4 fonts. Any number of FONT EXTENSION ROMs can be added. USER FONTS created by the definer software supplied can be stored in ANY bank of sideways RAM or burnt into a ROM. NOW OVER THIRTY FONTS AVAILABLE (WRITE OR PHONE FOR FULL LIST)

STANDARD TYPE ISONORM

COMPACTA BLACK BOOK TYPEFACE

ROUNDHAND HITECH

DOTHIC IBIRDAIDWAY IENGIRAVIED BOLD TYPE

WILD WEST

N @ O = 1 1 E

MULTI-HEIGHT MULTI-FONT

MULTI-WIDTH MULTI-PITCH

BACKGROUND

UNDERLINING

INVERSE

As you can see this is not simply another NLQ utility!
"ONLY £34 (inc VAT) + £1 p&p"

NEW - NTQ for printers with only double density graphics E.G. MX80, MT80, Star 10X etc.

ALL NTO features now available for these printers – please specify printer when ordering.

Read what the reviewers are saying about NTQ:-EDUCATIONAL COMPUTING "Despite its power Multi-Font NTQ remains a very easy package to use. This is especially helped by the onscreen help facilities."

"The quality of text is quite outstanding, and I really can't over-estimate the improvement in character it gives to a document." "A comprehensive piece of software which offers a well-chosen selection of fonts"

What more can we say? EDUCATIONAL SITE-LICENSING AVAILABLE

G74 2ES



PERMANENT MEMORY SYSTEMS 38 MOUNT CAMERON DRIVE ST LEONARDS

EAST KILBRIDE



03552-327

(24 Hour)

ACORNFORUM

Mike Barwise considers readers' ideas on sideways RAM, Basic subroutines and Atoms

£20 SIDEWAYS MEMORY TESTING

My notes in December '86 Forum about BBC micro RAM testing have elicited a very interesting submission from Dr Martin Sohnius, who is physicist at King's College, London. His BBC micro is a model B with Watford sideways board, and in the past he has had a lot of intermittent failures.

The routine was developed to pin these down by defining the faulty socket, and it prints out a nice little list of sideways sockets and their contents.

Apart from the neatness of the actual program, Martin has used some really nice techniques. Disliking the Basic assembler, he has used *View* to create the source code. This allows a very free entry layout and results in much clearer source listings. The inclusion of an Auto at the head of the file allows it to be EXECed to create runnable Basic assembler. The positioning of the comments before the assembler statements is a matter of choice: it produces a very neat listing at the expense of comment length. I personally like massive comment headers followed by code, and would recommend experimentation with different layouts.

How does the program work? To make it work at acceptable speed, it performs two 'illegal' calls. Naughty, naughty, but I feel, totally legitimate. If you find a compatibility feature which wrecks your system's usefulness, as long as you document your fiddle well, go ahead and cheat. After all, at the end of the day we are talking about doing jobs efficiently and well, and any serious user of a slightly different machine can find their own solution.

The illegals are both pokes to hardware latches: the &FE30 ROM paging register and the &FF30 to &FF35 Watford board write latches. The Watford latch pokes are unavoidable, and the &FF30 poke saves an enormous amount of time.

The program starts with the highest number socket (15) and ends at socket zero. For each socket, it first finds out whether the socket is empty, and if not what it contains. This is done by analysis of the header. Next, if the socket contains RAM, this is tested exhaustively by toggling each bit twice. There is no long delay between write and read at a given location as would be necessary for dynamic RAM testing,

Listing 1. Prints list of RAMs 560 LDA (ptr), Y 10 REM Sideways RAM t 570 ASL A 580 BEQ empty 20 REM by Martin Sohn 590 BMI language 600 BCS utility 30 REM for BBC B/B+/M 610 .empty /C/E 620 SEC 40 REM (c) Acorn User 630 ROR empty_flag April 1987 640 JSR message 650 OPT FNequs (" 50 : emp 60 osbyte=&FFF4 ") ty 70 osnewl=&FFE7 660 BRK 80 oswrch=&FFEE 670 RTS 90 osrdrom=&FFB9 680 .language 100 latch=&FE30 690 JSR message 110 write=&FF30 700 OPT FNequs (" lan guage ") 120 : 710 BRK 130 temp=&A8 140 old_socket=&AA 720 RTS 150 socket=&AB .utility 730 160 empty_flag=&AC 740 JSR message 170 active=&F4 750 OPT FNequs (" uti 180 ptr=&F6 lity 190 : 760 BRK 200 start=&900 770 RTS 210 780 220 FOR pass=0 TO 2 ST 790 .test 800 LDA #&80 EP 2 230 P%=start 810 STA ptr+1 820 LDY #0 240 E 250 OPT pass 830 STY ptr 840 LDA socket 260 .roms 850 STA active 270 LDA active 860 STA latch 280 STA old_socket 290 LDY #15 870 .test_loop 880 LDA (ptr), Y 300 .main_loop 890 EOR #&FF 310 STY socket 900 STA (ptr),Y 320 STA write, Y 330 STY empty_flag 910 NOP 920 NOP 340 TYA 350 JSR hex_nibble 930 CMP (ptr), Y 940 BNE error1 360 JSR type 950 EOR #&FF 370 JSR test (ptr),Y 960 STA 380 BIT empty_flag 390 BMI no_title 970 CMP (ptr),Y 980 BNE error2 400 JSR title 410 . no title 990 INY 420 JSR osnewl 1000 BNE 430 LDY socket 1010 INC ptr+1 440 DEY 1020 BIT ptr+1 450 BPL main_loop 1030 BVC test_loop 1040 BVS end_test 460 RTS 470 : 1050 .error1 480 .type 1060 EOR #&FF 490 LDA #&AA 1070 .error2 500 LDX #0 1080 STA (ptr), Y 510 LDY #&FF 1090 CLC 520 JSR osbyte 1100 end test 530 STX ptr 1110 LDA old_socket 540 STY ptr+1 1120 STA active 550 LDY socket 1130 STA latch

53

Continued ▶

PLEASE READ THIS WHOLESALE PRICES TO YOU THE USER

WABASH 51/4"	Quantities				
ss/sd 48 TPI ss/dd 48 TPI ds/dd 48 TPI	25 £11 £11.50 £12	£20 £22 £24	100 £38 £41 £45	200 £69 £74 £85	
BASF + FUJI ETC ds/dd 96 TPI 31/6" DS/DD PI AIN	£13	£24	£45	£85	

AIN LABEL DISKS.

We only sell Made in Japan items as they are the best.

10 = £18 Prices inc. VAT & delivery 20 = £30100% Error free certified 50 = £75Lifetime warranty 100 = £135Includes Labels

LOCKABLE DISK BOXES

51/4" 50 Capacity Ref. DD50L	£9.50	Disc for atv.
51/4" 100 Capacity Ref. DD100L	£11.00	10% for 3+
31/2" 40 Capacity Ref. DS40L	£9.00	20% for 6+
31/2" 80 Capacity Ref. DD80L	£11.00	25% for 12+
ACCECCODIEC		

ACCESSORIES

51/4" Head Cleaner and Fluid	£4.00	Disc for qty.
31/2" head Cleaner and Fluid	£6.00	10% for 3+
BBC/Cen printer cable (1m)	£5.00	20% for 6+
Clear perspex printer stand (80 col)	£15.00	25% for 12+

All prices include VAT + delivery

REMEMBER THE PRICES YOU SEE IS ALL YOU PAY. CHEQUE AND POSTAL ORDER TO:



Manor Court Supplies Ltd

80 NORTH ROAD, YATE, BRISTOL BS17 5PR Telephone: 0454 322744

Does your BBC have a one track mind?



CMS Soft Limited.

Unit 18, Industrial Estate Chelmsford Road, Great Dunmow Essex CM6 1XG Telephone (0223) 324141

MULTI-BASIC is what you need

65(C)02 Development System for the BBC Micros.

Why A Relocatable Assembler?

The MIJAS 6502 development system is designed to speed up the writing and testing of BBC assembler software.

It is suitable for games, technical or business software and also language compilers because it is designed to be used like the assemblers on large modern computers.

computers.

The ASSEMBLER produces fully relocatable code modules, one at a time or in groups, which are then built by the LINKER into a complete program together with previously assembled modules selected automatically from libraries.

The LINKER adjusts addresses as a second way program runs exactly as

necessary and your program runs exactly as if it had been assembled in one piece.

Write for details or phone 096289352

Version 3.0 supports revolutionary source level Debug

The new debug Rom allows you to step or run through your program following the ORIGINAL SOURCE CODE

How does it help me?

Only a minimum of new code will be needed for each program, the rest coming from the extensive library supplied or from your own libraries.

Small changes can be made quickly and

Small changes can be made quickly and easily even in the largest program. Editing, assembly time and listing paper are saved. The library supplied covers String handling, File handling, input, output of decimal,hex and binary numbers, simple arithmetic and a new easy subroutine entry procedure with full formal parameter passing by address. Change to the MIJAS SYSTEM and make your BBC really work for YOU.

All this, a debug package, and continuing support must make this the best value for money in the field.

Mijas Software

Helping to bring the new software world to your micro.

Cut out and return the order form below for fast delivery.

To Mijas Software	From :	Please supply:—	Item Price	Number Required	Item Total
PO Box 2 Sutton Scotney Winchester Hants SO21 3LU (AU387)	BBC Model Disk type Sideways Ram?	Linker and Assembler — disk Optional Linker,Assembler Rom New Debug Rom Telcomp II mini card—index I enclose check/PO to	£22 £750 £20 £10 the value	ue of :-	

Also at Mijas, Winchester Rd., Micheldever, Winchester, Hants SO21 3DG

ACORN FORUM

■ Listing 1 continued	the transmit
	1740 BNE no_carry
1140 BCC not_good	1750 INC temp+1
1150 JSR message	1760 .no_carry 1770 JSR oswrch
1160 OPT FNequs ("RAM")	1780 LDA (temp),Y
1170 BRK	1790 BNE messg_loop
1180 RTS	1800 LDA temp+1
1190 .not_good	1810 PHA
1200 LDA #&80	1820 LDA temp
1210 CMP ptr+1	1830 PHA
1220 BNE bad_ram	1840 RTS 1850 :
1230 CPY #0 1240 BNE bad_ram	1860 .hex_byte
1250 JSR message	1870 PHA
1260 OPT FNequs ("	1880 LSR A
") emergenoid	1890 LSR A
1270 BRK	1900 LSR A
1280 RTS	1910 LSR A
1290 .bad_ram	1920 JSR hex_nibble
1300 STY ptr	1930 PLA 1940 "hex_nibble
1310 JSR message 1320 DPT FNequs ("bad R	1950 AND #&OF
AM at ")	1960 SED
1330 BRK	1970 CLC
1340 LDA ptr+1	1980 ADC #&90
1350 JSR hex_byte	1990 ADC #&40
1360 LDA ptr	2000 CLD
1370 JSR hex_byte	2010 JMP oswrch
1380 .space 1390 LDA #ASC" "	2020 : 2030]
1400 JMP oswrch	2040 NEXT pass
1410 :	2050 :
1420 .title	2060 IF FNsum(start, P%
1430 LDA #7	-1) = 1 THEN PROCoscli (
1440 STA ptr	"save RAMTEST 900 B00"):
1450 LDA #&80	END
1450 LDA #&80 1460 STA ptr+1	END 2070 VDU 7
1450 LDA #&80 1460 STA ptr+1 1470 LDY socket	END 2070 VDU 7 2080 PRINT "checksum er
1450 LDA #&80 1460 STA ptr+1 1470 LDY socket 1480 JSR osrdrom	END 2070 VDU 7 2080 PRINT "checksum er ror"
1450 LDA #&80 1460 STA ptr+1 1470 LDY socket 1480 JSR osrdrom 1490 STA temp	END 2070 VDU 7 2080 PRINT "checksum er
1450 LDA #&80 1460 STA ptr+1 1470 LDY socket 1480 JSR osrdrom	END 2070 VDU 7 2080 PRINT "checksum er ror" 2090 END
1450 LDA #&80 1460 STA ptr+1 1470 LDY socket 1480 JSR osrdrom 1490 STA temp 1500 INC ptr 1510 JSR rom_print 1520 LDY ptr	END 2070 VDU 7 2080 PRINT "checksum er ror" 2090 END 2100 : 2110 DEF FNsum (start%, end%)
1450 LDA #&80 1460 STA ptr+1 1470 LDY socket 1480 JSR osrdrom 1490 STA temp 1500 INC ptr 1510 JSR rom_print 1520 LDY ptr 1530 CPY temp	END 2070 VDU 7 2080 PRINT "checksum er ror" 2090 END 2100 : 2110 DEF FNsum (start%, end%) 2120 LOCAL sum%, I%
1450 LDA #&80 1460 STA ptr+1 1470 LDY socket 1480 JSR osrdrom 1490 STA temp 1500 INC ptr 1510 JSR rom_print 1520 LDY ptr 1530 CPY temp 1540 BEQ end_title	END 2070 VDU 7 2080 PRINT "checksum er ror" 2090 END 2100 : 2110 DEF FNsum (start%, end%) 2120 LOCAL sum%, I% 2130 FOR I%=start% TD e
1450 LDA #&80 1460 STA ptr+1 1470 LDY socket 1480 JSR osrdrom 1490 STA temp 1500 INC ptr 1510 JSR rom_print 1520 LDY ptr 1530 CPY temp 1540 BEQ end_title 1550 .rom_print	END 2070 VDU 7 2080 PRINT "checksum er ror" 2090 END 2100 : 2110 DEF FNsum (start%, end%) 2120 LOCAL sum%, I% 2130 FOR I%=start% TO e nd%
1450 LDA #&80 1460 STA ptr+1 1470 LDY socket 1480 JSR osrdrom 1490 STA temp 1500 INC ptr 1510 JSR rom_print 1520 LDY ptr 1530 CPY temp 1540 BEQ end_title 1550 .rom_print 1560 INC ptr	END 2070 VDU 7 2080 PRINT "checksum er ror" 2090 END 2100 : 2110 DEF FNsum (start%, end%) 2120 LOCAL sum%, I% 2130 FOR I%=start% TD e nd% 2140 sum%=sum% + I% * ?
1450 LDA #&80 1460 STA ptr+1 1470 LDY socket 1480 JSR osrdrom 1490 STA temp 1500 INC ptr 1510 JSR rom_print 1520 LDY ptr 1530 CPY temp 1540 BEQ end_title 1550 .rom_print 1560 INC ptr 1570 LDY socket	END 2070 VDU 7 2080 PRINT "checksum er ror" 2090 END 2100 : 2110 DEF FNsum (start%, end%) 2120 LOCAL sum%, I% 2130 FOR I%=start% TO e nd%
1450 LDA #&80 1460 STA ptr+1 1470 LDY socket 1480 JSR osrdrom 1490 STA temp 1500 INC ptr 1510 JSR rom_print 1520 LDY ptr 1530 CPY temp 1540 BEQ end_title 1550 .rom_print 1560 INC ptr 1570 LDY socket 1580 JSR osrdrom 1590 JSR oswrch	END 2070 VDU 7 2080 PRINT "checksum er ror" 2090 END 2100 : 2110 DEF FNsum (start%, end%) 2120 LOCAL sum%, I% 2130 FOR I%=start% TO e nd% 2140 sum%=sum% + I% * ? I%
1450 LDA #&80 1460 STA ptr+1 1470 LDY socket 1480 JSR osrdrom 1490 STA temp 1500 INC ptr 1510 JSR rom_print 1520 LDY ptr 1530 CPY temp 1540 BEQ end_title 1550 .rom_print 1560 INC ptr 1570 LDY socket 1580 JSR osrdrom 1590 JSR oswrch 1600 TAY	END 2070 VDU 7 2080 PRINT "checksum er ror" 2090 END 2100 : 2110 DEF FNsum (start%, end%) 2120 LOCAL sum%, I% 2130 FOR I%=start% TD e nd% 2140 sum%=sum% + I% * ? I% 2150 NEXT I% 2160 =sum% MOD 1000 2170 :
1450 LDA #&80 1460 STA ptr+1 1470 LDY socket 1480 JSR osrdrom 1490 STA temp 1500 INC ptr 1510 JSR rom_print 1520 LDY ptr 1530 CPY temp 1540 BEQ end_title 1550 .rom_print 1560 INC ptr 1570 LDY socket 1580 JSR osrdrom 1590 JSR oswrch 1600 TAY 1610 BNE rom_print	END 2070 VDU 7 2080 PRINT "checksum er ror" 2090 END 2100 : 2110 DEF FNsum (start%, end%) 2120 LOCAL sum%, I% 2130 FOR I%=start% TD e nd% 2140 sum%=sum% + I% * ? I% 2150 NEXT I% 2160 =sum% MOD 1000 2170 : 2180 DEF PROCoscli (str
1450 LDA #&80 1460 STA ptr+1 1470 LDY socket 1480 JSR osrdrom 1490 STA temp 1500 INC ptr 1510 JSR rom_print 1520 LDY ptr 1530 CPY temp 1540 BEQ end_title 1550 .rom_print 1560 INC ptr 1570 LDY socket 1580 JSR osrdrom 1590 JSR oswrch 1600 TAY 1610 BNE rom_print 1620 .end_title	END 2070 VDU 7 2080 PRINT "checksum er ror" 2090 END 2100 : 2110 DEF FNsum (start%, end%) 2120 LOCAL sum%, I% 2130 FOR I%=start% TD e nd% 2140 sum%=sum% + I% * ? I% 2150 NEXT I% 2160 =sum% MOD 1000 2170 : 2180 DEF PROCoscli (str ing\$)
1450 LDA #&80 1460 STA ptr+1 1470 LDY socket 1480 JSR osrdrom 1490 STA temp 1500 INC ptr 1510 JSR rom_print 1520 LDY ptr 1530 CPY temp 1540 BEQ end_title 1550 .rom_print 1560 INC ptr 1570 LDY socket 1580 JSR osrdrom 1590 JSR oswrch 1600 TAY 1610 BNE rom_print 1620 .end_title 1630 JMP space	END 2070 VDU 7 2080 PRINT "checksum er ror" 2090 END 2100 : 2110 DEF FNsum (start%, end%) 2120 LOCAL sum%, I% 2130 FOR I%=start% TD e nd% 2140 sum%=sum% + I% * ? I% 2150 NEXT I% 2160 =sum% MOD 1000 2170 : 2180 DEF PROCoscli (str ing\$) 2190 DIM X% 100
1450 LDA #&80 1460 STA ptr+1 1470 LDY socket 1480 JSR osrdrom 1490 STA temp 1500 INC ptr 1510 JSR rom_print 1520 LDY ptr 1530 CPY temp 1540 BEQ end_title 1550 .rom_print 1560 INC ptr 1570 LDY socket 1580 JSR osrdrom 1590 JSR oswrch 1600 TAY 1610 BNE rom_print 1620 .end_title 1630 JMP space 1640:	END 2070 VDU 7 2080 PRINT "checksum er ror" 2090 END 2100 : 2110 DEF FNsum (start%, end%) 2120 LOCAL sum%, I% 2130 FOR I%=start% TD e nd% 2140 sum%=sum% + I% * ? I% 2150 NEXT I% 2160 =sum% MOD 1000 2170 : 2180 DEF PROCoscli (str ing\$) 2190 DIM X% 100 2200 Y%=X% DIV 256
1450 LDA #&80 1460 STA ptr+1 1470 LDY socket 1480 JSR osrdrom 1490 STA temp 1500 INC ptr 1510 JSR rom_print 1520 LDY ptr 1530 CPY temp 1540 BEQ end_title 1550 .rom_print 1560 INC ptr 1570 LDY socket 1580 JSR osrdrom 1590 JSR oswrch 1600 TAY 1610 BNE rom_print 1620 .end_title 1630 JMP space	END 2070 VDU 7 2080 PRINT "checksum er ror" 2090 END 2100 : 2110 DEF FNsum (start%, end%) 2120 LOCAL sum%, I% 2130 FOR I%=start% TD e nd% 2140 sum%=sum% + I% * ? I% 2150 NEXT I% 2160 =sum% MOD 1000 2170 : 2180 DEF PROCoscli (str ing\$) 2190 DIM X% 100
1450 LDA #&80 1460 STA ptr+1 1470 LDY socket 1480 JSR osrdrom 1490 STA temp 1500 INC ptr 1510 JSR rom_print 1520 LDY ptr 1530 CPY temp 1540 BEQ end_title 1550 .rom_print 1560 INC ptr 1570 LDY socket 1580 JSR osrdrom 1590 JSR oswrch 1600 TAY 1610 BNE rom_print 1620 .end_title 1630 JMP space 1640 : 1650 .message	END 2070 VDU 7 2080 PRINT "checksum er ror" 2090 END 2100 : 2110 DEF FNsum (start%, end%) 2120 LOCAL sum%, I% 2130 FOR I%=start% TD e nd% 2140 sum%=sum% + I% * ? I% 2150 NEXT I% 2160 =sum% MOD 1000 2170 : 2180 DEF PROCoscli (str ing\$) 2190 DIM X% 100 2200 Y%=X% DIV 256 2210 \$X%=string\$ 2220 CALL &FFF7 2230 ENDPROC
1450 LDA #&80 1460 STA ptr+1 1470 LDY socket 1480 JSR osrdrom 1490 STA temp 1500 INC ptr 1510 JSR rom_print 1520 LDY ptr 1530 CPY temp 1540 BEQ end_title 1550 .rom_print 1560 INC ptr 1570 LDY socket 1580 JSR osrdrom 1590 JSR oswrch 1600 TAY 1610 BNE rom_print 1620 .end_title 1630 JMP space 1640: 1650 .message 1660 PLA 1670 STA temp 1680 PLA	END 2070 VDU 7 2080 PRINT "checksum er ror" 2090 END 2100 : 2110 DEF FNsum (start%, end%) 2120 LOCAL sum%, I% 2130 FOR I%=start% TD e nd% 2140 sum%=sum% + I% * ? I% 2150 NEXT I% 2160 =sum% MOD 1000 2170 : 2180 DEF PROCoscli (str ing\$) 2190 DIM X% 100 2200 Y%=X% DIV 256 2210 \$X%=string\$ 2220 CALL &FFF7 2230 ENDPROC 2240 :
1450 LDA #&80 1460 STA ptr+1 1470 LDY socket 1480 JSR osrdrom 1490 STA temp 1500 INC ptr 1510 JSR rom_print 1520 LDY ptr 1530 CPY temp 1540 BEQ end_title 1550 .rom_print 1560 INC ptr 1570 LDY socket 1580 JSR osrdrom 1590 JSR oswrch 1600 TAY 1610 BNE rom_print 1620 .end_title 1630 JMP space 1640: 1650 .message 1660 PLA 1670 STA temp 1680 PLA 1690 STA temp+1	END 2070 VDU 7 2080 PRINT "checksum er ror" 2090 END 2100: 2110 DEF FNsum (start%, end%) 2120 LOCAL sum%, I% 2130 FOR I%=start% TD e nd% 2140 sum%=sum% + I% * ? I% 2150 NEXT I% 2150 NEXT I% 2160 =sum% MOD 1000 2170: 2180 DEF PROCoscli (str ing\$) 2190 DIM X% 100 2200 Y%=X% DIV 256 2210 \$X%=string\$ 2220 CALL &FFF7 2230 ENDPROC 2240: 2250 DEF FNequs (string
1450 LDA #&80 1460 STA ptr+1 1470 LDY socket 1480 JSR osrdrom 1490 STA temp 1500 INC ptr 1510 JSR rom_print 1520 LDY ptr 1530 CPY temp 1540 BEQ end_title 1550 .rom_print 1560 INC ptr 1570 LDY socket 1580 JSR osrdrom 1590 JSR oswrch 1600 TAY 1610 BNE rom_print 1620 .end_title 1630 JMP space 1640 : 1650 .message 1660 PLA 1670 STA temp 1680 PLA 1690 STA temp+1 1700 LDY #0	END 2070 VDU 7 2080 PRINT "checksum er ror" 2090 END 2100: 2110 DEF FNsum (start%, end%) 2120 LOCAL sum%, I% 2130 FOR I%=start% TD e nd% 2140 sum%=sum% + I% * ? I% 2150 NEXT I% 2160 =sum% MOD 1000 2170: 2180 DEF PROCoscli (str ing\$) 2190 DIM X% 100 2200 Y%=X% DIV 256 2210 \$X%=string\$ 2220 CALL &FFF7 2230 ENDPROC 2240: 2250 DEF FNequs (string\$)
1450 LDA #&80 1460 STA ptr+1 1470 LDY socket 1480 JSR osrdrom 1490 STA temp 1500 INC ptr 1510 JSR rom_print 1520 LDY ptr 1530 CPY temp 1540 BEQ end_title 1550 .rom_print 1560 INC ptr 1570 LDY socket 1580 JSR osrdrom 1590 JSR oswrch 1600 TAY 1610 BNE rom_print 1620 .end_title 1630 JMP space 1640 : 1650 .message 1660 PLA 1670 STA temp 1680 PLA 1690 STA temp+1 1700 LDY #0 1710 TYA	END 2070 VDU 7 2080 PRINT "checksum er ror" 2090 END 2100: 2110 DEF FNsum (start%, end%) 2120 LOCAL sum%, I% 2130 FOR I%=start% TD e nd% 2140 sum%=sum% + I% * ? I% 2150 NEXT I% 2160 =sum% MOD 1000 2170: 2180 DEF PROCoscli (str ing\$) 2190 DIM X% 100 2200 Y%=X% DIV 256 2210 \$X%=string\$ 2220 CALL &FFF7 2230 ENDPROC 2240: 2250 DEF FNequs (string\$) 2260 \$P%=string\$
1450 LDA #&80 1460 STA ptr+1 1470 LDY socket 1480 JSR osrdrom 1490 STA temp 1500 INC ptr 1510 JSR rom_print 1520 LDY ptr 1530 CPY temp 1540 BEQ end_title 1550 .rom_print 1560 INC ptr 1570 LDY socket 1580 JSR osrdrom 1590 JSR oswrch 1600 TAY 1610 BNE rom_print 1620 .end_title 1630 JMP space 1640 : 1650 .message 1660 PLA 1670 STA temp 1680 PLA 1690 STA temp+1 1700 LDY #0	END 2070 VDU 7 2080 PRINT "checksum er ror" 2090 END 2100: 2110 DEF FNsum (start%, end%) 2120 LOCAL sum%, I% 2130 FOR I%=start% TD e nd% 2140 sum%=sum% + I% * ? I% 2150 NEXT I% 2160 =sum% MOD 1000 2170: 2180 DEF PROCoscli (str ing\$) 2190 DIM X% 100 2200 Y%=X% DIV 256 2210 \$X%=string\$ 2220 CALL &FFF7 2230 ENDPROC 2240: 2250 DEF FNequs (string\$)

as the sideways RAM is static, so there is no potential refresh failure to test. An interesting question (maybe someone has the answer) is: why do we need the two NOP instructions at 990 and 1000? I have not come up with an answer yet. However, the RAM test is quite unreliable in their absence. After the RAM test, the title of any ROM present is printed, and then the whole process repeats for the next ROM socket.

There are some clever tricks all through the program, which, is really well written: a primary handler calls a succession of independent subroutines. This approaches object oriented rather than structured programming, and is a highly adaptable method.

The conversion works by fooling the processor as to the number base it is working in. The fundamental structure is: isolate a nibble in binary, move to decimal, add 90 (decimal), add 40 (decimal) and move to binary.

Let's follow this through with an example. Say the accumulator contains &2A (hex). The first nibble isolation yields 02. This is the same in binary as in decimal, so on entry to decimal mode it is unchanged, and the previously cleared carry flag stays clear. Now add 90 (decimal), and you get 92. Add 40 (decimal) and you get 132 (decimal) with one in the carry flag and the 32 in the accumulator. On re-entry to binary mode, the bit pattern is retained, yielding &32, which is ASCII 2. Discard the carry and print this, then isolate the second nibble which is &OA. This is more than nine, so on entry to decimal mode, there is a carry across between the low and high digits (decimal). This sets the carry flag. &OA equals 10 (decimal) so add 90 then 40 and you get 140 (decimal) plus the one in the carry flag, or 141. Move to binary mode and you get &41, which is ASCII 'A' ready to be printed. Neat, isn't it?

Martin points out that the RAM test program can only be loaded from the monthly cassette or disc in mode 7, as the source is large due to the comments. Listing 2 is a shortened version of the program.

Another nice one, again by Martin, is a method of verifying the stack RAM without disabling interrupts. I didn't think it could be done this easily!

Martin's routine is:

TSX
TXA
LDX#82F
TXS
PHA
JSR test high ram
PLA
TAX

DISC DRIVE PROBLEMS?

Read/Write errors? Corrupted Data?

Perhaps it is time you had your disc drives checked.

FRC ELECTRONICS specialise in the alignment and repair of all makes and models of floppy disc drives (31/2", 51/4" and 8").

For a fast and efficient service at competitive prices call us on Reading (0734) 479550 or write to us at

FRC ELECTRONICS LTD.,

52 Queensway, Caversham Park Village, Reading, Berkshire. RG4 0SJ.

MASTER ROM

MASTER ROM is a comprehensive sideways ROM/RAM utility program for the BBC B together with the Solidisk 128K or 32K SWR boards It contains an extensive command set for loading, saving, moving, uping and listing sideways ROM images, plus much more. Price £9.99 on ROM or £9.49 for a sideways ROM image on disc.

DISC FINDER

Disc collection getting unmanagable? Then use Disc Finder to record all your discs. Flip through them or search by filename. Easy to use and update. Master compatible. Works with most DFSs. Requires 80 column TV/monitor and dual drives.

State 40 or 80 tracks when ordering.

Price £6.99

Please make your cheque or postal order payable to 'J Freeman' and send to :

Mr J Freeman, Keppelgate, Upper St, Horning, Norfolk. NR12 8NG.

GWENT COLLEGE OF HIGHER EDUCATION

FACULTY OF INFORMATION SCIENCE AND SYSTEMS TECHNOLOGY

PLANNING A HIGH TECH FUTURE

If you are taking your 'A' levels or BTEC examinations this summer and would like to continue your studies in the beautiful County of Gwent, then Gwent College offers the following courses:

B.Eng. Degree in Electronic and Instrumentation Systems

HND in Electronics

HND in Computing

HND in Information Technology

Apply now by writing or telephoning directly to the

Admissions Officer, Gwent College of Higher Education, Allt-yr-yn Avenue, Newport, Gwent NP9 5XA. Tel: (0633) 51525



CARE ELECTRO

GARSTON WATFORD, HERTS. WD2 6NL. Tel 0923-672102

CARE MASTER ROM EXTENDER: Designed to enable users of CARE/Viglen BBC Model B Cartridges.
To now use them on the MASTER micros. The extender is able to take one
8K, 16K or 32K Eprom Cartridge. Including Inter-word.

CARE MASTER FOM CARTEIDGES:

Designed by CARE Electronics to Acom Specifications. Capable of taking upto 2 × 16K Eproms. Including Interword & Spell-Master CARE Cartridges offer 3 options for maximum user flexability. Opt 1 Standard Cartridge; Opt 2 Single Zif: Opt 3 Dual Zif:

Many other types available.


Reference Manual 1
Reference Manual 11
Reference Manual 11
CARE Master ROM Extender
CARE BBC Model B Cartridges
CARE BBC Model B ZIF Cartridge
CARE LOW Profile System (The Original)
[CARE Master ROM Cartridge (Standard)
CARE Master ROM Cartridge (Single Zif)
CARE Master ROM Cartridge (Dual Zif)
CARE Master ROM Cartridge (Dual Zif)
CARE Master Smart Cartridge
CARE Master Swart Cartridge
CARE Master SWE (96K) RAM Cartridge
CARE Master SWE (96K) RAM Cartridge
PHILLIPS Monitor BM75022 Green Hi-Res 20MHz
PHILLIPS Monitor BM75222 Amber Hi-Res 18MHz
HANTAREX Monitor

READYMADE LEADS	
Centronics to Centronics 1.5mt@£	11.50c
Disc Drive Data (Single) 1.2mt @ £	5.75c
Disc Drive Data (Dual) 1.5mt@£	8.05c
Disc Drive Power (Single) 1.2mt@£	3.45c
Disc Drive Power (Dual) 1.5mt@£	4.60c
Printer Cable (BBC to Centronic) 1mt@£	6.90c
Printer Cable (BBC to Centronic) 1.5mt @ £	8.05c
RGB 6-6 pin DIN 1.2mt@£	3.45c
RGB 6-7 pin DIN (Hitachi) 1.2mt@£	5.75c
RGB 6-7 pin DIN (Ferguson) 1.2mt@£	5.75c
RGB 6 pin to SCART (Euro) 1.2mt@£	9.20c
User Port Extension skt to Plug 0.5mt@£	9.66c
1MZ Bus Extension skt to Plug 0.25mt@£	10.31c

EDUCATION ORDERS WELCOME HOW TO ORDER: All prices inclusive of VAT. By Post. Enclose your cheque/P.O. made payable to CARE Electronics, Or use your ACCESS/VISA. Please allow 7 days for delivery. Please add carriage. $a = \pounds 10.35 \qquad b = \pounds 5.75 \qquad c = \pounds 1.15 \qquad d = \pounds 2.30$

SEE US AT THE UMIST SHOW 20-22 MARCH

No Vat @ £ 15.00c
No Vat @ £ 15.00c
@ £ 9.20c
@ £ 1.99c
@ £ 12.65d
@ £ 13.80d
@ £ 13.80d
@ £ 18.86d
@ £ POA
@ £ 89.70a
@ £ 92.00a
@ £ 79.50a **OPEN** 9am-5pm Mon-Fri





EPROM PROGRAMMER

EPROM Programmer inc Software on ROM EPROM Programmer inc Software on Cart @£ 39.10d

POWER SUPPLIES


For use with disc drives Dual BBC Outlets For use with most peripherals Quad BBC Outlets

@£ 34.50b @£ 36.80b

SWITCHING UNITS

1 MICRO INTO 2 PRINTERS

1 PRINTER INTO 2 MICROS



BBC Printer 2 to 1 (Inc Lead)@£	34 50d
BBC Printer 6 to 1	80 50d
Centronics 4 to 1	80 504
Printer 2 to 2 'CPX2 Fully Buffered'	57 50d
USER POR 2 Way & Off Post (Inc Lead)	37 054
User Port 6 way & Off Posn (Inc Lead) @ £	80.504
RGB Switcher 2 to 1@£	33.004
RS423 2 to 1@£	23.000
RS232C 2 to 1 'T' (All lines) @£	23.00d
RS232C 4 to 1 (All lines) @£	57.500
RS232C 2 to 2 'X' (8 lines) @£	80.50d
102020 2 10 2 A (0 III 163)@£	69.00d

MORELY ELECTRONIC PRODUCTS

Teletext Adaptor inc Software on ROM.....@£121.90d Teletext Adaptor inc Software on Disc.......@ £12

NOW INCLUDING ATS (ADVANCED TELETEXT SERVICE)

M/B SOFTWARE (please specify 40 or 80 track)

MASTERCOPY (DFS-ADFS, ADFS-DFS, DFS-DFS, ADFS-ADFS)

ROM Version @£ 14.95c Disc Version

DESIGN 7 - Mode 7 Designer (best we've seen) £

DESFAX Teletext Emulator (The FAX System!!) £ 24.150

ACORN FORUM

TXS

JSR test low ram

where 'test high RAM' is a subroutine that tests RAM as in the main program from &130 to &1FF, and 'test low ram' is a similar subroutine that tests from &100 to &12F.

This routine is really neat. Resetting the stack and pushing the old stack pointer on the stack itself is about as imaginative a dodge as you could think up. The only restrictions are a maximum active stack of 208 bytes, and a limitation of 45 bytes available to the RAM test routines and current interrupts. This covers about six nested interrupts plus a safe margin, or say five plus three nested subroutine calls plus a safe margin, so it should never pose a problem. The interrupts should probably be turned off briefly while the stack pointer is being manipulated.

There are lessons for many of us in this piece of programming: it was obviously thought out first, then keyed in. Most part-time programmers key in from cold, so they never get to work out the details until a vast octopus of code is already throttling them at their desk. Let's see more submissions like this!

Martin Sohnius has asked that this routine be treated as 'public domain'. In other words, it can be freely copied and distributed as long as credit is given, and it is not charged for.

E10 ASSEMBLER AND ATOM EDITOR

Ian Stewart of Liverpool gets ten quid for a neat set of routines which allow Atom assembler and Basic files to be edited on the Bearsoft Editor. The routines are short enough to be preloaded to pages £28 and £29, where they are safe from corruption and can be accessed via the 'Q' command from within the Editor. Ian is actually the first Editor user to submit any routines for use under 'Q',

10Z=£3000 20IF Z?1=255 G.60 30D0 Z?1=32; Z?2=32 40Z=Z+3+LEN(Z+3) 50U. Z?1=255 60Z?2=4 70EDIT

Listing 2. Replaces all line numbers

although the Editor has been around for almost two years!

Disc users could alternatively *RUN them at £2900 directly from disc. The routines themselves are fairly standard, but the use of

them in this context is really well thought out.

The first routine (listing 2) replaces all the line numbers in an assembler program at £3000 with spaces, so that the line numbers cannot corrupt the Editor screen. It should be run before entering the Editor, but after the Editor has been loaded from disc or the Editor ROM has been selected on your paging system. All normal features of the Editor may then be used to modify and correct the assembler file. When you are happy with it, you run the second routine (listing 3) by hitting 'Q' and answering the prompt with the base address of the routine (£2800 or £2900). This exits from the Editor, does a conventional renumber in increments of

10?£202=£D8;?£203=£C9 20!£208=£FE94FE52 30P.\$27,\$12,\$27 40Z=£3000 50A=10;B=10 60IF Z?1=255 END 70DD Z?1=A/255 80Z?2=A;A=A+B 90Z=Z+3+LEN(Z+3) 100U. Z?1=255 110?18=£30;DLD

Listing 3. Exits from the Editor

10, and sets PAGE and TOP to point to the assembler at £3000.

The only proviso is that the program must be written outside the Editor, so that it ends with £OD, £FF. Listing 2 adds the 04 which the Editor needs as a terminator, and the Editor display will show two back-arrow terminators. Don't delete these two ever, or the whole mechanism will fail.

A dummy program of one line could be created in Basic and transferred to the Editor. This would allow all program writing to be done using Editor facilities.

I suppose the same technique could be used on a Word Pack, except that the routines would have to be auto-run from disc, and I'm not quite sure where you would in fact store them. The Word Pack 'Q' command appears to have been an attempt at this kind of feature, but all that copying back and forth did cause some problems.

I am sure lots of you are sitting on little routines and ideas of this kind. You probably think they are too simple to be of interest. As here, though, a neat application is frequently as valuable as an original piece of programming. The actual program is only a tool. To use my favourite (over-worked) analogy: there is a finite limit to the useful alternative shapes of a hammer, but someone who can find a new use for a hammer is pretty clever.

VIRTUAL MEMORY IN ATOM BASIC

My question in the September '85 Forum about how to run Basic subroutines from disc under the control of Basic has elicited two identical solutions. One is from John Cozens of Reading, and the other, from Malcolm Constantine of East Grinstead.

They each get a fiver for coming up with the answer, which makes use of the subroutine labels in Basic.

John's solution is shown in listing 4. The two programs in listing 5 should be saved on disc as OLAY 1 and OLAY 2 before running listing 4.

```
10060S.b

1107£38E=£82;7£38D=3

120REM sets 38D/38E to

PAGE+3

130*LDAD OLAY1

140*DIR

15060S.a

16060S.b

170*LOAD OLAY2

180*DIR

19060S.a

20060S.b

210END

220bP.'"Control Progra

m"';R.
```

Listing 4. Virtual memory program

Malcolm's version is almost the same, which is interesting in a way. Each overlay program is loaded in just before it is used.

```
100aREM program one
110P.$12
120P."Program One"'
130RETURN

100aREM program two
110P.$12
120P."Program Two"'
130RETURN
```

Listing 5. OLAY 1 and OLAY 2

This approach works by using the Atom's ability to execute Basic in a text space it is not pointing to, via a label call. Basic programs of up to a disc capacity in length can be executed segmentally in this way.

These are good examples of the simplicity of neat programming. The definition of the problem is usually a greater task for the programmer than the coding.

It is a pity that most published notes concentrate almost exclusively on coding for individual machines rather than on methods of defining problems.

17 Burnley 208 1177 3 0233

		7	305 Ec
BI	BC MAST	ER SERI	ES
AMB15 M	ASTER		
included in th	r details of bur ne price)		£385 (a)
	IASTER ET		£315 (a)
The state of the s	urbo 65C02 2 Processor		£99 (b) £195′(b)
ADF14 ROM Carts			
ADF10 Econet Mo ADJ22 Ref Manua		Part II	£14 (c)
Part I	£14 (c)	ADJ24 Adv Ref Manual	£19.50 (c)
BBC MASTER		View User Guide	£10 (d)
Dust Cover MASTER	£4.75 (d) ROM/RA	Viewsheet User Gui M CARTR	
TRC1 Two ron	n cartridge	Crixin	£7.95 (d)
TRC4 Four roi TRC 32K Cart	n cartridge ridge ind RAM.		£9.95 (d) £26.95 (d)
		R COMP.	The state of the s
	e packet of te		See page 5
DS Discs	with each CO	MPACT"	for details
SYSTEM 1	640K Drive	& hundled	
software.	OTOK DIIVE	& buildled	£385 (a)
SYSTEM 2 System 1	with a 12'	Hi Res	
Monochrome		THE RES	£469 (a)
SYSTEM 3 System 1 wit	h a 14" Med	Res RGB	
Monitor. Second Drive			£599 (a)
Serial Kit.	KII.		£99 (c) £29 (d)
T.V. Modulat Extension cab		L 5 25 // POT	£29 (d)
Drive (Serial I			12.50 (d)
J	JPGRAD	E KITS	
1.2 OS ROM	£15 (d)	ADFS ROM	£26 (d)
DNFS ROM BASIC II ROM	£17.50 (d) £22.50 (d)	1770 DFS Kit	£43.50 (d)
		Econet Kit CESSORI	£55 (d)
Econet Starter Kit	007 (1)		
Econet Starter Kit Econet Socket Set	000 ()	Econet Bridge Printer Server Rom	£174 (b) £41 (d)
File Server Level II	£75 (b)	10 Station Lead Set	£26 (d)
Master FS Utility Disc	£17.25 (d)		
ACV	V/CO-PR	OCESSO	R
For full specific	cation see page	5	0000
32016 Co-pro Cambridge W			£999 (a) £3450 (a)
X25 Gateway			E2175 (b)
PANOS/PAN 32000 BASIC I	DORA Upg	rade incl	£29 (d)
Co-Processor	upgrade to	10 MHz	
operation for f Time Warp I	Real Time C	lock with	POA (d)
utilities for rea PANOS (for m	ading time ar	nd date in	£39 (c)
32016 Instruction			£25 (c)
WINC	HESTER	R DRIVE	2
Acorn 30 Mbyt			
Server Level III	and ADFS hi	erarchical	520 (2)
iling System.	NOMATIC 2		,529 (a)

P20HD TECHNOMATIC 20 Mbyte Winchester Drive fully compatible with Acorn ADFS and FS III. Includes ADFS Rom. Special reduced price.

£499 (a)

ey Road, London NW10 1E. Igware Road, London W2 T	D Tel: 01 el: 01-72.
P204HP TECHNOMATIC 20 Mbyte Winchester and a 80T DS floppy Drive built in a monitor stand. Includes ADFS Rom. P2041HT As P204HP but also with a 10 Mbyte tape streamer backup unit and backup utilities. Includes ADFS	£849 (a
Rom. TS10 10 Mbyte Tape Streamer Backup	£1,499 (a)
unit with utilities. TFC10 10 Mbyte Pre-formatted Cartridge for use with P2041HT and TS10. WINCHESTER Drive Multiplexer	£695 (a)
TWM2 for two computers. TWM4 for four Computers.	£99 (b) £159 (b)
Details on Technomatic Winchest	ters on page
SECOND PROCESSO	ORS
Universal 2nd Processor TORCH ZEP100 MULTIFORM Z80	£75 (b) £229 (a)
TECHNOMATICs multi format Z80 system includes a FREE Pocket Wordstar + MS/DOS Read/Write Utilit	y £289 (b)
ACORN IEEE INTERF	ACE
Allows BBC computer to control any scientific and technical equipment that conforms to the IEEE488 standard. The interface can link upto 14 compatible devices. Typical	
applications are in experimental work in academic and industrial labs.	£265 (a)
TELETEXT ADAPT	OR
TELETEXT ADAPT Converts your computer into a teletext receiver.	
Converts your computer into a teletext	OR £95 (b) £7.95 (d)
Converts your computer into a teletext receiver. BBC Publications rom for enhanced	£95 (b)
Converts your computer into a teletext receiver. BBC Publications rom for enhanced Teletext Utilities.	£95 (b)
Converts your computer into a teletext receiver. BBC Publications rom for enhanced Teletext Utilities. PRINTERS EPSON LX86 120 cps, variety of fonts, including NLQ, bit image graphics, IBM char/graphics compatible, centronics	£95 (b) £7.95 (d)
Converts your computer into a teletext receiver. BBC Publications rom for enhanced Teletext Utilities. PRINTERS EPSON LX86 120 cps, variety of fonts, including NLQ, bit image graphics, IBM char/graphics compatible, centronics interface standard.	£95 (b) £7.95 (d) £199 (a)
Converts your computer into a teletext receiver. BBC Publications rom for enhanced Teletext Utilities. PRINTERS EPSON LX86 120 cps, variety of fonts, including NLQ, bit image graphics, IBM char/graphics compatible, centronics interface standard. EPSON LX80/86 Tractor Feed EPSON LX80/86 Sheet Feeder EPSON FX800 An enhanced version of FX85. Call for details.	£95 (b) £7.95 (d) £199 (a) £20 (c)
Converts your computer into a teletext receiver. BBC Publications rom for enhanced Teletext Utilities. PRINTERS EPSON LX86 120 cps, variety of fonts, including NLQ, bit image graphics, IBM char/graphics compatible, centronics interface standard. EPSON LX80/86 Tractor Feed EPSON LX80/86 Sheet Feeder EPSON FX800 An enhanced version of FX85. Call for details. EPSON FX1000 An enhanced version of FX105. Call for details.	£95 (b) £7.95 (d) £199 (a) £20 (c) £49 (c)
Converts your computer into a teletext receiver. BBC Publications rom for enhanced Teletext Utilities. PRINTERS EPSON LX86 120 cps, variety of fonts, including NLQ, bit image graphics, IBM char/graphics compatible, centronics interface standard. EPSON LX80/86 Tractor Feed EPSON LX80/86 Sheet Feeder EPSON FX800 An enhanced version of FX85. Call for details. EPSON FX1000 An enhanced version of FX105. Call for details. EPSON EX800 See details on page 5.	£95 (b) £7.95 (d) £199 (a) £20 (c) £49 (c) £329 (a) £449 (a) £409 (a)
Converts your computer into a teletext receiver. BBC Publications rom for enhanced Teletext Utilities. PRINTERS EPSON LX86 120 cps, variety of fonts, including NLQ, bit image graphics, IBM char/graphics compatible, centronics interface standard. EPSON LX80/86 Tractor Feed EPSON LX80/86 Sheet Feeder EPSON FX800 An enhanced version of FX85. Call for details. EPSON FX1000 An enhanced version of FX105. Call for details. EPSON EX800	£95 (b) £7.95 (d) £199 (a) £20 (c) £49 (c) £329 (a) £449 (a)
Converts your computer into a teletext receiver. BBC Publications rom for enhanced Teletext Utilities. PRINTERS EPSON LX86 120 cps, variety of fonts, including NLQ, bit image graphics, IBM char/graphics compatible, centronics interface standard. EPSON LX80/86 Tractor Feed EPSON LX80/86 Sheet Feeder EPSON FX800 An enhanced version of FX85. Call for details. EPSON FX1000 An enhanced version of FX105. Call for details. EPSON EX800 See details on page 5. Colour option for EX800/EX1000. EPSON LQ800 See details on page 5. EPSON LQ1000 As LQ800 but wider carriage for 136 columns.	£95 (b) £7.95 (d) £199 (a) £20 (c) £49 (c) £329 (a) £449 (a) £409 (a) £55 (b)
Converts your computer into a teletext receiver. BBC Publications rom for enhanced Teletext Utilities. PRINTERS EPSON LX86 120 cps, variety of fonts, including NLQ, bit image graphics, IBM char/graphics compatible, centronics interface standard. EPSON LX80/86 Tractor Feed EPSON LX80/86 Sheet Feeder EPSON FX800 An enhanced version of FX85. Call for details. EPSON FX1000 An enhanced version of FX105. Call for details. EPSON EX800 See details on page 5. Colour option for EX800/EX1000. EPSON LQ800 See details on page 5. EPSON LQ1000 As LQ800 but wider carriage for 136	£95 (b) £7.95 (d) £199 (a) £20 (c) £49 (c) £329 (a) £449 (a) £55 (b) £439 (a)

NATIONAL PANASONIC KX P1080	£159 (a)
STAR NL 10 (Parallel Interface)	£209 (a)
STAR NL 10 (Serial Interface)	£279 (a)
INTEGREX Multicolour Inkjet printer. Ideally suited for high res colour VDU	£549 (a)
screen dumps. Quiteness & consistent output are major characteristics. BBC Screen dump for Integrex.	£525 (a) £15 (d)
BROTHER HR20 A new attractively styled printer from	
Brother with unusually quiet operation, host of new fatures, including option to copy current documents. 8K buffer standard	
expandable to 16K. Parallel & Serial ports as standard.	£329 (a)
STAR POWER Type A new low cost daisy wheel printer incorporating STAR technology for innovation and enhancements. Phone for details. See page 5 for details.	£229 (a)
JUKI 6100 Daisy wheel printer	
15 cps, 2K buffer, switchable 10/12/15 cpi proportional spacing, underlining. Parallel interface.	£259 (a)
PLOTTERS	0494194

	and the same of the same of
TAXAN A3 six colour flat bed plotter	£679 (a)
HITACHI 672 GRAPHICS WORKSTATION LINEAR GRAPHICS	£459 (a) £599 (a)
A4S PLOTMATE A4SM PLOTMATE A3M PLOTMATE (Enquire re educational prices for the Linear Graphics plotters)	£370 (a) £450 (a) £569 (a)

Serial Printer Lead (1.2m). £7 (d) PRINTER SHARERS &

BUFFERS

BUFFALO PB Buffer

Parallel buffer for internal fitting to most Epson printers. Simple to instal. PB128 (128K)

Parallel Printer Lead (1.2m).

£6 (d)

PERIPHERAL & COMPUTER SHARERS

High quality switches to allow the user to switch between computers, printers, modems etc. Fully shielded metal cases, all lines fully switched.

	Parallel	Serial
3 Computers to 1 Printer 36v36-3	£69 (c) 25,25-3	£65(c)
4 Computers to 1 Printer 36v36-4	£85 (c) 25,25-4	£75(c)
2 computers 2 Printers X-over 36x36-x	£69 (c) 25,25-y	£65(c)
BBC Cable set 3 to 1 (1m ea)	£32 (d)	£34(c)
BBC Cable set 4 to 1 (Im ea)	£39 (d)	£41(c)
RRC Computer Shore	TCS26	NAME OF TAXABLE PARTY O

BBC Computer Sharer: TCS26

1 computer to 2 printers fitted with BBC cable £22 (c) Paper & Labels

Plain fanfold paper with microperforation:
2000 sheets 9! × 11"
2000 sheets 14! × 11"
2000 sheets 14! × 11"
418.50 (£4.50)
1000 sheets A4
412.50 (£3.50)

Labels/1000

Single Row 3½×1 7/16" Triple Row 2 7/16"×1 7/16"

TECHNOLINE RETAIL SHOPS (24 hr viewdata system) Tel:01-450 9764 Tel:01-208 1177 Telex:922800 (close to Dollis Hill Θ) MAIL ORDER West End Branch West					
London NW10 1ED Tel:01-723 0233 government depts & (c) £1.50 Telex:922800 (near Edgware Road Θ) educational establishments					
DISC DRIVES		MONITORS		EPROMS/RAMS	
Full details on page 6. All drives fitted with MITSUBISHI me 5.25" Single Drives 40/80 switchal TS400 400K/640K		BBC lead incl with all monitors MICROVITEC 14" RGB Monitors Please specify plastic or metal case.		27128-25	£2.50 (d) £2.75 (d) £2.80 (d)
PS400 400K/640K with integral	£129 (b)	Microvitec 1431 Standard Resolution 453 pixels	£179 (a)	RAM/ROM EXPANS	ION
mains power supply 5.25" Dual Drives 40/80 switchal TD800 800K/128OK		Microvitec 1431AP As 1431 + composite video and sound input	£199 (a)	ATPL Board for Model B. Simple to instal, no soldering. Allows expansion to 15 Roms + 2 8K Rams	£37 (c)
PD800 800K/1280K with integral mains power supply PD800P 800K/1280K with	£229 (a)	Microvitec 1451 Medium Resolution 653 pixels	£225 (a)	ATPL Battery backup kit ATPL Board for BBC+ (now in stock).	£16 (d) £31 (c)
integral mainspower supply and monitor stand 3.5" 80T DS Drives:	£249 (a)	Microvitec 1451AP As 1451 + composite video and sound input	£259 (a)	TIME WARP Real Time Clock. Plugs into the user port, battery back up as standard,	
TS351 single 400K/640K PS351 single 400K/640K with integral mains power supply	£119 (b)	Microvitec 1441 High Resolution 895 pixels Microvitec 20" RGB/PAL/	£365 (a)	includes manual, demo software including a diary/planner application program	£31 (d)
TD352 Dual 800K/1280K	£135 (b)	Audio Monitors		Time Warp with PANOS Utilities.	£39 (d)
PD352 Dual 800K/1280K with integral mains power supply	£187 (b)	Microvitec 2030CS Standard Resolution RGB/Comp Video	£380 (a)	MODEMS (All modems are BABT approved)	
PD853 Combo Dual 5.25"/3.5" drive with psu.	£229 (a)	Microvitec 2040CS High Resolution RGB/Comp Video	£685 (a)	See page 7 for modem specifications	
DISC DRIVE MULTIP	LEXER	TOUCHTEC-501	2002 (11)	MIRACLE WS2000V21/23 & BELL stds	£95 (c)
Full specification on page 6. TDM2		Brings genuine touch screen operation		WS2000 Auto Dial Card WS2000 Auto Answer Card	£27 (d) £27 (d)
Dual Unit: 2 computers/one drive unit TDM4	£75 (b)	incl utilities disc with starter and development programs	£239 (b)	WS2000 SK1 Kit	£5 (d)
Quad Unit: 4 computers/one drive unit		PHILIPS 8501 See page 10 for details.	£139 (a)	WS2000 DS1 disc	£10 (d) £6 (d)
3M FLOPPY DISC	S	TAXAN SUPER VISION 620 12" Hi Res/Hi Contrast Option to switch to green/amber		WS2000 Data Cable for BBC MIRACLE WS4000 V21/23	£149 (b)
5.25" Discs in packs of 10 744 40T SS DD 745 40T DS DD See page 745 40T DS DD	£10.00 (d)	BBC/IBM Compatible	£279 (a)	MIRACLE WS3000 V21/23	£295 (b)
745 40T DS DD 746 80T SS DD 750 See puge 10 for details of Special Offer	£12.00 (d) £14.50 (d)	TAXAN SUPER VISION III 12" Super Hi Res and contrast RGB Monitor with option to switch to mono		MIRACLE WS3000 V22	£495 (b)
746 80T SS DD 747 80T DS DD (Add £1 for library case pack	£15.50 (d)	BBC/IBM compatible. MITSUBISHI XC1404	£319 (a)		£650 (b) £395 (b)
3.5" Discs in packs of 10		14" Med Res RGB Monitor Fiched dark screen brilliance and		WS3022 1200/1200 fd WS3024 2400/2400 fd	£570 (b)
80T SS DD 80T DS DD	£20 (d) £25 (d)	contrast control, BBC/1BM compatible	£219 (a)	BBC Data Cable for WS3000/4000	£7 (d)
BULK DISCS		12" MONOCHROME MONITO TAXAN KX1201G Hi Res green etched screen	RS £85 (a)	PROGRAMMING ACCESSORIES/SOFT	
High quality unlabelled discs supplied in packs of 50 in a storage box. The 5.25" discs have the reinforcing hub rings. These discs are guaranteed for		TAXAN KX1202G Hi Res Long Persistence (P39)	£95 (a)	See page 8 for detailed specific Compatible with B, B + and Master	ication
life. 50 5.25" 40 T single sided discs in lockable box.	£35 (b)	TAXAN KX1203A Hi Res amber etched screen	£95 (a)	EPROMER II while stocks last Eprom Ryter (Epromer III)	£89 (b)
50 5.25" 80T double sided discs in lockable box.	£45 (b)	PHILIPS BM 7502 Hi Res green screen	£75 (a)	See page 8 for details. App	rox £119 (b)
50 3.5" 80T double sided discs in lockable box.	£95 (b)	PHILIPS BM7522	£75 (a)	MPROMER META ASSEMBLER	£49 (c) £145 (b)
FLOPPICLENE DRIVE HEAD CLEANING KIT 5.25" Kit with 20 disposable discs	£12,50 (d)	Hi Res amber screen MONITOR ACCESSORIES Microvitec Swivel Base (14" plastic		PORTAL EPROM EMULATOR 128K	£185 (b)
3.5" Kit with 20 disposable discs	£14.00 (d)	monitors) . Philips Swivel Base	£20 (c) £14 (c) £10 (c) £13 (c)	PORTAL EPROM EMULATOR 512K	£285 (b)
DISC STORAGE BOXES DB340 Lockable 40 x 3.5"	£8.50 (c)	Monitor Stand Models B & B + Monitor Stand Master Double Tier stand Models B, B + or		The second secon	£145 (b)
DB550 Lockable 50 x 5.25" DB570 Lockable 70 x 5.25"	£9.00 (c) £11.00 (c)	Master Taxan RGB Lead	£24 (b) £5 (d) £3.50 (d)	EPROM ERASERS UV1B 6 eproms, safety cutout	£47 (b)
DB5100 Lockable 100 x 5.25"	£13.00 (c)	Microvitec Lead Monochrome BNC/Phono Lead	£3.50 (d)	UV1T 6 eproms, timer, safety cutout	£59 (b)

TECHNOMATICE BECCOMPUTERS & FONET CENTRE

BBC COMPUTERS & ECONET CENTRE
17 Burnley Road, London NW10 1ED Tel: 01-208 1177
305 Edgware Road, London W2 Tel: 01-723 0233

	305 I	Edgware Road, London W2	Fel: 01-723	0233	
CAD/DRAWING PAC	KAGES	VIEW PRINTER DRIVER		OXFORD PASCAL	
NovaCad Cad Package for B,		GENERATOR DOT PRINT PLUS	£9 (d)	A fast P-code compiler and stand alor utility (40 or 80 T) Specify B or B+	
B + MASTER & Compact, (See page	9	Full details on page 5 NLO rom for		OXFORD PASCAL	
for specification)		Epson FX/RX, MX and GLP.	£28 (d)	for Master BCPL	£52 (d) £46 (c)
Tracker Ball/Mouse Version (TM	£79 (d)	WORDWISE	£24 (d)	BCPL CALCULATIONS	
TM Version plus Tracker Ball	£119 (c)	WORDWISE PLUS WYSIWYG PLUS	£38 (d)	Supports floating point, fixed poir and fast integer calculations on BCPL	£17 50 (d)
TM Version plus Mouse	£105 (c)		£21 (d)	BCPL STAND ALONE	£17.50 (u)
Plotter Driver Generator	£25 (d)	INTERWORD		GENERATOR	£39 (d)
MOUSE	~25 (d)	(If you own a WW + then quote your reg number and pay £39).	£46 (d)	ACORN LOGO	£46 (c)
AMX MOUSE with SUPER ART	£63 (d)	SPELLMASTER	£49 (d)	LOGOTRON LOGO	£55 (c)
(pse specify B, B+ or Master)		WORDEASE		BBC PUBLICATIONS OPEN LOGO ACORN LISP ROM	£59 (c) £39 (d)
Super Art	£43 (d)		£24 (d)	ACORN FORTH ROM	£39 (d)
PAGEMAKER MAX	£39 (d)	A 16K rom based spellcheck program		ACORN COMAL ROM	£43 (d)
	£17.35 (d)	for View and WW. Contains 2000 words on the rom and 6000		MICROTEXT	
RB2 TRACKER BALL RB2 Tracker Ball with Icon Master	£59 (c)	(expandable to 17000) words on a disc.	£31 (d)	A frame based authoring system from NPL for interactive computer tutoring	1
(for B, B + & Master)	239 (6)	EDWORD II		Disc based	£52 (c)
RB2 Tracker Ball with Cursor Control		(Please specify model B, B+, Compact or Master).	£43 (c)	MICROTEXT PLUS Extended Features incl extra memory	
Rom	£59 (c)	EDWORD II		control of external devices etc. Ron	1
(for Master only)		Applications package SPREADSHEETS	£27 (c)	based. COMMUNICATION	£229 (b)
RB2 Tracker Ball 'Stand Alone'	£47 (c)	VIEWSHEET		TERMULATOR	
for use with NOVACAD & other software)		Acorn's spreadsheet provides 255 cols and 255 rows and will operate in any		Advanced terminal emulator which	
Cursor Control Rom for Master	12 50 (4)	mode. Fully compatible with VIFW		includes VT52/100, Tektronics 4010, teletype emulations.	£25 (d)
	(12.50 (d)	and 6502 2nd processor.	£37 (d)	COMMSTAR	
MIRRORSOFT FLEET STREET EDITOR incl VAT	20.50 (4)	WINDOMATIC Enhances the power of Viewsheet		A highly popular communication rom suitable for all general purpose	
STREET EDITOR INCIVAT	39.50 (d)	See page 9 for details.	£15 (d)	applications (specify B or Master)	£28 (d)
		VIEWPLOT		COMMUNICATOR	
CP/M SOFTWARE	E THE STATE OF	A disc based plotting program. (To be released soon).	£22 (d)	A full 80 col VT100 emulation program with easy to follow screen menus.	£49 (d)
		INTERSHEET	(a)	DATABEEB	
for Acorn, Torch & Multiform Z80 Processors		The new spreadsheet from Computer Concepts with many advanced features		A variety of facilities for use with WS2000 Modem	£26 (d)
MICROPRO's Wordstar Professional	£310 (a)	like 105 col mode, holding several		COMMAND	
		spreadsheets in memory at a time etc. INTERCHART	£39 (d)	(specify the modem type) COMPACT	£34 (d)
	£310 (a)	Graphics package for Intersheet	£27 (d)	ARTROOM (all on 3½" disc)	627 (1)
	£195 (a)	ULTRACALC		FONTWISE+.	£27 (d) £22 (d)
Send for details on our full range of CP/M & PC DOS packages for		BBC Publications very popular and well proven spreadsheet rom includes		FONT EDITOR	£22 (d)
Business, Communications & High Level Languages,		graphics utility disc.	£52 (d)	RAMROD	£37 (d)
Level Languages.		MINI OFFICE II (for BBC B) A suite of inexpensive but extensive		BROM PLUS	£32 (d)
		word processor, database and		MACROM	£37 (d)
BBC SOFT/FIRMWAI	RE		£14.75(d)	BETABASE	£27 (d)
DATABASE MANAGEME	VT	MINI OFFICE II (Rom)	£48 (d)	ACCELERATOR	£49 (d)
SYSTEMS	N1	LANGUAGES		ACORN BASIC EDITOR	£22 (d)
VIEWSTORE		META ASSEMBLER Multi processor Assembler full details	Shope I Fig.	MONITOR (BBC Pub)	£34 (a)
Acorn's database with display in any mode in spreadsheet or user defined		on page 8	CALIFORNIA TO THE PARTY OF THE		£26.50 (d;
card format and powerful sort	027 (4)	TEAM DISASSEMBLER	£145 (b)	SLEUTH	£23 (d)
facilities.Max file size 4Mb	£37 (d)	MACROM A very fast full featured macro		TOOL POY 2 CDC D 1 1 1 1	£31 (d)
STARdataBASE A fast machine code, true random		assembler rom from 6502 and 65C02 codes, allows use of macros from		TOOLBOX 2 (BBC Pub) Manual Cassette	£9.50 (d) £9 (d)
access database. Upto 4000		library disc. Assembly can be disc to		EXMONII	£23 (d)
records/file, 69 fields. Fully menu driven, user defined record layout, very		memory, memory to memory, memory to disc and disc to disc thus allowing		HELP II	£25 (d)
fast searches thru keysearch facility. Mailmerging from VIEW and WW.	£40 (d)	very long source code upto the length		ACORN GXR GRAPHICS ROM specify B or B +	£22 (d)
	£49 (d)	of disc in use. About 3 times as fast as ADE and 30% more economical in		PRINTMASTER	£24 (d)
MASTERFILE II Highly popular economically priced		memory.	£33 (d)	PRINTWISE	£24 (d)
database. 17 fields per record, file size limited by drive capacity only. (40T or		ACORN MICRO PROLOG Logic programming language used		DUMPMASTER supports about 40 printers	£26 (d)
801) Please state DES or ADES.	£17 (d)	extensively in the artificial intelligence field. A simple 'front end' is supplied		FONTWISE PLUS	£17 (d)
WORD PROCESSORS		to make syntax more friendly.	£62 (d)	HERSHEY FONT CHARACTER	
	007	ISO-PASCAL Acorn's full implementation of		GENERATOR ICON MASTER	£18 (d)
VIEW 2.1 VIEW 3.0	£37 (d)	International Std Pascal on 2x16K	040 ()	MOVIE MAKER	£29 (d)
	£56 (c)	roms. ISO PASCAL STAND ALONE	£48 (c)	Two Roms + Cassette	£26 (d)
THE TRUES	£12 (d)	GENERATOR	£30 (d)	ADV TELETEXT UTILITIES ROM	£7.95 (d)

3

TECHNOLINE RETAIL SHOPS For fast delivery telephone (24 hr viewdata system) 15 Burnley Road, London NW10 1ED your order on 01-208 1177 Prices are subject to change without notice (close to Dollis Hill Θ) Using VISA/Acess Card Change without notice Please add carriage (a) £8.00 (Datapost)					
MAIL ORDER West End Branch To Burnley Road Tel:01-723 0233					
BBC PUBLICATIONS EDUCATIONAL SOFTWARE	S.T.: RELATIONSHIPS A Biology program giving a sophisticated simulation exercise based on data from W.H.O. Disc £14 (d)	PRINTER ACCESSORIES			
A series of programs developed in many cases along- side Radio & TV programmes by BBC's Education Department which supplement the classroom studies by moving and colourful displays helping in clear understanding of a variety of subjects. Some packages also include audio cassettes. PRIMARY EDUCATION	S.T.: BONDING A Chemistry program to reinforce & strengthen the concept of bonding of elements. Transfer and sharing of electrons are both shown graphically. Disc £14 (d) S.T.: ELECTROMAGNETIC SPECTRUM A graphical adventure prog to test your knowledge of the electromagnetic spectrum. Disc £14 (d)	EPSON ACCESSORIES: Interfaces: 8143 RS232			
ASTRONOMY: 9-12 years. Phases of moon, eclipses, seasons etc. Includes a game. COMPUTERS AT WORK: The Work Game illustrates two of the most important computer applications: Robotics & IT. Incl. a database prog, word processing tutorial and a robotic control prog. Aud/EC/disc £16 (c)	S.T.: ELECTRONICS IN ACTION Program about using computers for control. Control is achieved by using 6502 assy lang. Prog editor is supplied. Disc £14 (d) S.T.: NEWTON & THE SHUTTLE A interactive prog in 3 parts covering launch to recapture of a satellite to test the knowledge of Newtonian mech. Disc £19 (d)	LX80/86 Tractor Feed			
PICTURE CRAFT An inexhaustible, versatile and flexible suite of programs to design shapes & patterns, paint them and convert them into pictures, puzzles and games. Disc £17 (d)	S.T.: ECOLOGY Simulation program managing a nature reserve to meet a host of individual needs. Disc/EC £19 (d) S.T.: POLYMERS Students run a manufacturing co. and	8331 FX80 + /85 £129 (b) LQ800 £129 (b) LQ1000 £159 (b) EX800 £129 (b) EX 1000 £289 (b) FX 800 £129 (b)			
INTRODUCING GEOGRAPHY 9-13 years. Four exciting graphical adventures include river navigation, flying, mountain climbing and desert crossing. MATHS WITH A STORY 1 Four primary level programs incl symmetry, co-ordinates and prob-	have to choose best materials for their products and compete with a rival co. run by the computer. Disc/EC £19 (d) S.T.: CLASSIFICATION & PERIODIC TABLE A database program for producing different classifications of chemical	FX 1000 £169 (h) Ribbons: RX/FX100/100 + FX105 £7 (d) RX/FX80/80 + FX85 £4 (d) LX80 £4.50 (d) LQ800 £8.50 (d) LQ1000 £10 (d)			
ability for children of wide ranging abilities. MATHS WITH A STORY 2 Similar programs as 1 but covered from a different angle. NUMBER GAMES: Cass £8 (d)	information and presented in any format. S.T.: FOOD & POPULATION Simulation in space of biological aspects of nutrition and food production logistics. Disc £20 (d)	LQ1000 £10 (d) EX800/1000 £7.50 (d) H180 Pen Set (Aqueous/Ball point) £7.50 (d) Dust Covers: FX80 £5.50 (d) TAXAN/Canon KP810 £6 (d) FX100 £7.50 (d) KP910£7 (d)			
6 programs designed to stimulate the mind of an active child of 8 years and upward. Cass/EC £7.50(d) USING YOUR COMPUTER 8/12 years. Introduction to computers using synchronised audio techniques. Total of 80mins of audio & 14 progs. Cass £24 (c)	SEC. SCIENCE: MICROTECHNOLOGY Fundamental concepts of electronics Logic & Resistor Tutors, Servo Cct simulation & a cct design program. SEC. SCIENCE: THE MOLE CONCEPT	HITACHI 672 Plotter Aqueous Pen Set six pens. £18.50 (d) Oil Based Pen Set six pens. £25.00 (d) TAXAN CANON Accessories: RS232 + 2K interface. £63 (d) Ribbon. KP 810/815/910/915. £6 (d) Star Printer			
WORD PLAY An elegant but simple introduction to word processing using animal shapes for editing functions. Fun manual for the children. WORD MOVER Cass £10 (d)	A computer sync. audio program explains definitions of atomic & molecular masses and depicts molar equations. SEC. SC.: UNIFORMLY ACCELERATED MOTION:	NL10 Sheet Feeder			
A simple text editor. Cass £8 (d) SECONDARY LEARNING ADVANCED LEVEL STUDIES: STATISTICS	Illustrates basic eqns., uniform accln, under gravity and an idea of terminal velocity. Disc/AUD/EC £16 (d) VU-TYPE The popular 'Sight & Sound' touch typing tutor with alterable settings. Disc/EC £15 (d)	Serial Interface			
6 progs covering central concepts and principles. Topics include Discrete Data & Binomial Distribution. Eont. Data & Normal Data Distribution. Hypothesis Testing & Confidence intervals, Central Limit theorem & Estimation, Simulations, Correlations	GENERAL VU TYPE PROFESSIONAL An enhanced and expanded version of Vu Type with 63 Pitman approved	Sheet Feeder. £182 (a BROTHER HR20 £18 (d Daisy Wheel. £116 (a Spare Ribbon Nylon. £3.00 (d Spare Ribbon Carbon. £4.50 (d			
and Regressions. ADVANCED STUDIES: GEOGRAPHY 4 progs covering social geography: Traffic & Town planning, drainage & basin management and planning for	exercise. WHITE KNIGHT MK II (Specify it for Master). BATTLEFIELDS A YOU'S LA FRANCE Disc £19 (d) Cass £8.50 (d)	INTEGREX INK JET COLOUR PRINTER Spare Ink Cartridge Black. £9 (d Spare Ink Cartridge Colour. £15 (d Paper Roll. £7 (d Printer Leads: BBC Parallel Lead (1.2m). £6 (d	? ? ?		
industry. INSIDE INFORMATION Designed to introduce IT to young adults. Suitable for use in sec. schools, ITeCs & Adult Educ. Centres. Cass £10 (d) Prog Cass £10 (d) Audio Cass £5 (d) Book £8 (d)	A home study aid for anyone learning French. DEUTSCH DIREKT Disc based vocabulary learning prog with audio cassette to help with Disc/aud/EC.£16 (c)	BBC Serial (Epson) Lead (1.2m)			
SCIENCE TOPICS (ST) S.T.: WAVES A Physics program allows display of waveforms and shows changes caused by different parameters. Disc £14 (d)	pronounciation. MODEM MASTER EPOA Cassette based programs listed above can be supplied on disc at an extra charge of £1.50 per disc and please	2000 sheets 91/2 × 11 60gmssq m. £18.50 (4.50 1000 sheets 141/2" × 11" 60gmssq m. £18.50 (4.50 1000 sheets A4 90gms/sq m. £12 (b Labels/1000: Single Row 31 × 1 7/16" £5.25 (d Triple Row 27/16" × 17/16" £5 (d)		

17 Burnley Road, London NW 10 1ED Tel: 01-208 1177 305 Edgware Road, London W2 Tel: 01-723 0233

ACW443 CAMBRIDGE WORKSTATION

- A complete self-contained workstation with:.

 * NS32016 8MHz Main Processor & 32081
- FP processor.

 20 Mbyte Winchester and one 80T Ds floppy drive.
- detachable keyboard Hi Res RGB Monitor.
- 4Mbyte of on board Ram as standard.
- Languages supplied include: Fortran 77 Pascal, C, Cambridge LISP, 32016 Assembler & 32bit BASIC. Cambridge LISP, 32016
- Utilities on the operating system to cross link programs between different languages, utilities for porting programs to mainframes.
- Phone for detailed leaflet.

32016 CO-PROCESSOR

A second processor that brings genuine 'Mainframe' power to the BBC Computer.

- Interfaces with the BBC through the tube connector.
- NS32016 6MHz CPU & 32081 FP processor.
- 1Mbyte Ram as standard.
- Packaged software includes all the languages and utilities supplied with the ACW Work Station.
- Phone for detailed leaflet.

CPU/FP Upgrade Kit (Acorn recommended) for the Co processor for 10 Mhz operation to enable faster processing. It can be fitted at no extra charge if ordered with the Co Processor.

TIME WARP Real Time Clock with PANOS utility allows screen display of time, day and date within PANOS at anytime and allows these data to be printed on documents. Model B users will find this particularly useful.

512 CO-PROCESSOR

Brings professional software to the BBC Master.

- 10 Mhz 80186 *DOS PLUS.
- GEM Write & GEM Draw.
 'WIMP' Environment with high quality Mouse.
- Runs many 'IBM' programs even 'Flight
- Convert to/from IBM/BBC data.

DOTPRINT PLUS

A uniquely versatile NLO ROM for the BBC Micro.

- Built-in character font generator.
- Built-in view printer driver.
- Supports microspacing for professional justification in View & with disc in Wordwise/Plus.
- True bold print as well as double width.
- 12 character pitch as standard.
- Fully variable pitch and line spacing.
 Suitable for fully 'EPSON' compatible printers with quad-density graphics.

 DOTPRINT PLUS for EPSON FX/RX
- and compatibles
- DOTPRINT DUAL for EPSON MX


MICROJUSTIFIED TEXT

homes of a ruling class whose right to rule was based on the ownership of land. Large estates produced money: perhaps even more important, they supplied people to fight for their

NORMALLY JUSTIFIED TEXT

homes of a ruling class whose right to rule was based on the ownership of land. Large estates produced money; perhaps even more important, they supplied people to fight for their Notice how MICROJUSTIFICATION eliminates 'stretched' spaces between words.

FREE BUNDLED SOFTWARE WITH THE BBC MASTER

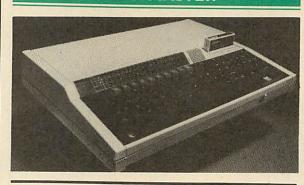

Authorised dealer for "Advanced Interactive Video System"

Please send for details on the equipment and subsidies available to schools

EPSON PRINTERS

Epson have launched a new series of printers to update the FX range. The new FX800 and FX1000 range combines printing versatility and superior technical features with the highest standards of reliability. The features include two NLQ fonts, 10, 12, 17, and 20 cpi, dble ht and dble width, 200 cps in draft and 40 cps in NLQ, tractor and friction as standard, IBM compatible, full graphics, 8K buffer, Parallel interface.

EPSON EX8000/1000

This range offers high speed printing to offer versatility in volume printing with speeds of 300 cps in 12 cpi mode. Four colour printing option is available for these printers.

EPSON LQ800/1000

This range with its 24 pin print head offers the highest standards in letter quality printing at high speeds while maintaining the versatility of dot matrix printers. The hex density graphics capability produces about the best printout any dot matrix printer can produce.

We now supply the Master 128K Computer with educational software which enables immediate use of the computer.

The software package includes:

VU-TYPE DISC

The popular 'sight and sound' touchtyping tutor using colour graphics.

WORDMOVER

A program to help develop the vocabulary of primary school children

WORD PLAY

An elegant and simple program to introduce primary school children to the concept of word processing.

DRAWSTICK

A simple drawing program

LOCO MOTION

An animated game giving the player control of a train travelling around a network of some 50 screens.

PANTRY ANTICS

A fast, amusing and exciting arcade game.

STAR NL10

A 80 col 120 cps printer with fine NLQ at 30 cps offers novel and innovative features. There are no dip switches to set, full control from the front console. Plug in interface cartridge simplifies adaptation to different computers. Friction & Tractor feed as standards. Epson Compatible Graphics.

NATIONAL PANASONIC KXP1080


A high performance low cost printer with full character pitch feature 10, 12, 15 & 17 cpi and proportional spacing in both draft and NLQ mode. 80 column, 100 cps draft and 20 cps in NLQ. Parallel interface and Friction and Tractor feeds as standard. Epson Compatible Graphics.

HITACHI 672

- A3 four colour precision plotter.
- Serial and parallel ports as standard. Produces 'OHP' transparencies as well as plain paper. 'HP' graph
- graphics language or single character commands.

GRAPHICS WORKSTATION

A A3 pen plotter with 0.1mm resolution allows graphs, charts, architectural drawings to be plotted using the 9 predefined plotting instructions or by using a CAD package. The pen mount allows a variety of pen types including drawing pens to be used or the following range of accessories to be fitted.

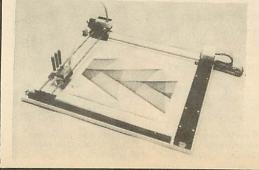

OPTICAL SENSOR

This converts the plotter into a input device and offers a new range of applications: Scan or digitise a picture or a drawing to display or store. Traverse mazes and investigate methods of artificial intelligence. Reliably read bar codes.

DRILL/ROUTER

This will drill holes, machine moulds and cut complex 3-D shapes in a range of suitable materials to a depth of 16mm. Driver software is supplied on disc and an optional application program is available to interface the drill/router to our NOVACAD package.

SCRIBER

The sharp pointed scriber may be used to etch fine line drawings on surfaces such as scraperboard, wax coated copper etc. Full details on request. See page 1 for price.

All accessories available separately if required.

TECHNOLINE (24 hr viewdata system)
Tel:01-450 9764 (14 hr viewdata system)
MAIL ORDER (17 Burnley Road)

London NW10 1ED

Telex:922800

RETAIL SHOPS

15 Burnley Road, London NW10 1ED

Tel:01-208 1177 Telex:922800

(close to Dollis Hill Θ)

West End Branch

305 Edgware Road, London W2

Tel:01-723 0233

(near Edgware Road O)

your order on 01-208 1177
using VISA/Acess Card

educational establishments

government depts &

Prices are subject to change without notice.
Please add carriage (a) £8.00 (Datapost) (b) £2.50 (c) £1.50


(d) £1.00

111111

All prices ex VAT.

49 80 TECHNOMATE:


TS 400

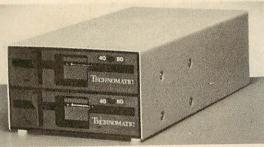

PD 800



PD 800 P

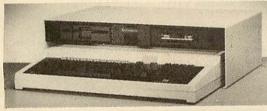


P2041 HT

ALL TECHNOMATIC FLOPPY DRIVES NOW CARRY A TWO YEAR WARRANTY

FLOPPICLENE Disc Drive Cleaning Kit

Floppiclene introduces a positive concept in ensuring continuous high performance of the disc drives by providing an easy and efficient method of keeping the drive heads clean. Use of disposable cleaning discs eliminates the risk always present in reuseable discs of recontamination and abrasion of the sensitive drive heads. Available for both 5.25" and 3.5" drives. Please see page 2 for prices.

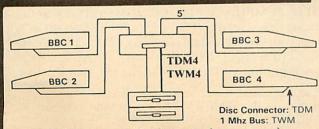

TDM4/TWM4 Quad Unit (up to 4 computers)
TDM2/TWM2 Dual Unit (2 computers)

DISC DRIVES

TECHNOMATIC offers a wide combination of high quality, high performance drives to meet all needs of BBC micro users. Please see our detailed and competitive price list on page 2.

* All Technomatic drives are fitted with quality slim line ultra low power mechanisms capable of single and double density operation and offering very fast track access and head settling times.

*5.25" floppy drives are fitted with 40/80 track switches as standard at no extra cost. The switches are located in the front and clearly marked to indicate the status at a glance.

*The mechanisms are set inside attractively styled, sturdy metal casings painted in BBC beige colour.

*The plinth version drives provide for a neat and compact system installation giving it a more professional look.

*All drives fitted with all necessary leads and are ready for operation on unpacking. The drives with the mains power supply are supplied with a mains lead fitted with suitably fused 13A moulded plug.

*PD853 Combo drive includes a combination of $5\frac{1}{4}$ " (40/80T switchable) and a $3\frac{1}{2}$ " 80 Track Double Sided mechanisms. Complete with mains p.s.u. Ideal for software conversion for $5\frac{1}{2}$ " to $3\frac{1}{2}$ " or vice versa.

Such is our faith in Mitsubishi mechanisms that we offer a two year warranty on our floppy drives

WINCHESTER DRIVES

Mass storage 20 Mbyte drives are available in the following versions:

* P20HD Stand alone.

* P204HP With a single floppy housed in a plinth version case.

* P214TS Top of the range with a 10 Mbyte back up streamer and a single floppy housed in a plinth type casing and supplied with backup utilities.

* TS10 A stand alone 10Mbyte streamer for those who are already equipped with a Winchester and a floppy drive. Utilities for backup can only be loaded from a floppy.

All models are fully compatible with Acorn's ADFS system and include a mains psu and the necessary cable connections.

DISC DRIVE MULTIPLEXER

The cost-effective alternative to networking! A self-contained unit that enables up to four computers to be connected to one single or dual disc drive. No hardware modifications — simply plugs into the computers drive port connectors. No ROMs or other software needed. All DFS commands work as normal. The switching of drives between computers is totally automatic and completely invisible to the user. This unit is ideal for installing in classrooms and other situations, where networking is not planned or necessary, or where costs must be kept low. In many cases software needs to be shared, although full networking complexity and cost is not needed. Several of these units can be connected in series to allow more computers to access the same drives, i.e. two quads connected together will allow 7 computers to share 1 drive. Units are supplied with 5' of cable per outlet as standard. Mains powered.

WINCHESTER DRIVE MULTIPLEXER

A unique addition to our hardware range that allows the sharing of a Winchester between a number of computers. The principle of operation is the same as our highly popular disc drive multiplexers and there is no need for any additional software or hardware modifications. The Multiplexers are available in two versions, a dual unit for two computers and a quad unit for four computers to share a Winchester. Multiplexers are particularly useful for accessing common software and transferring data. Care needs to be excercised for certain types of random access files.

BBC COMPUTERS & ECONET CE 17 Burnley Road, London NW10 1ED Tel: 01-208 1177 305 Edgware Road, London W2 Tel: 01-723 0233

MODEMS

MIRACLE WS4000


- A cost effective intelligent modem that offers the best value for money bringing the world of data communication within easy reach
- Plain English commands make it simple to use, even for the first time user.
- Latest Hayes-type protocol commands, auto dial, auto answer, auto speed seeking. Equalisation model in V23 for line-noise filtering
- Many other options including upgrading to V22 and V22 bis.

MIRACLE WS2000

- comprehensive manually switched World Standard' modem.
- Competitively price with a capability to be upgraded for various options.
- BT approved for V21/V23, 300/300, 1200/75 and 1200/1200 half duplex. Includes BEL103/113/108 standards for
- use outside UK.

Optional extras include (Not BT approved).

- SK1 chip set for computer control.
- User port cable.
- Auto dial Board.
- Auto Answer Board.
- DS1 disc for auto dial facilities on Commstar.

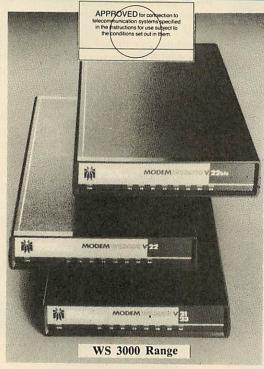

Miracle have introduced two new models in the WS3000 series for users who require a modem for a specific use. Model WS3022 provides 1200/1200 baud full duplex operation whilst only WS3024 provides 2400/2400 baud

Please see page 2 for prices

MIRACLE WS3000 RANGE

- A professional range of intelligent modems with full BABT approval.
- Auto Answer and Auto Dial facilities installed as standard.
- HAYES protocols implemented. Pulse or DTMF 'tone' dialing.
- Plain English command structure simplifies the use of the modem.
- Integral parallel printer port fitted as standard configurable for both input and output for process control applications.
- A line sharing facility to differential between data and voice calls.
- Intelligent speed buffering converts 1200/1200 terminals to 1200/75
- Equalisation mode for line noise filtering. Internal battery back up for storing 63 names, numbers and default settings.
- Upgrade path for 1200/1200 and 2400/2400 and security encryption.
- Applications in the field of graphics and text access, high speed telex, user to user, and user to main frame.

SPECIFICATIONS

WS4000 V2123:

*CCITT V21/V23.

*300/300, 600 and 1200 half duplex, 1200/75.

WS3000 V2123:

*CCITT V21/V23/Bell 103. 300/300, 600 and 1200/75

WS3000 V22:

*As V2123 and also 1200/1200 full duplex.

WS3000 V22 bis: *As V22 and also 2400/2400.

MULTIFORM Z

A unique Z80 2nd Processor with a 'MULTI FORMAT' capability. Zunkage



- Multiform Z80 will run most CP/M 2.2 formats on the BBC.
- 28 different formats including Acorn Z80, RML 380Z & 480Z, EPSON QX, Amstrad, Osborne etc, supplied on the library disc with the utility to create additional formats.
- Emulates the two of the most commonly used CP/M terminals, HAZELTINE 1500 and ADM-3a in addition to the Acorn VDU making installation of most of the software
- Utility to inter convert ASCII text wordprocessed on a standard BBC and under OS/M or CP/M.
- 8271 allows single density CP/M formats whilst 1770 DFS allows both single and double density CP/M formats. Single or dual drive, 40 or 80 track format and SS or DS drives can be used providing the CP/M format matches.
- Dual drive will allow two separate formats to operate simultaneously for data transfer making it ideal for use in environment where machines with different formats are in
- Utility to read and write on IBM PC DOS discs available as an optional extra. Utility will also format a PC DOS disc.
- Multiform Z80 is supplied with a OS/M operating system rom, System disc and a Library disc. Please specify the DFS type and the drive format when ordering.

WYSIWYG PLUS

This new screen/printer utility not only allows you to see on the screen exactly how the text is going to appear on the paper when printed but also simplifies the printer control codes that you need to use to get the different effects.

WYSIWYG + can be used in BASIC or from within most popular word processors like View, Interword & Wordwise Plus,

The printer commands have been simplified to meaningful words so that the user does not have to either remember or keep referring to the printer manual and try to decode the commands to VDU format. For example: *ENGLARGED will display enlarged text on the screen and send the appropriate command to the printer to print in enlarged mode.

Some of the features you could see in WW + or from **BASIC** include:

SUBSCRIPT, *SUPERSCRIPT, *ENLARGED, *BOLD, *EMPHASISED, *CONDENSED (up to 132 characters on screen), *PICA, *ELITE, *GRAPHICS (design your own logos and symbols), *UK, *FRENCH, *US, *TELETEXT (character sets), *BACKSPACE (for overprinting), *DOWNLOAD (new characters or

Simply plug in the WYSIWYG+ rom in your computer and utilise the features built in to your printer with ease and least bother to produce the results you know are possible but not so simple to achieve. No other single package offers this much flexibility and simplicity to get the best from your printer.

WYSIWYG + rom is supplied with a comprehensive manual.

RETAIL SHOPS 15 Burnley Road, London NW10 1ED (24 hr viewdata system)

For fast delivery telephone your order on 01-208 1177 using VISA/Acess Card -

educational establishments

Prices are subject to change without notice Please add carriage

All prices ex VAT.

(a) £8.00 (Datapost)

(b) £2.50

(c) £1.50 (d) £1.00

EpromRyter

(Epromer III) **Eprom Programmer**

An enhanced version of the highly successful EPROMER II providing added sophistication to the eprom programming applications on the BBC computer range. The new software also utilises the extra facilities of the BBC Master computer. The programming methods are 'state of the art' of programming technology for fast, efficient and cost effective operation.

The single rail eproms handled by the EpromRyter are:

2716 2732 2764 27128 27256 27512 27513 27011 2516 2532 2564 (NMOS & CMOS)

- One time eproms P27XXX, 87CXXX etc.
- Also A suffix eproms such as 27XXXA

The software is menu driven, many operations being single key. On screen help clarifying the operation being carried out. Will make the programming process very simple and easy for both specialists and novices alike.

The main features of the programming software are:

- * Device, function and voltage selection from the computer keyboard.
- Continuous display of the options selected.

Orders welcome from

government depts &

- All eproms upto 27512 (64K) programmed in single pass.
- Automatic Intelligent identifier support for eproms able to respond.
- Selectable programming voltage 25/21/12.5V
- 3 programming methods: Normal, Intelligent & Pulse (20 sec for a 27128).
- Serial port protocols supported.
- * Intel HEX, Motorola S, HEX and ASCII protocols supported.
- DFS, NFS, ADFS and Rom Filing System Supported.
- BASIC/Machine Code programming using RFS.
- * Powerful editor with input in HEX or ASCII. * Full editable 64K file.
- * Block move of data within the address range.
- * User can select any section of the eprom from single byte to the full address range to blank check/burn/verify. Facility to program single bytes makes program development/amendment simpler.
- * Multiple loading for ROM Filing System

Some of the above features apply to Master Computers only

EpromRyter interfaces with the BBC through the 1 MHz bus, has a mains power supply and is fitted with a 3M TEXTOOL ZIF socket to provide consistent and reliable service for a long period.

META Version III

"All the good features you would expect to find in a good source code editor are present . . . Meta assembler lives in a different world. It is structured to work with any new processor . . . as new instruction sets can be added . . . as needed . . . has a well featured editor with colour highlighting, a sound modular approach."

Acorn User October 1986

Assembles for over 30 popular processors, including Z80, 6800/01/02/04/05/09/11 etc — and 68000 — using native mnemonics for each processor, eg. LD A, (HL) for Z80 and MOV AO, \$1000 for 68000 etc.

Fully integrated Editor: four field, all search, search/replace,

block copy, delete, move, marked save, load etc. Compatible with Portal Eprom Emulators and Team

Disassemblers. Send object code in Intel Hex, S-Record, straight binary etc. down to discs, RS232, parallel port, Eprom Emulators etc — all during

Over 50 directives included as standard: handling nestable macros, conditional assembly and twenty types of table definition

directives 32 bit labels; 31 character names. Arithmetic and Boolean

arithmetic to 32 bits. Modular source code with numeric and string parameter passing.

Serial communicator area with eight options lines: echo, control

code trap, LF supression/addition etc. Over 500 in use throughout the world in universities and many different industries.

Two 16K Roms, two 80 track discs, A4 ring-band manual, function-key strip.

MICROPROMER

An add on unit for Epromer II enabling the user to program 8741, 8748 and 8749 single chip microcontrollers. Now with the aid of cross assemblers such as META, the user can write code for the above devices and then with the aid of Micropromer program the device.

Simple menu structure with on screen help, i.e. select a function and on the screen will appear details of the function being performed.

Comprehensive error reporting and checking.

Read, verify, blank check, program from 1 to the maximum byte count for the device being used at any address location.

Support for DFS, ADFS and cassette filing systems.

Edit data in Hex or ASCII.

Total control via software, no switches to worry about.

Supplied with user manual and software on diskette.

MPROMER simply plugs into the EPROMER II ZIF socket.

PORTAL EPROM EMULATORS

Emulates 2716, 2732, 2764, 27128, 27256, 27512 eproms at 150ns Access time.

Load at 4Kbytes/second — No "erase" time.

28 pin header plugs into Eprom socket on target system — status monitored on 13 Leds.

Fully software controlled from Meta Assembler.
100 times faster than standard EPROM program/erase cycle.

Fully CMOS compatible; draws no power from target system.

Four portals may be independently programmed off same user-

Complete with all cables, manual and disc.

PORTAL 128 (2716, 2732, 2764, 27128): PORTAL 512 (2716, 2732, 2764, 27128, 27256, 27512).

TEAM DISSASSEMBLER

The third part of the Universal Development System: a Meta labelling dissassembler.

Supports 1802, 8080, 8085, HD64180, Z80, 65XX (includes 65 col, 6511 etc), 68XX (includes 00, 01, 02, 03, 08 etc): updates soon for most of Meta processors.

 Up to 64K of object code translated back into META compatible source code modules: labels automatically inserted on all jump targets, memory references etc.

Pre-editing stage allows marking of object code areas as byte, string, word, long word etc, tables. These areas disassembled into appropriate directives instead of garbage mnemonics.

Reconstituted source code ready for immediate re-assembly by META.

Omniversal search/replace for re-naming arbitary label names with meaningful ones.

No VAT Carriage Code (c) LANGUAGES

| LANGUAGES | 6502 Assi Lang Prog. | £19.95 |
6502 Programming | £13.95 |
8086 Book | £23.95 |
Acorn BCPI User Guide | £15.00 |
Acorn FORTH | £7.50 |
Acorn ISO Pascal Ret Manual £10.00 |
E10.00 | £10.00 |
E10.0 Intro to COMAL Intro to LOGO... £10.00 Micro Prolog Ref Manual ... £10.00 Introduction to Turbo Pascal £14.95

Prog the Micro with Pascal	£8.50
The Supervisor's BBC Micro	£10.95
The UNIX Book	£1.51
Unix User Guide	£19.9:
Understanding Unix	£18.45
BBC MICRO GUIDE BOOKS	
BBC User Guide Acorn	£15.00
BBC Plus User Guide	£15.00
Drawing your Own BBC	
Programs	£6.95
locide Information	La.
Math Progrin RRC Basic	21.9.
The Friendly Computer Book	14.01
Foolbox 2	£10.95
VIA 6522 Book	£4.50

Angelos Viner	
PROGRAMMING UTILITY	
Advanced Sideways Ram	
Ser Guide	£9.9
Advanced User Guide (BBC)	£15.9
Advanced User Guide	.£12.5
Applied Assembly Language	
on the BBC	£9.9
BBC Miero Advanced	
Programming	£9.9
BBC Micro Ref Guide (B Smith)	£10.9
BBC Micro Sideways ROM's	CO. (
	19.
Guide to the BBC ROM	£9.
Beginners Guide to W.P	£7.9
	-

€8.95
£14.95
£10.00
£10.00
£10.00
£9.95
€9.95
£6.95
£16.95

Disc Programming Techniques.	£7.95	
Disc Systems	£6.95	
File Handling on the BBC	£6.95	
Discovering Disc Drives	EPOA	
Practical Disc File		
Techniques	£5.95	
Mastering the Disc Drive	€7.95	
APPLICATIONS:		
Interfacing Proj for BBC	£6.95	
BBC and Small Business	£5.75	
The Software Business	.£5.50	

Disc Book

£3.50


TECHNOMATIC BBC COMPUTERS & ECONET CENTRE 17 Burnley Road, London NW10 1ED Tel: 01-208 1177 305 Edgware Road, London W2 Tel: 01-723 0233

NOVACAD

Computer Aided Draughting for the BBC Micro

- 66 Novacad can drive a plotter to provide drawings of a high quality... Novacad is excellent. It is flexible, genuinely easy to operate without much practice, and a pleasure to use. 37 Beebug December 1986
- A sophisticated CAD package with unique facilities which are generally confined to the professional CAD packages costing thousands of pounds.
- NOVACAD is being used in widely differing fields ranging from leading British industries for producing engineering drawings to Accountants' offices for producing flow charts. Architects,
- 66 Novacad is a professional package, well worth the £90 for the ROM and disc and is expandable to suit your own particular requirements. I would have no reservations if I heard Novacad called, "the best on the market". 33 A&B Computing August 1986

engineers, plumbers, kitchen planners and many other professions requiring easy to use facilities for producing professional quality output are making extensive use of NOVACAD's unique features. NOVACAD is proving to be a invaluable teaching aid in technical schools and colleges simply because of the ease with which it can be used.

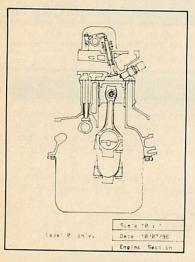

MINIMUM HARDWARE REQUIREMENTS

- Any BBC range computer with Acorn DFS.
- 40 Track single sided single drive.
- Epson compatible dot matrix printer.

With basic BBC B, NOVACAD operates in mode 4 allowing use of any 2 colours. With shadow memory of the BBC + or the Master, it can also operate in mode 0 for higher resolution or mode 1 for allowing use of any 4 colours, and it will provide additional user memory for more complex drawings.

6502 second processor or the Turbo on the Master will also increase the drawing speed considerably.

The major features of NOVACAD are:

- Simple and easy to use with logical command sequence.
- * A large drawing area (approx 15 screens).
- * The ability to create complex icons (upto 500 lines instead of the usual 15 to 20 pixels), store them in a library and recall them at different scales and orientations.
- A zoom facility allowing magnification of up to 20 times to insert finer details.
- * Block copy of shapes on the screen for repetitive use.
- * Text entry at any 90° orientation at any position on the screen.
- * Create multi layer drawing with 8 levels available.
- * Full compatibility with the BBC range with minimal hardware requirements yet having the capability of exploiting the potential of the extra shadow memory or the second processor's memory and speed.
- * Printer routine for Epson 80 and 136 column printers.
- A unique optional facility to output to any BBC compatible plotter.

OPTIONAL EXTRAS

Plotter driver generator is available as an optional extra to configure a plotter routine for any BBC compatible plotter. Preconfigured programs for the popular plotters like Epson HI 80, Hitachi 672, Plotmate, Penman and HP GL. This program allows the drawing to be scaled to the maximum plotter size thus enabling drawing of A2 and A3 sizes to be produced with equal ease. The zoom facility will enable inaccuracies of drawing on the screen to be eliminated.

ROUTCAD, an optional software package for our Graphics Workstation allows for production of shapes drawn using NOVACAD in 3D on suitable material and is ideal for a range of applications including template making and model building.

NOVACAD

is available in two versions

- *BASIC version for cursor control from the keyboard.
- *T/M version for cursor control from the keyboard. Tracker Ball or a Mouse.

NOVACAD package includes a 16K ROM, Utility disc and a comprehensive manual.



WINDOMATIC



All users of Acorn's VIEWSHEET spreadsheet program will be aware of its powerful windowing facility which allows the screen and/or printer to be configured in upto 10 separate windows taken from anywhere in the sheet. They will also be painfully aware of how difficult and time consuming it is to set up a required display. Although VIEWSHEET allows configurations to be saved to the media, it does not have provision for deciphering them.

WINDOWMATIC has been produced with the intention of recitifying these shortcomings and to bring out the very best from VIEWSHEET.

WINDOMATIC provides a quick and easy way to configure screen and printer allowing complicated documents and reports to be set up much more easily. It displays complete text information on all 20 windows and accurate graphic representation of the screen and printer output.

The package includes a screen dump routine for Epson printers and allows use of other printer dump packages. The program is compatible with BBC Master, B + and 6502 and Turbo second processors. It can be entered from VIEWSHEET by use of function keys or it may be run by loading a previously saved window configuration from disc. The program is supplied on a disc with a comprehensive manual.

TECHNOLINE (24 hr viewdata system) Tel:01-450 9764

MAIL ORDER 17 Burnley Road London NW10 1ED Telex:922800 ++++

RETAIL SHOPS +++ 15 Burnley Road, London NW10 1ED+ Tel:01-208 1177 Telex:922800 +++++ (close to Dollis Hill Θ) West End Branch

305 Edgware Road, London W2 Tel:01-723 0233 (near Edgware Road O)

For fast delivery telephone your order on 01-208 1177 using VISA/Acess Card +

Orders welcome from

government depts & educational establishments All prices ex VAT. Prices are subject to change without notice Please add carriage (a) £8.00 (Datapost)

(b) £2.50 [

(c) £1.50 (d) £1.00

A PRICE BREAKTHRO

ECHNOMATIO

- * Cased with power supply and cooling fan
- * 1 Mhz bus extension cable
- * Fully compatible with Acorn ADFS and FS III
- * Fully compatible with S.J. Research file server
- * 12 months warranty

10 Mbyte £399 (a); + 20 Mbyte £499 (a)

+ (This offer valid whilst current stocks last and on orders received before 27th March) Special Adaptor for S.J Research File Server £28


3M FLOPPY DISCS

Individually Tested and Guaranteed for Life

Ever mindful of the catastrophies caused by data loss, 3M make floppy disks that are at least 32% less abrasive than the industry average. Which is why after stringent analogue

WITH EVERY FURCHAST 15-30

DISC DRIVES

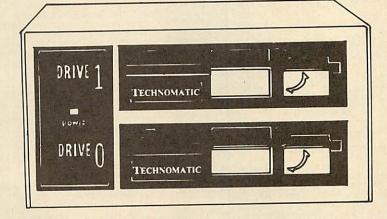

- * 400K/640K capacity perdrive in DFS/ADFS modes.
- * Mitsubishi 80 track double sided ultra low power, fast access mechanisms.
- * The drives are supplied fully cased and with cables ready for connection to a computer.
- * Drives powered from the computer
- * 2 years warranty.

Single Drive £75 (b)

Dual Drive £134 (b)



Vatford Electronic

Jessa House, 250 Lower High Street, Watford WD1 2AN, England Tel: Watford (0923) 37774-40588 Tlx: 8956095 Fax: 01 950 8989



All prices exclusive of VAT; subject to change without notice & available on request.

Credit Card Orders (ACCESS & VISA) Tel (0923) 33383 or 50234 (24 Hours)



BBC MASTER 128K Micro BBC MASTER TURBO 4MHz £395 £493 512K Processor Add on Board "inc. Mouse and GEM package"

£195

By popular demand our retail shop is now open until 8.00pm. every Thursday.

VARIOUS PRINTERS

TATIOOO THINTEN	
EPSON FX800 Printer	£315
EPSON FX105 Printer	£430
 EPSON JX-80 Colour Printer 	£299
● EPSON Hi-80 Printer Plotter	£229
 Hi-80 Refils, set of 4 Pens 	£6
EPSON Paper Roll Holder	£17
EPSON LX86 Printer	£199
● EPSON LX80/86 Tractor Feed	£20
EPSON LX80/86 Sheet Feeder	£49
EPSON FX800 Printer	£315
EPSON FX1000 Printer	TO STATE OF THE PARTY OF THE PA
EPSON EX800 Printer	£425
EPSON LQ800 Printer	£405
Brother HR20 Daisy Wheel	£449
Controller Prints Call	£329
 Centronics Printer Cable to inter 	tace all
the above Printers to BBC	£6

(Securicor carriage charge on printers £7) **RX & FX PRINTER INTERFACES**

Epson interfaces fit inside the printer to allow connection using techniques other than Centronics.

RS232 IEEE 488 RS232 + 2K Buffer RS232 & 8K Buffer

CENTRONICS GLP & Brother M1009 (NLQ) Printers

A major price break-through in NLQ Printers from Watford.

NLQ Printers from Watford.

At last, a low cost full feature printer, supplied complete with Watford's own NLQ ROM (separately at no extra cost). Due to Watford's bulk purchasing power and low margins we can now offer this incredible printer deal direct from the manufacturers to our customers.

Features include, Epson RX Compatible commands, Near Letter Quality print, 50 CPS Draft mode, Centronics parallel interface, Single, Double & Quadruple density graphics modes, Subscript & Superscript, handle up to 9½" wide standard paper, Friction Feed standard, Low cost Tractor feed optional extra, Bi-directional logic seeking. seeking.

> Special Offer £95 (carr £5) Tractor Feed Attachment £12

PRINTER SHARERS

Udeal for School a

the serious changing and	
Connect 3 BBC Micros to 1 Printer Connect 6 BBC Micros to 1 Printer	£60 £99
PRINTER CHANGER	
Connects 3 Printers to 1 Micro (Cables extra)	£65

Acorn-Olivetti JP101 Spark Jet Printer

One of the main problems with most printers is One of the main problems with most printers is that they are hopelessly noisy. How often have you wanted to print something late at night but not done so for fear of waking the children? Also ideal for those working in quiet environments such as libraries, etc. Silence the complaints with the serious solution from Watford at the amazing cost of only

Accepts standard 9½" Paper. £59

Pack of 4 refills £10

JP101 accepts 91/2" standard fan fold paper or single A4 sheets. Tractor & Friction feed supplied as standard - print speed 50 cps.

RS232 Kit for the COMPACT £26

SPECIAL OFFER

EPROMs for BBC's Sideways ROMs.

2764-250nS £2.50 27128-250nS £2.75

RAMs (Low power) for ATPL, WATFORD, etc., Sideways ROM Boards

6264LP (8K) £2.90 2 × 6264LP (16K) £5.80

KAGA/TAXAN PRINTERS (IBM/Epson compatible)

KAGA KP815 Printer Only £239 (carr £7)

KAGA KP915 Printer Only £369 (carr £7)

PRINTER LEADS

Centronics lead to connect BBC micro to EPSON, KAGA, SEIKOSHA, NEC, STAR, JUKI, BROTHER, SHINWA etc. printers.

Standard length (4 feet long)	£6
Extra long (6 feet long)	£8
Compact's Special Centronics Lead	£9
RS232 Cable	P.O.A.
IBM Parallel 1 metre Cable	£12

PRINTER RIBBONS & VARIOUS DUST COVERS

Туре	Ribbons	Dust Covers
BBC Micro		£3.50
BBC Master		£4.00
Brother HR15	£3.00	24.00
FX100	£7.00	£5.25
FX80-MX80-FX85	£4.50	£4.95
RX80	£4.50	£4.50
LX80	£4.00	£4.50
GP80	£4.50	£4.00
GP100-GP250	£5.95	£3.95
Centronics GLP	£4.00	£3.75
KAGA KP810	£5.25	£4.75
CANON PW1080	£5.25	£4.75
Panasonic KX1080	£7.75	£4.75
Microvitec Metal Monitors		£5.50

Our attractive Dust Covers are manufactured from translucent PVC. The seams are stitched and edges are taped to prevent splitting due to continuous use.

Listing Paper (Perforated)

-ioning i apoi (i citotat	cuj
1,000 Sheets 91/2" × 11" Fanfold Paper	£7
2,000 Sheets 91/2" × 11" Fanfold Paper	£12
1,000 Sheets 15" × 11" Fanfold Paper	f9
Teleprinter Roll (Econo paper)	EA

Carriage on 1,000 Sheets £1.50

PRINTER LABELS

(On continuous fanfold backing sheet)

1,000	90×36	mm (Single Row)	£5.00
1,000	90×36	mm (Twin Row)	£4.90
1,000	90×49	mm (Twin Row)	£7.50
1,000	102×36	mm (Twin Row)	£6.25
	Carria	ige on 1,000 Labels	s £1.00

BBC MASTER COMPACT

All Master Compact Microcomputers are supplied complete with an integral 3½" Disc Drive and various educational and professional bundled softwares.

Standard Package £3
System 1 + TV Modulator £3
System 1 + Green Hires Monitor System 1 System 1A £399 System 2 **F469**

System 3 System 1 + Medium Res Colour Monitor f599

SPECIAL OFFER

FREE . . . £80 worth of Software

Gemini's OFFICE MATE & OFFICE MASTER emini's OFFICE MATE & OFFICE MASTEI packages on Disc consisting of: Database, Spreadsheet, Beebplot graphics. Accounts packs: Cashbook, Final Accounts, Mailist, Easyledger, Invoice & Statements, Stock Control and Computer Concepts' popular Interword wordprocessor ROM; WHEN YOU BUY YOUR BBC MASTER COMPUTER FROM US.

Turbo 65C102 Add-on Module BBC MASTER ET	£99
(Econet Terminal)	£315
Econet Module for the Master	£43
ROM Cartridges for Master	£13
	AT) £14
D (AT) £14
A 11 CONTRACTOR OF THE PROPERTY OF THE PROPERT	AT)£19
64K Upgrade Kit for B+	
Acorn 1770 DFS Kit complete	£32
ECONET Upgrade Kit for BBC	£42
ALL ECONET UPGRADES Available	£42
6502 Acorn 2nd Processor package	04
780 Acorn 2nd Processor package	£175
Z80 Acorn 2nd Processor package 32016 Co-Processor	£325
Cambridge Westers	£999
Cambridge Workstation	£3450
ARIES IEEE Interface	£265
Acorn IEEE Interface Complete	£280
Acorn Teletext Adaptor	£95
Acorn Bitstick I	£299
Robocom Bitstick II	£759
Upgrade for Bitstick I to II	£450
Bitstick Multiplotter Driver	£65
(Securicor carriage £7)	

CO-PRO ADAPTOR

Now for the first time you can add the Master Co-processor boards, to your standard BBC model B, or B+. With this brand new launch from Watford Electronics. You can attach any BBC Master Co-processor to the original BBC Micro. Once again Watford forges ahead with a new concept in BBC micro addons. This unique external CO-PRO ADAPTOR, is protected by patent applications.

patent applications.
Use the super fast Turbo Board with your BBC
B, it is much faster than the 6502 2nd processor

B, it is much faster than the 6502 2nd processor it supercedes. With the 512K addon your standard BBC machine achieves IBM PC compatibility at a realistic price running GEM, Lotus 123 and many other programs. To use this addon you require a BBC model B, fitted with DNFS 1.20 or BBC B+ fitted with 1770 DFS 2.20 or greater. Co-processors work exactly as if they were second processors. Master owners may use this interface to add a second Co-processor.

second Co-processor.
Watford, brings power to your BBC at only:

£50.00 (carr £5)



from the prodigious Japanese Stable of Panasonic comes this fabulous new NLQ Dot Matrix Printer

Available NOW at a superbly realistic price, the KX-P1080 perfectly balances features, quality of construction and Value for Money to produce the printer of tomorrow, here today, ready to sweep the current generation of machines

sweep the current generation of machines away.

Ingenious innovation in terms of software control codes permits great flexibility when it comes to defining the print style. A nippy 100 cps of clear Draft text backs up the crisp 20 cps Near Letter Quality text mode, with upto 40 superbly useful downloadable characters. A delightful range of assorted character widths is efficiently supported, with sizes ranging from a broad 5 cpi to petite 17 cpi, EVEN in NLQ mode. Some of the extensive support for serious use includes specialised functions to perform justification, centering and even left and right ranging. Proportional spacing permit even greater freedom when it comes to advanced use. Not only is the full Epson RX compatible control code set implemented, but extra codes have also been added to cater for the NLQ options, etc.

options, etc.

A full 96 ASCII character set is supported, with an extended set of 32 international characters A 1K Print Buffer alleviates much of the wait time normally associated with printing, whilst the bi-directional logic seeking print head takes the quickest route to print as required.

The draft text is implemented with a 9 × 9 matrix, with Near Letter Quality effected by means of an 18 × 18 matrix.

(Price inludes, FREE A 4ft Printer Lead, and a Dump Out 3. Screen Dump ROM worth £35 with every printer purchased from us).

Special Price: £149 (carr. £7) Panasonic RS232 Interface: £39

Panasonic KX-P1092 **Dot Matrix Printer**

Similar to KX-P1080 but has 180cps speed, Draft and NLQ down loadable characters option and is IBM/Epson compatible.

Price £345

Panasonic KX-P3131 **Daisy-Wheel Printer**

A few months ago, we introduced the KX-P1080 to our large and discerning customer base. As a result of the enthusiastic and overwhelming reaction to this versatile dot matrix printer (see above for details), we are now extremely pleased to be able to bring you details of the fabulous KX-P3131 Daisywheel Printer, also from Panasonic. The KX-P3131 printer is the ideal printer for the home user wishing to produce clear, immaculate letters or reports. Ideally suited to the pocket of the home user, costing not much more than a pair of disc drives, this daisywheel printer delivers flawless text at 10, 12 or 15 characters per inch. It also supports proportional print mode. Printing at a respectable 17 characters per second, the KX-P3131 features a capacious 6 kilobytes printer buffer to swallow most printing requirements with ease. For the more demanding user, there is a 32 kilobytes printer buffer option available. Taking paper up to 13.5 wide, the KX-P3131 prints with bidirectional logic seeking, ensuring the minumum time to print your text.

Only £218 (carr. £7)

Single Sheet Feeder Tractor Feed

£195 £90



We stock a range of monitors to suit all needs. Choice of a monitor is a matter of personal taste so we recommend that whenever possible, you ask for a demonstration at our shop. All Monitors are supplied complete with connecting lead.

MICROVITEC 14"

1431 – Medium resolution as used on the BBC television computer programme £175

1451 - High resolution, suitable for word processing in mode 0

1441 – High res, exceeds the capabilities of the BBC micro £359

1431AP RGB + PAL and AUDIO £199 1451AP RGB + PAL and AUDIO £255 £5.50 **Dust Cover for Microvitecs**

KAGA-TAXAN 12"

£85 KAGA KX1201G Hi-res Green Monitor

KAGA KX1202G Long persistence Hi-Res Green Monitor £93 AGA KX1203A Ultra-Hi-Res Amber

f93 Monitor KAGA Vision 2 Hi-res RGB Colour monitor.

Ideal for Wordprocessing

Kaga Super Vision 3, Ultra Hi-res, RGB Colour) Text mode switch allows monochrome text display in Green, Amber, White reverse or White on Blue £309 £9.50 12" Anti-Glare Screens

PHILLIPS 14"

Hi res Colour Monitor £219

ZENITH

"Test Bureau Recommended for use in Education'

12" high resolution monochrome monitor, Ideal for word processing as its green or amber screen is very restful to read. (These are the same professional quality, stylishly finished monitors as used in the larger Zenith PC

Systems.) Green (New Design) Hi-res Amber (New Design) Hi-res £69 £74 LEADS £3 £5 £3 **BNC Lead for Zenith or Philips**

Skart Monitor Lead RGB lead for KAGA N.B. carriage on Monitors £7 (securicor)

SWIVEL BASES

for Video Monitors

By placing your monitor on one of our superb swivel bases, you gain the freedom to adjust the monitor viewing angle to suit your needs. By doing this, you alleviate eye strain and reduce back

for 12" Monitors £10 (carr. £2.50) for 14" Monitors £14 (carr. £2.50)

INCREDIBLE WORD PROCESSING DEAL!!!

Watford Electronics, already renowned for quality products at discount prices, are offering, the truly spectacular BARGAIN OF THE YEAR! A Watford's 32K Shadow RAM Card –


Printer Buffer and the much sought after, Computer Concepts' Inter-WORD, (a very powerful package) All this at an astounding price of:

Only £89 (carr £2)

32K

SHADOW RAM-**Printer Buffer**

Expansion Board



A MUST FOR WORD PROCESSING

Watford Electronics now brings you the latest state-of-the-art MEMORY EXPANSION BOARD state-of-the-art MEMORY EXPANSION BOARD for your BBC microcomputer. Don't throw away your BBC B for a BBC B Plus or BBC Master. Just plug the ribbon cable into the 6502 processor socket, and fit the compact board inside the computer. Immediately you will gain not 16K or even 20K, but a massive 32K of extra

- IMPROVE your WORD PROCESSING system, whether disc or cassette based. Don't wait for a slow printer type in text while printing. TWO JOBS DONE SIMULTANEOUSLY and £100+ saved on a printer buffer.
- "VIEW" Wordprocessor users can now type in letters in 80 columns and have up to 28,000 bytes free 5 times as much as normal.
- In WORDWISE (or WORDWISE-PLUS), preview in 80 columns with the full 24K of text in memory. This product is recommended as an ideal complement by Computer Concepts.
- Combine GOOD GRAPHICS and LONG PROGRAMS. Use the top 20K of the expansion RAM as the screen display memory, leaving all the standard BBC RAM free for programs. Benefit from MODE 0/1/2 graphics and 28K of
- Use the FULL 32K or the bottom 12K of the expansion RAM as a PRINTER buffer for PARALLEL or SERIAL printers, sound channels, RS423 etc. Print large text files while running long graphics programs, and have all your buffer options available as well (*FX15,21,138,145,ADVAL etc). Please note only a 12K printer buffer can be used with Wordwise Purs due to the way they are Wordwise-Plus, due to the way they are
- Ensure COMPATIBILITY with a vast range of hardware (including our ROM board, the ATPL ROM boards, double density boards, second processors), and software (including BASIC, TOOLKIT, VIEW, WORDWISE (1.20+), WORDWISE-PLUS, Music 500's AMPLE). This is because our board, unlike those of our competitors, is connected to the computer by a ribbon cable and has the power consumption of a couple of ROMS! a couple of ROMs!
- Achieve EASY OPERATION with ROM based software. A large range of commands is available for machine code and BASIC users, including some useful *HELP messages, and a comprehensive manual is supplied free.
- Unique facility to turn ROMs off and on again. Unlike all other ROM managers, this feature does not use 'unofficial' memory. Two bytes of normally user-inaccessible memory on the RAM card are used to ensure ROMs are disabled WHERE OTHER ROMS FAIL.

Only £59 (carr £2)

(Price includes a comprehensive manual and the ROM)

Continued



Mark II Light Pen

You no longer have to fiddle with the brilliance control or work in the shade as this NEW Mark II Light Pen is totally insensitive to local lighting conditions. It only operates on high frequency light from the TV or Monitor. The red LED Indicator on the Mk II pen, lights up when valid video data is available. Your program can have access to this signal allowing computer verification of target for high res drawing. The conveniently located switch on the pen body allows the computer to ignore any stray signals. Supplied complete with the sophisticated PEN-PAL Software on Cassette or Disc. Please specify.

Special Offer Price: £15

THE EPSON RX-FX-KAGA PRINTER COMMANDS REVEALED (BOOK)

So you bought yourself a new printer, because the salesman in the shop showed you how clever it is and impressed you with all sorts of printouts to show its capabilities – he may even have offered you a special price.

However, now that you have got it home and cannected it to your BBC microcomputer, you are wondering how to make it perform these magical tasks. The manual seems to give no clues, and when you type in the example programs, the computer throws the LPRINT statements back in your face.

your face.

Now what do you do, when this £400 piece of high technology refuses even to move its head, and you have stayed up until 2 in the morning with copious supplies of coffee, desperately trying to print something out. Once again, Watford Electronics comes to your help with our new book entitled 'THE EPSON FX-KAGA PRINTER COMMANDS REVEALED'.

This book describes in plain, easy to understand English, how to use and make the most of your KPB10, Canon PW1080A or any Epson FX80 compatible Printer with the BBC Micro, both from Basic and Wordwise. It describes in detail how to obtain the maximum in graphics capability from your printer and includes full indexes allowing you to cross index the numerous commands. Every command is explained in detail, with an accompanying BBC Basic program and an example of its use from Wordwise.

Superb Value at £5.95 (No VAT)

NOW WITH EXTRA FEATURES AT NO EXTRA COST Watford's latest DFS 1.44

Incorporates Acorn's Official Tube Host Code so that those with 2nd processors no longer need to waste a ROM socket on the DNFS.
 Option to DOUBLE the speed of BPUT and BGET.

If you already have the Watford Electronics DFS and wish to incorporate these new facilities ten simply return your existing DFS ROM to us together with £5 remittance for an upgrade. Please pack the ROM securely and address the package to our Upgrades Dept.

WATFORD's & ACORN's SINGLE DENSITY DFS

Watford's popular and widely acclaimed DFS has now been available for four years, and has gained a large following amongst serious users of the BBC Micro. Owners of Acorn or any other standard DFS can upgrade to our "Ultimate" DFS merely by replacing their DFS ROM. See below for this upgrade. (P.S. Watford's highly sophisticated DFS is fully compatible with Acorn DES)

PRICES

Complete Disc Interface Kit including DFS ROM and

WATFORD'S DOUBLE DENSITY **DFS INTERFACE**

The DDFS from Watford Electronics represents a new standard in DFSs for the BBC micro. This is a double density version of our popular single density DFS, and combines all the features of this powerful DFS with the advantages of a system that gives 80% more storage per disc in double density mode. P.S. — Please note that not all DDFSs are capable of providing either the full 80% storage increase, or of allowing a file the full size of the disc — Ours allows both of these! Operates both in Single & Double Density modes.

The typical piece of games software these days is provided upon a protected disc. In order to work on any double density system (including the others on the market) a protected piece of software needs to make calls through the OSWORD &7F routines. To ensure compatibility, the Watford DDFS features probably the most comprehensive and powerful 8271 emulation ever written for a double density system.

PRICES
Complete DDFS Kit incl. fitting instructions £46
DDFS Manual (no VAT) £6.95
We will exchange your existing Single Density
DFS Kit for our DDFS Unit at £29

BBC MICRO BUSINESS/ WORD/PROCESSING PACKAGE

A complete word-processing package (which can be heavily modified to your requirements, maintaining the large discount). Please telephone or call in at our retail shop to discuss your particular requirement and a demonstration.

EXAMPLE PACKAGE

BBC Master 128K Micro, View wordprocessor, Viewsheet, Basic Editor, Terminal Emulator, Twin 800K 40-80 track double sided Disc Drives, Zenith Hi-Res green monitor, Panasonic KX-P3131 professional quality Daisy Wheel printer, Gemini Database, Spreadsheet, Beebplot Graphics, Cashbook, Final Accounts, Mailist, Easiledger, Invoice & Statements, and Stock Control packages on disc with manuals. packages on disc with manuals.

Only £899

A Low Cost wordprocessing package: Same as above except, a single disc drive instead of a twin and Olivetti Spark Jet Printer instead of Panasonic.

Only £625

MYSTERIES OF DISC DRIVES & DFS REVEALED (BOOK)

Are you tired of faulty cassettes, and lengthy loading times? Do you want to upgrade your BBC micro to take discs but you get tied up in the plethora of jargon surrounding the choice and use of these systems.

For instance, what is the difference between single and double density formats, how can you use a 40 track disc on an 80 track disc drivel What is the difference between a DFS and disc interface kit? Should you acquire a single Disc drive or twin[What does 48 TPI and 96 TPI discs mean? These are just a few of the questions you may have asked yourself and never found the answer or maybe you have yet to encounter these questions.

Now the mystery of buying a suitable interface and disc drive for your BBC micro is revealed in Watford's new book entitled 'MYSTERIES of DISC DRIVES & DFS REVEALED'. It describes in fine detail, yet remaining very readable to the beginner, how disc drives operate, the type of interfaces available, which type of discs to use on a disc drive and how data is stored on the discs.

£5.95 (Book No VAT)

DISC ALBUMS

Attractively finished in antique brown leather look vinyl. Stores upto 20 Discs. Each disc can be seen through the clear view pocket.

£4

EXTENDED WARRANTY

Now Available For BBC, Masters, Disc Drives & Monitors. Write or phone for further details

FLOPPY HEAD CLEANER KIT

The heads in floppy drives are precision made and very sensitive to dirt. The use of a cleaner Kit is a sensible precaution against losing valuable data. It is recommended to clean the drive head once a week. It is very simple to


ANTISTATIC LOCKABLE DISC STORAGE UNITS

Gives double protection –

Strong plastic case that affords real protection to your discs. Antistatic helps avoid data corruption whilst in storage. The smoked top locks down. Dividers and adhesive title strips are supplied for efficient filing of discs.

M35 - holds upto 50 discs M85 - holds upto 95 discs





PLASTIC LIBRARY CASES

FOR 51/4" DISC STORAGE holds 10 Discs.

£2.00

DUST COVERS (For our Disc Drives)

Single CLS (without PSU) £3.20 Twin CLD (without PSU) £3.85 Single CS (with PSU) £3.95 Twin CD (with PSU) £3.90

Quality Disc Drives from Watford

To help you decide which drive is the most suitable for your needs (and your pocket!), we have produced the table below.

The first capacity given in the first column indicates capacity in single density mode. That within the brackets is the capacity in double density mode. All disc drive type numbers start with the prefix "C".

The tinting on some of the boxes is used to indicate which Drives are 40 track (non-tinted) and which are 80 track (tinted). All our drives are of Japanese manufacture. All our 80 track drives are already fitted with a 40-80

All our Disc Drives are Double Sided and will operate in both Single and Double Density modes. Extensive experience of the usage of disc drives suggests that the JAPANESE drives currently represent about the best in terms of speed, reliability and overall "elegance" available for the BBC Micro.

Various other "manufacturers" of disc drives for the BBC micro (more accurately, "packages" label other manufacturers drives with their own name). We buy the high quality JVC and Mitsubishi drives in large quantities directly from the manufacturers, package them and sell them at "dealer" prices direct to the public.

If you look around the popular BBC micro press, you will find that the prices we quote for the top quality, new slimline disc drives are, virtually without exception, some of the best around. These prices, coupled with the backup of one of the country's largest distributors of BBC peripherals provides a


superb deal.

Unless you anticipate using dual drives in a fully expanded BBC system for long periods of time with little ventilation, then we suggest that our range of "CL" disc drives without the PSU (Power Supply Unit) would be quite adequate (extensive tests within our workshops have confirmed this). All drives are supplied complete with a SPECIAL UTILITIES Disc, Cables and Plugs. The Drives with power supply have a mains moulded plug for safety purposes. Ideal for Schools & Colleges. We are now able to supply all single disc drives with Power Supply, in either single or dual case. (Dual case has a twin data cable and a power supply capable of driving two disc drives) allows easy expansion to a dual drive unit, at a later date. Prices stated in the pricing boxes below for single drives is for a single drive in a standard single case. Single drive in a dual case cost an extra £5. (At Watford we anticipate your needs of tomorrow, not just today)! anticipate your needs of tomorrow, not just today)!

When using a BBC Micro, most people find themselves short of desk space. The Watford's BBC Micro plinths form an ideal way of recovering some of this precious space) your BBC, Disc Drive and Monitor can all occupy the same vertical footprint and still be comfortably situated. With the Watford Double plinth, your Disc Drive is mounted vertically at one side, leaving a very valuable area directly in front of you for such useful items as spare discs, pen, paper, reference manuals, etc. Follow the trend with Watford plinth. (Turn to the 10th page of our advert for the Plinths).

P.S. All our 5½" Disc Drives are compatible with the Compact Micro. All you require is the special Compact Disc Drive Cables designed by us.

Cable to connect 51/4" Disc Drives to BBC Compact Single £9 Twin £12
Special Cable to connect 3½" and 5¼" Disc Drive to BBC Compact £13

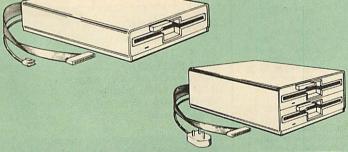

Drives without P.S.U. Drives with P.S.U.						
Compaign	Drives without P.S.U.		Drives with P.S.U.			
Capacity	Single	Twin	Single	Twin		
200K (360K)	CLS 200 £95		CS 200 £108			
400K (720K)	CLS400S £96	CLD 400 £180	CS 400S £109	CD400 £200		
800K (1.44M)		CLD 800S £183		CD 800S £204		

● TWIN Disc Drive Case, complete with Power Supply & Cables £43

Securicor carriage on Disc Drives £5 to £6

Prefix C = Cased Drive

Suffix S = 40-80 Switchable

L = Less PSU S = Single D = Double

CLS400S = Cased drive, Less power supply unit, Single 400K, Switchable (40-80 track).

3M - DISKETTES

Top quality 3M – SCOTCH Diskettes from Watford Electronics (Your 3M Appointed Distributors). All our discs carry a lifetime warranty. These discs are quiet in operation and insert positively with their reinforced hub rings. Boxes of 10 supplied complete with self stick disc labels and write protect

■ 10 × 5¼" S/S D/D 40 Track Diskettes	£10
10 × 5½" D/S D/D 40 Track Diskettes	£12
10 × 5¼" S/S D/D 80 Track Diskettes	£15
10 × 51/4" D/S D/D 80 Track Diskettes	£15
Hi-Density 10 × 5¼" 1.6M D/S D/D for IBM	£32
● 10 × 3½" S/S D/D 40/80 track Discs	£20
● 10 × 3½" D/D D/D 40/80 track Discs	£24

TOP QUALITY 31/2" & 51/4" DISKETTES

To complement the range of quality discs and disc drives that WE already sell, WE are now supplying some special offer packs of 10 high quality discs. Each Disc has a reinforced hub ring and carries a lifetime guarantee. These are supplied complete with selfstick labels and packaged in an attractive plastic library disc box to protect them from damage. We strongly recommend these Discs. recommend these Discs.

DON'T SETTLE FOR LESS, BUY THE BEST

● 10 × M3 3½" D/S D/D 80 Track Discs	£20
● 10 × M4 5¼" S/S D/D 40 Track Discs	£9
■ 10 × M5 51/4" D/S D/D 40 Track Discs	£11
● 10 × M7 51/4" D/S D/D 80 Track Discs	£14
2" Double Sided Discs	£3 each

Special BULK OFFER on 51/4" DISCS

(Supplied packed in plastic storage Units) (Lifetime warranty on Discs)

BULK PACK DISCS in lots of 100

Type	S-S 40T	D-S 40T	D-S 80T
 Without Sleeves 	£46	£49	£72
With Sleeves	£49	£52	£75

ACORN WINCHESTER DRIVES

Suitable for direct connection, via the 1MHz bus, to any BBC running ADFS. These Acorn Winchester disc drives are fast and extremely reliable. Each Winchester comes complete with the Level III Econet File Server software.

10 Megabytes £1050; 30 Megabytes £1549


WATFORD'S WINCHESTER DRIVES

20 Megabytes with ADFS 40 Megabytes with ADFS

£635

WINCHESTER WORKSTATION

20 Megabyte Winchester, plus a Tape Streamer and a 400K Floppy Drive all housed in a plinth with cooling fan £149

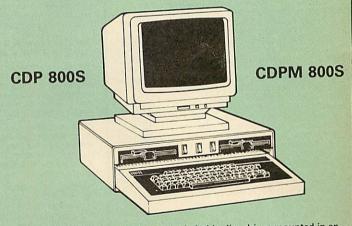

Twin 800K Double sided 40-80 track switchable disc drives mounted in an attractively finished Beige colour plinth for the BBC Micro. Supplied complete with integral power supply, cables and Utilities disc. The switches are mounted on the front panel for ease of use.

CDP 800S for BBC Micro £210 CDPM 800S for Master £225

ACORN's Special Twin 800K Disc Drives

Specially mounted side by side in a Master Plinth. Supplied complete with Manual and Cables. Plugs directly to the Master Computer. RRP £250 Our Price: Only £199 (carr £7)



Harness the full potentials of your Epson RX & FX Printers. Impress your friends and business colleagues with the quality of your letters and printed material with Watford's very simple to use EPSON NLQ! (Near Letter Quality) ROM. Suitable for FX80, RX80, RX80F/T, FX100.

Look at the features:

Simply type *NL080-100 and a single VDU code to use NLQ print.

NLQ is then available without any modifications from BASIC, WORDWISE, VIEW (with NLQ DRIVER) or virtually any other program or language.

Single codes select PROPORTIONAL type (yes even on the RX80) ENLARGED type; UNDERLINED type. These features can be used seperately or in any combination.

Full UK character set) Standard 'pica size') Proportional spacing; Enlarged; Underlined; Normal type.

Normal type.

The NLQ ROM is supplied complete with comprehensive manual.

P.S. NLQ ROM is compatible with the Torch Z80 system and can be used from within the Perfect Writer software.

Only: £25

VIEW PRINTER DRIVER for NLQ ROM

This specially written printer driver has been designed to allow View access to the full features of our NLQ ROM.
A must for all VIEW and NLQ ROM users.

£7.00

(Hi-View compatible)

THE NLQ DESIGNER

(The First & still the Best)

KAGA KP810-910 and Canon PW1080 are two superb printers, as our many thousands of satisfied customers would surely attest to. One of it's particularly strong points is the NLO option that it offers; perhaps one of the more weaker points is the effort required to design your own custom NLO font.

Well the solution is here NOW in the shape of Watford's NLQ DESIGNER ROM! For the BBC Micro. This powerful piece of software allows easy design and entry of a full NLQ font, with further fonts recallable from disc. Once a font has been programmed with the versatile NLQ DESIGNER, it can be saved to disc, downloaded to your Kaga (or Canon) printer, or even programmed into an EPROM (given the appropriate hardware) and then plugged directly into your printer so that it is available immediately when you turn it on. Downloadable Fonts require 6264 RAM chip fitted. Now BBC Master compatible.


A 40 or 80 track (please specify) FONT Disc containing 9 Fonts, (Italic, Courier, Courier Italic, Script, Copper Plate, Shadow, Bold, Double Print and Gothic is now supplied FREE with every package.

(P.S. This ROM is not suitable for Epson printers.)

NLQ Designer ROM & FONT Disc £25

 Kaga Individual FONT ROMs £15 (Write in for further details).

DUMPOUT 3



A highly sophisticated screen dump ROM. This has to be the most flexible and powerful screen dump ROM yet produced for the BBC micro. It will put on paper anything you see on the screen, including all Mode 7 facilities etc. We have to admit that there is one facility that we cannot replicate – if anyone can supply flashing ink we would like to know!

The ROM also provides window setting utilities and two new OSWORD calls that allow mode 7 graphics pixels to be read and plotted using the standard graphic co-ordinate system. The latest version includes a graphic dump trigger for dumping screens from games whilst they are running.

running. Two commands are used to operate the dump

routinest
*GIMAGE – This provides a full graphics dump
of any graphics mode, plus modes 7 and '8'.
There are many optional parameters but you
need only specify the parameters you wish to

Features available include:

Vertical and horizontal scaling through all the graphic modes and mode 7
Rotation of the image produced through 90, 180 and 270 degrees
Left hand indentation setting
Screen dump window definition
Colour grey scaling
Two tone fast dump
Special colour mask
Mode 7 contrast expansion
Mode 7 contiguous dump
Key triggered dumps
User port switched dumps

What does the independent press say!

Practical Electronics, May 1985
"The Dump Out 3 ROM from Watford
Electronics represents one of the most
sophisticated types of printer dump utilities
available for the BBC Micro..."

"an extremely sophisticated and powerful dump utility".

"VERDICT – Dump Out 3 ROM has all the facilities which you are ever likely to need for producing printer dumps. The facilities available work extremely well and if printer dumps are something which you require, then this ROM can be recommended to help you to get the best out of your dot matrix printer".

The Micro User Feb. 1985. "Well, here is that winner"!

"provides) some rather sophisticated screen dumps. Producing high resolution paper copies of graphic screens in any (graphics) mode will be the major reason for buying this ROM, and this is where Dump Out 3 performs PAR EXCELLENCE". (Our capitals for their italics.)

"The versatility of BGIMAGE (the graphics dump command) when using these parameters is amazing. Pictures of almost any size, shape, contrast or distortion may be produced without the need for a reducing photocopier or trick photography".

photography".
"Without reservation I wholeheartedly recommend the Dump Out 3 ROM as the ultimate screen dump facility for the BBC micro. It is easy to use yet highly versatile, and caters for all BBC screen modes in multitone high resolution printing. Whole, partial, rotated and scaled screens may be dumped to almost any BBC compatible dot matrix printer (see our list at the end of this advert). At £25 it must represent excellent value for money and surely cannot be beaten".

Designed for use with the following printers:

GLP, GP80/100/250, CANNON, STAR, KAGA/ TAXAN, NEC, SHINWA CP80, GEMINI, EPSON MX/RX/FX, M1009, NEC PC8023, DMP100/200/ 400, Panasonic KX1080, Mannesman Tally etc. Price including comprehensive manual

£25

MEGABUFFER 256

This new Megabuffer 356 from Watford is a full featured 256K Printer Buffer. It allows the computer to print 256,000 character in a short time thus freeing the computer very quickly. In short it makes light work of printing large documents, screen dumps, etc. It is extremely simple to connect. The features are:

Low Cost, High performance.
 Low Cost, High performance.
 Improves efficiency by making more efficient use of computer and printer.
 Compatible with any computer and printer that uses Centronics Parallel connections including all BBCs, IBM PCs, etc.
 Total compatibility with all software.
 Cheaper phone bills when using your Modems.

Modems.

I deal for those doing large graphics screen dumps that are slow to print.

Multi-Copy facility allows you to print several copies via Megabuffer without going through your computer.

Data Dump facility is included.


Built in test unit for both the buffer & your printer.

printer.

In conclusion it can safely be said that MEGABUFFER 256 is the ultimate printer Buffer for both the amateur and professional user.

Only £99 (carr £2)

THE AMX MOUSE



Now supplied with the NEW SUPERART Software ROM & Disc at no extra cost.

ONLY: £63 (carr £1.50)

We are giving away, absolutely **FREE**, our popular Colour Art software package worth £15 with every AMX Mouse package purchased from us.

AMX MOUSE ONLY £35 AMX DESK Package £19.00 AMX UTILITY Package AMX SUPERART Package AMX PAGE-MAKER Pack £11.00 Best desk-top publishing software. Works with keyboard, joystick and AMX Mouse £32

We are giving away, absolutely FREE, PAGE-FONTS, a disc containing over 20 fonts, with every purchase of AMX PAGE-MAKER from us.

PAGE-FONTS Over 20 fonts for use with AMX PAGE-MAKER

AMX 3D ZICON Disc AMX Database Disc AMX XAM Educational AMX MAX(A gem of desktop (ROM)

£19 £17

£9.50

£19

£19

RB2 MARCONI TRACKER BALL


This popular unit is supplied complete with software

Price: £50

FLEET STREET EDITOR

Software pack £35

DIAGNOSTICS DISC



The BBC micro is a very complex machine and thus diagnosing a fault can be very difficult. Until now, the only way to discover the nature of a fault was either to find a competent friend with a large degree of patience or to find your nearest dealer and pay him to find out what is

nearest dealer and pay him to find out what is wrong.
At Watford Electronics, we realise how difficult it can be when faced with a problem, finding yourself a long way from your nearest dealer, or even just uncertain about your Beeb's health, but not wanting to waste time and money taking it to be looked at.
The solution to these problems is here now, in the form of the Watford's Diagnostics Disc. This excellent utility is specially designed to test out the following areas of your Beeb:
RAMs, ROMs, ULAs, Sound, Keyboard, Disc, RS423, ADC, User Port, Printer Port, Cassette, Joysticks, Speech, Disc Drives, 6502 and Z80 2nd Processors.

Joysticks, Speech, Disc Drives, 6502 and 250 2nd Processors.
This utility is an invaluable aid for all those who take the reliability of their system seriously. A comprehensive manual provides full operating details and a list of possible causes and remedies for any faults that you may find along the way. The package also enables a permanent equipment and service record to be maintained.

Only £20.00

BBC Publication's Popular Educational Software

- Maths with a Story 1 (Cassette). 4 primary
 £10.95 level maths programs
- Maths with a Story 2 (Cassette) 4 further maths programs £10.95
- Picture Craft (Disc) 6 14 age group. Pack consists of flexible geometrical design & colouring programs
- WAVES: Science Topics (Disc) CSC O Level
 £14.95 Physics program.
- RELATIONSHIP: Science (Disc) O Level Biology program.
- BONDING: Science (Disc) O Level Chemistry
 £14.95 program
- ELECTROMAGNETIC SPECTRUM (8 Discs) O
 £14.95 Level program.
- ELECTRONICS IN ACTION (Disc) O Level £14.95 program
- NEWTON & THE SPACE SHUTTLE (Disc) O £20 Level program.
- £20 ECOLOGY (Disc) O Level program.
- £20 POLYMERS (Disc) O Level program.
- Clasification & Periodic Table O Level. The suite is supplied with its own database of chemical elements which can be classified according to your own rule. £20
- FOOD & POPULATION (Disc) O Level program.
- MICROTECHNOLOGY (Cassette) O Level **f6 95**
- A VOUS LA FRANCE (2 Cassettes) A French language home study aid. \mathbf{f} £17

£20

DEUTSCH DIREKT! (Disc & Audio Cassette)

TED

The Teletext Editor Package for serious users

TED is the brand new package from Watford

TED is the brand new package from Watford Electronics for the editing and creation of teletext (Mode 7) screens and displays. TED is ideal for anyone wanting to create their own Mode 7 pictures (such as game title pages), designing animated displays for shop windows, exhibitions, classrooms, etc. TED is also probably the most powerful Prestel screen editor you will ever come across.

Supplied on a special 32k package, full facilities are providing for manipulating the screen, including easy to use pixel manipulation; line, column and block buffering and copying; left and right margins; large text in a variety of different fonts (contained within the ROM device); various borders and effects templates (contained within the ROM device); line and column insertion and deletion; easy to use graphics line drawing. Those are some of the features of editor itself. In addition to this, TED contains routines for taking a number of Teletest errope. the features of editor itself. In addition to this, TED contains routines for taking a number of Teletext screens and creating them into an animated sequence, with user selectable display times, repeats on a group of shows, various entry methods (how the picture is put onto the screen), routing selection (both predefined and keyboard specific), chaining of other shows, etc. Scrolls treat the Teletext sequence as a very long page with a window onto it. Supplied complete with a comprehensive manual. There are many more facilities not mentioned here, so write in for a comprehensive leaflet; you'll wonder how you managed without TED.

Price: £35

ROM-SPELL

"way ahead of any competition"



ROM-SPELL is probably THE most advanced and fastest spelling checker available for the BBC Micro. Printed below are some extracts from a recent independent review (A&B Computing Nov. '85), which we feel sure will convince you that this is THE only spelling checker worth considering.

"The editing system is very next and simple."

"The editing system is very neat and simple, instead of replying to queries and beeps all of

the time . . ."
"The other feature which places ROM-SPELL way in front of any competition is the ability to examine the user dictionary, so any spelling mistakes that have found themselves on the disc can be examined and taken out if necessary

necessary".

"... that it is compatible with many of the popular word processors on the market is a good indication that ROM-SPELL is going to be a very popular product indeed".

"... ROM-SPELL is by far the best spelling checker for the unexpanded BBC B (with or without word processor). It boasts features which are hard to find on conventional spellcheckers on CP-M and MSDOS, namely Spellstar and has a speed-performance ratio of roughly the same as its CP/M cousin. The difference is that the CP/M version would cost the best part of £500".

"... and with such vital house keeping features as an ambiguous word checker, the ability to


"... and with such vital house keeping features as an ambiguous word checker, the ability to edit the user dictionary, a comprehensive manual that is both easy to read and actually ENJOYABLE to learn from, ... I feel confident that ROM-SPELL will woo the word processing public with no problems at all". Compatible with: View, Wordwise & Wordwise +

Don't settle for less, Buy the best.

£25

(Not compatible with 1770 DFS) (Please state 40 or 80 track disc)

ROM MANAGER



Probably the most powerful way of expanding the BBC micro is from the use of Sideways ROMs. One problem faced by the avid ROM collector is that of ROM command clashes. The solution is very simple in the form of the ROM that "Provides comprehensive management of all your installed ROMs". (Quote from BEEBUG November '84.)


Basically, ROM Manager offers you the ability to turn off any installed ROM, or to send any * command to any specific installed ROM. It is said that imitation is the sincerest form of flattery — Acorn's BBC Plus features many of the abilities of this powerful ROM.

Many more facilities available.

SPECIAL OFFER £20



COPY HOLDERS

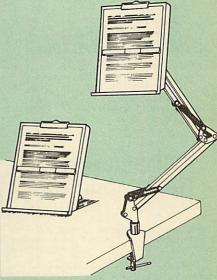

How often have you been about to type hand written notes into your computer when you find that there's nowhere to rest the paper or that your notes are resting at the wrong angle to read the type? Whether the notes be your latest program or the draft of a new trilogy, the new Manuscript Holders from Watford are superb for holding your paper at the ideal height and angle to allow you read and type in ease and comfort.

Available in 2 versions, desk resting and shelf

Available in 2 versions, desk resting and shelf clamping versions, these two units hold your paper firmly by means of a magnetic rul er and a clip grip


Amazing value at only Desk Top £10 (carr. £2) Angle poise £14 (carr. £3)

All prices in this advert are exclusive of VAT:

Continued-



SIDEWAYS ZIF SOCKET



Allows you to change your ROMs quickly and efficiently, without opening the lid. The ZERO INSERTION FORCE (ZIF) socket is located into the ROM Cartridge's position.

- Very simple to install. NO SOLDERING required. The ZIF (Zero Insertion Force) eliminates the possibility of damage to your ROM pins when inserting & extracting.
- The low profile of the socket allows unrestricted access to the Keyboard.
- All data and address lines are correctly terminated to ensure correct operation of suitable ROMs with the BBC micro. We also supply a purpose designed see-through storage container with anti-static lining, allowing you to store up to 12 ROMs, protecting them from mechanical and static damage.
- This versatile hardware solves the problem of running out of socket space. Simply lift the ROM from the ZIF & insert a different one (No pulling or pushing of Cartridges. It is a must for all professionals and Hobbyists alike.)
- BBC, B+ and Master compatible.

ONLY £15 (carr £2)

Low Profile CARTRIDGE SYSTEM

Complete System consists of: Low profile ROM Cartridge, Socket housing, Cable assembly, 5 labels and a library storage rack.

Complete System

Spare CaruSpare Rack Spare Cartridges £2.50

£1.50

16K Sideways **RAM Modules**

Complete with such features as read and write protection, these new modules from Watford Electronics are ideal for the hobbyist, software developer and ROM collector.
Key points to note about this new addition to the

Watford range of products are:

- Write protection (useful in a variety of circumstances).
 Read protection (allows recovery from ROM crashes).
 Compact construction.

- May be fitted in systems even with a ROM board.
- Multiple units may be fitted, even with a ROM

- No overheating or overloading problems.
 Free utilities disc supplied.
 Can be used as a 16K PRINTER BUFFER.
 Ideal for professional software development.
- Supplied with utilities software disc.

Only: £29 (carr £2)

Optional extras

READ and WRITE protect Switches £2 each Battery for Battery Backup £3

16K DISC RAM

Unlike other RAM boards, this revolutionary, battery backed up, write protectable 16K sideways RAM board allows you to run from disc every sideways ROM available.

Features available are:

- No soldering or modifications to BBC micro
- Plugs into normal ROM socket fitting neatly under the keyboard allowing room for other
- under the keyboard allowing room for other add-ons.

 Easy to use. Comes with disk based software to SAVE and LOAD ROMs. Allows you to make backup copies of your ROMs.

 Disk software can be copied onto other discs when disc is full.

when disc is full.

No messy plugging and unplugging of your ROMs. Simply Load the one you want into DISC RAM.

Ideal for Professional users to develop ROMs. Backup facility allows testing of final versions without using EPROMs.


The switch provided allows backup and write protection to be switched off externally.

Can also be used as 16K printer buffer RAM in conjunction with our Buffer & Backup ROM.

New Low Price: £32 (carr £2)

P.S. 16K DISC RAM Board is not designed to work in conjunction with a Sideways ROM Board.

SOLID STATE **16K SIDEWAYS RAM**



This new unit from Watford, which utilises the latest in Static RAM technology, offers 16k of easy-fit sideways RAM in a very compact unit with a footprint no larger than a standard 28pin EPROM. With only a single flying lead terminating in a mini hook-on probe, to fit, (no soldering required) this compact unit works with any BBC Micro with or without a ROM board. Compatible with BBC B Plus. Like our other 16K RAM Modules, this unit is very simple to fit.

Only £28 (carr 2)

Supplied complete with comprehensive software on Disc, Operating and fitting instructions.

Do you find the 16K Sideways RAM Units confusing? If so, we have compiled this quick questionnaire to help YOU decide which is the best one for you. If the answer to any of the questions is yes, then use the index number to select from the boards below. Options in brackets indicate possible secondary choices.

brackets indicate possible secondary choices.

Do you require:

Sideways RAM for a BBC B+
Choose 1, 2 or 3.
Sideways RAM for the B+? Choose 3.
A small, basic module? Choose 3.
A sideways RAM module for a ROM board? Choose 1 or 3.
An easy to use utilities disc[Choose 1, 2 or 3.

More than one module installed at once? Choose 1 or 3.

To use sideways RAM as a printer buffer?

Battery Backup? Choose (1) or 2.
 Write protect for RAM (makes ROM look like RAM)? Choose (1) or 2.

like RAM)? Choose (1) or z.


• Read protect (allows recovery from crashes)? Choose 1.

Key: 1) 16k Sideways RAM Module 2) 16k Disc RAM 3) Solid State 16k Sideways RAM

GRAPH PAD 2

Supplied complete with Software £60 (Carr. £3)

SOLDERLESS SIDEWAYS ROM SOCKET BOARD



In the May 1986 Micro User's independent review, the writer concludes, "The board has been well laid out. Its position is much better than others—not over the HOT RAM chips and further away from the disc controller area". "I give the solderless ROM board the thumbs up and wish it

This brand new board from Watford Electronics is designed specifically for those wishing to add a ROM board to their own BBC without the need to perform any soldering.

This new board expands the total possible number of ROMs in a BBC from 4 to 16.

Unlike our competitors inferior boards, the ONLY upgrade required for fitting battery backup to the Watford Solderless ROM board (all Watford ROM boards, actually) is the fitting of the battery itself. (No other expensive components are required.)

- The key features of this new, no fuss, easy to install quality product from BBC leaders Watford Electronics are as follows: Increase your BBCs capacity for ROMs from 4

No soldering required.

No soldering required.
Very low power consumption.
Minimal space required.
Compatible with Torch, DDFS, RAM Card, 2nd
Processor, etc.
Socket 14 takes two 6264 RAM chips.
Read protect to make RAM "Vanish") allows
recovery from ROM crashes.
Battery backup option for RAM chips.
Supplied ready to fit with comprehensive
instructions.

instructions

Price: Only £32 Battery backup fitted £36 (carriage £2)



The BBC B+ Micro ROM EXPANSION BOARD


Specially designed for all BBC Plus users, this board sits in an external box, and will accept either 10 off 16k EPROMs, OR 10 off 32k EPROMs. With the 32k EPROMs, only 5 can be 'online' at once (that's all the B+ can address, as each chip 'holds' two normal sockets worth), but you can swap between the two banks if necessary. With the 16k EPROMs, you can obviously address them all at once. An extra card can be added to permit 2 banks of 10 EPROMs to be used (again with only one bank available at once).

The ROM box, which has its own mains power supply, and connects to the BBC Plus via a specially designed card (which is a buffered card for your peace of mind) permits easy access to the EPROMs via the hinged lid. NO soldering is required for this board.

£79 (carr £2)

Watford ROM/RAM CARD

A must for all serious users

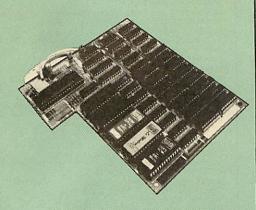

Watford Electronics announced the first ever commercial ROM board for the BBC micro, the Watford Electronics 13 ROM Socket Board 3 years ago. Following the success of this board, we have designed what probably represents the ultimate in expansion boards, the new Watford Electronics ROM/RAM board. This highly versatile and sophisticated board represents the latest in "2nd generation" sideways ROM technology for the BBC micro, designed to satisfy the serious BBC user.

- NO SOLDERING required to fit the board.
- NO overheating problems. No User Port corruption (avoids problems with the mouse, modems, Eprom Programmers,
- Fully buffered for peace of mind.
 Firm mounting in BBC micro.
 Compatible with all BBC micros (not BBC+ or
- Total number of ROMs increased from 4 to 8.

- Total number of ROMs increased from 4 to 8.
 Up to 8 banks of sideways RAM (dynamic).
 Option for 16k of Battery backed CMOS RAM (CMOS RAM needs one ROM socket).
 Software Write protect for ALL RAM.
 Read protect for CMOS RAM (ALLEVIATES crashes during ROM development).
 Separate RAM write register (&FF30 to &FF3F).
 Automatic write to currently selected RAM socket for convenience.
 Accepts any ROM.

- socket for convenience.

 Accepts any ROM.

 FREE utilities disc packed with software.

 Compatible with our DDFS board, 32k RAM Card, Delta Card, sideways ZIF, etc.

 Large printer buffer.

 UNIQUE Fully implemented RAM FILING SYSTEM (similar to the popular Watford DFS).

 ROM to RAM load and save facilities.

The SFS (Silicon Filing System) can utilise up to the full 128k of RAM (with the SFS in any paged RAM) as a SILICON DISC. This behaves as a disc drive, with all the normal Watford DFS features (including OSWORD &7F for ROM-SPELL, etc.) to provide an environment that looks like a disc but loads and saves MUCH faster.

The ROM-RAM Board plugs into the 6502 CPU socket. This leaves free all the existing ROM sockets, which can still be used normally.

Any ROM that can be plugged into the BBC micro's own ROM sockets may be used in the ROM-RAM Board.

The ROM-RAM Board is supplied with all ordered options fitted as standard. Upgrade kits

ordered options fitted as standard. Upgrade kits (with full instructions) are available for all of the

options, for later.

Please write in for further details.

INTRODUCTORY PRICES:

- ROM/RAM card with 32k dynamic RAM£39 ROM/RAM card with 64k dynamic RAM£52 ROM/RAM card with a massive 128k dynamic
 - (carriage on ROM-RAM Card £3)
 OPTIONAL EXTRAS:
- 16k plug-in Static RAM kit..... 16k Dynamic RAM for Upgrade.....£7.50 Battery backup...

Read and Write protect switches.....£2 each
Complete ROM-RAM board
(all options installed).....£89

Le Modem



The MODEM from Watford

At last a professional MODEM for the BBC Micro. Unlike other 'Modem packages' this is a complete package there are no extra software costs to get 'up and running'. Of course Le MODEM is multistandard, i.e. 300/300, 1200/75 & 75/1200 UK and BELL (USA) are all supported.

The features that make Le MODEM such good

A complete communications terminal that transforms your BBC Micro into a very powerful World-wide data transfer system.
Auto Dials, Auto answers, and is completely controlled by your micro. There are no external controlled.

controls!

Allows you to access PRESTEL, B.T. GOLD, THE SOURCE, MICROLINK, MICRONET, MICROWEB, THE TIMES NETWORK, MICRO LIVE (BBC TV database), CITY BB and more.

Designed to be SIMPLE but SOPHISTICATED. To LOGON to a data base all you have to know is its TELEPHONE NUMBER, Le MODEM does the

est.
Supplied with a comprehensive telecomms
package in a 16K sideways ROM which includes a
FULL PRESTEL terminal allowing TELESOFTWARE to be downloaded.

A comprehensive 80 column terminal. This includes XMODEM error checked transfer proto-col, to allow error free data transfer anywhere in the wellow.

col, to allow error free data transfer only
the world!

FULLY controlled by simple '*COMMANDS
allowing you to control it from your own BASIC
programs. To get you started we supply a FREE
disc of bundled software!

Connects to the 1MHz bus. A *AUDIO ON-OFF

Connects to the 1MHz bus. A *AUDIO ON-OFF command allows you to actually hear the telephone line through your BBC micro loudspeaker.
 Completely self contained with internal mains power supply. (Even a free mains plug is fitted!) A *TEST facility gives ON SCREEN indication that Le MODEM is working correctly.
 Packaged in such as way that you need nothing else except a BBC Micro to communicate with computers all over the world.
 FREE Registration to MicroLink.
 BT Approval applied for.
 (When ordering, please specify the version)

(When ordering, please specify the version required, (BBC or Master)

SPECIAL OFFER

Price: £74 (carr £3)



(Price includes, Le Modem, Software ROM, Cables & Comprehensive Manual) (Write in for further details)

Nightingale Modem

SPECIAL PRICE to our Customers



(Price includes: Nightingale Modem, Commstar ROM pack, Cables & Comprehensive manual)

Nightingale Modem without software Only £87 COMMSTAR ROM package only (P&P on modem £2.00)

Auto Dial Utilities Disc

£9.50

APOLLO



The NEW Modem from Watford

Following numerous requests from you, our discerning customers for an APPROVED, Low Cost & High Performance modem with Auto Dial Cost & High Performance modem with Auto Dial & Auto Answer facilities as standard) we bring you the versatile APOLLO Modem. Just compare the features and look at the price (which incidentally includes the cost of the Software, manual and BBC connecting cable). We are sure you will agree that Watford Electronics in their traditional way are giving you a super 'value for money' deal money' deal.

- Just look at these features:

 V21 for Bulletin boards, Microlink, Telecom Gold, etc.
- V23 for Prestel, Home Banking, and other Viewdata services
- Reverse V23 allows User run Viewdata service.
- 1200-1200 half duplex for communications.
- XMODEM, HEX and ASCII file transmission.
- Auto Dial of given 'phone number.
- Auto Answer for User's Bulletin Board.
- 80 column terminal with split screen facility.
- Prestel text screen dump
- Fully BABT approved.
- FREE Registration to MicroLink.

The Apollo is attractively finished in matt black. It opens the doors to world communication to both, the Hobbyist and the Professionals alike. With baud rates varying from 300/300 Originate and Answer, 1200/75 and 75/1200 full duplex and 1200/1200 half duplex, virtually all the popular tele-services can be accessed. A comprehensive Comms ROM oversees the use of the APOLLO, providing simple commands for all the software controlled facilities. APOLLO is an ideal modem for both the first time buyer and the seasoned user. Join the Telecommunications Revolution—Buy a Watford APOLLO!

Special Launch Price: £75 (Carr £3) (Write in for full specification)

BT TELEPHONE CONNECTORS

Name of Street		
U	1/4A Mini Line Master	£4.50
U	1/6A Mini Line Slave	£3.00
IU	2/4A Line Master	£4.00
IU	2/6A Line Slave	£2.50
	3/4A Flush Master	£3.95
	3/6A Flush Slave	£2.75
	10/3A Dual Splitter	£5.50
	4 Way BT Plug	£0.75

Versatile BEEB SPEECH SYNTHESISER Unit



The Watford Speech Synthesiser is a very flexible speech synthesis unit based upon the powerful phonemes system. This system stores the building blocks of speech (called phonemes) and allows you to combine them quickly and easily to form vietnally any word impainable. form virtually any word imaginable

Supplied with an advanced ROM, you are provided with a 500 word dictionary to get you started. These can easily be added to by following the notes given in the comprehensive

SPECIAL PRICE £32 (carr £2)

Continued -

COMPUTER CONCEPT'S ROMS

ACCELERATOR	£48
CARETAKER Basic Utility	£25
DISC DOCTOR	£28
Graphics ROM	£23
TERMI	£25
COMMUNICATOR	£49
SPEECH ROM	£24
Printmaster	£24

Wordwise

£24

Wordwise plus

WORDWISE PLUS £40

We are giving away absolutely FREE, the superb Word-Aid ROM worth £24, with every WORDWISE PLUS package bought from us.

Word-Rid

The most comprehensive utilities ROM for Wordwise-Plus

Extend the power of your Wordwise Plus word processor with this most advanced ROM from Watford. By utilising the powerful Wordwise Plus programming language, WordAid provides a whole host of extra features, all accessed via a special new menu option. This ROM has been personally approved by Mr Charles Moir, the author of WORDWISE PLUS.

- Alphabetical sorting of names and
- Text transfer options. Chapter marker.
- Epson printer codes function key option.
 Search and display in preview mode.
 Embedded command removal.
 Print Multiple copies of a document.

- Multiple file options for print and preview. Address finder.

- Address inder.
 Label printer.
 Mail-merger.
 Number/delete/renumber.
 Clear text-segment area.
 BBC B, B+ and Master compatible.

Only £24

(N.B. Word Aid requires a Disc Interface in your Micro)

HI-WORDWISE-PLUS

Supplied on disc. This version requires a WORDWISE-PLUS ROM to be present in the machine. It gives up to 44k of text space on the 6502 2nd processor.

Inter SHEET ONLY £37



ONLY: £26

Inter-WORD

Only: £42

Special Discount price for the existing Wordwise Plus owners. Simply quote your reg. number and pay.

Only: **£39**

All Prices Exclusive of VAT

VIEW

VIEW WORDPROCESSOR 2.1

£37

VIEW 3.0 ROM

Price: Only £54

HI-VIEW

£36

to

£37

£12

(for use with 6502 2nd Processor)

VIEW Printer Driver Generator

Please specify Disc or Cassette)

VIEWSHEET (Acornsoft) £37

VIEWSTORE

VIEWSPELL with 80 track disc f29

VIEWPLOT Disc £22

VIEW-INDEX

Watford's own Sophisticated VIEW PRINTER DRIVER for Epson FX80 & KAGA KP

Only £10

VIEW DRIVERS FOR JUKI & BROTHER HR15 PRINTERS

Only £10

VIEW-VIEW SHEET PRINTER DRIVER for SILVER REED (Officially approved by Silver Reed)

Only: £10

MINI OFFICE II (disc)

£14.50

REPLICA 3

This new improved REPLICA 3 from Clares is a very powerful disc based TAPE to DISC Utility. It now transfers even more programs than ever before. Replica 3 will not work with all programs but then neither will anything else. 30,000 Replicas have been sold to date. It has to be good be good.

£13 (40 or 80 track)

الكور

ARABIC ROM for the BBC Micro

The ALNOOR ARABIC ROM converts your BBC into a bilingual computer. New keytops provide both English and Arabic symbols. Two sets of Arabic symbols are provided for use in either context sensitive or insensitive operation.

20, 40 and 80 column operation. Compatible with ASMO (449). English-Arabic printer interface software. Numeric entry from either left or right of number. Communications software to send or receive 7 or 8 bit data.

Different shapes of Vowels (e.g. Shadda, Fatha, etc). Different shapes of Hamza. Full English and Arabic character sets with all special characters.

special characters.

£85

(Price includes Alnoor ROM, Operating Manuals & a full set of Arabic/English Keytops)

VIEW PRINTER DRIVER ROM

(Professional facilities for demanding users)

View is a powerful word processor, but until now has seriously lacked in terms of printer support. With the launch of our Printer Driver ROM, which includes an extremely powerful and easy to use Printer Driver Generator, View users can find themselves in the realms of advanced word processing only at a small advanced word processing only at a small

and easy to use Printer Driver Generator, View users can find themselves in the realms of advanced word processing only at a small outlay.

The VPD extends View's printer command with a series of mnemonic commands. All standard highlight sequences are also supported. A large range of printers are supported by drivers contained within the ROM (the drivers can be downloaded and customised). Printers supported include: Epson's MX, RX, FX, FX, LX, JX80 range, HI80, KP810/910, PW1080, JP101, HR15, M1009, GLP, JUKI 6100, etc.

Other printers are readily supported by defining a Printer Driver using the built in Printer Driver Generator. The features mentioned below are available to both the built in Printer Drivers and user defined drivers (assuming the printer supports the features). NLQ control, Underline, Bold, Proportional Spacing, Microspacing, Italic, Superscript, Subscript, Condensed, Enlarged, Double Strike, Set lines per inch numerically (e.g. CPI 6), Set characters per inch numerically (e.g. CPI 5), Select printer font, Select printer ribbon colour, Translation sequences, Emulation of BBC Character Set, Simple numeric expressions for certain operations, Full printer setup, Send control codes, Print prompt on screen, Redefinable Pad character, Pause for key press, Prompt to change daisywheel, and Execute * command when printing.

Other features include a very powerful on screen preview, with bold, italic, underline, super/subscript, enlarged highlights, and a special printer driver to allow memory based text to be previewed by View 1.4. Of course, View 1.4, 2.1 and 3.0 are all supported, as is Shadow RAM and 6502 Second Processors. The BBC B series and Master series of micros are supported. A comprehensive manual is supplied. All in all, a very professional product for the discerning user who wants power at their finger tips. (Write in for a detailed leaflet).

Price: Only £33



CREDIT CARD 24 HOUR Ansaphone Hot Lines (0923) 50234-33383

THE INVESTIGATOR

This sophisticated Utility program on disc, enables you to make security back-up copies of most of your valuable Disc Software. Makes full use of all 8271 (will not run with double density DFSs) facilities to discover the precise format of your protected disc so that an exact copy can be produced. Supplied with detailed instructions. Please specify 40 or 80 track disc when ordering. when ordering.

Only £20

ROMAS THE CROSS ASSEMBLER AND MACRO EDITOR FOR SERIOUS PROGRAMMERS!

ROMAS is a carefully designed, sophisticated yet simple to use, development system for serious assembly language programmers. Using the BBC as the development system, you can choose your target system from the following processors:

6502, 65C02, Z80, 8085, 8041, 6809 and Z8 . This includes the Acorn 6502 & Z80.

A give away at . . . Only £29 Please specify 40 or 80 track disc when ordering.



ARIES CORNER

Aries B-32 **Shadow RAM Card**

18 months of intensive research and development have produced a worthy successor to the widely acclaimed Aries-B20: the revolutionary Aries-B32. This 'second generation' expansion board features 32k of RAM and a 16k ROM socket.

Like the BBC B+, the B32 provides 20k of shadow screen RAM and 12k of sideways RAM. Unlike the B+, the B32 has simple software commands which allow the user to reconfigure the RAM as 16k of shadow RAM and 16k of sideways RAM, or all 32k as sideways RAM.

With the B32, the programmer gets up to 28k of RAM available for Basic, Logo, Comal, Forth, Lisp and BCPL programs in any screen mode. The business user gets extra memory for View, ViewSheet, Wordwise Plus and many other applications. For advanced applications, the scientific user gets access to a massive 47k of data storage using the Acorn approved *FX call. Sideways RAM enables you to load sideways ROM images from disc, allowing you to have a large library of sideways ROMs (subject to the copyright holder's permission) stored on disc. The B32's sideways RAM can also be used to extend any operating system buffer (such as the printer buffer) or to load tape programs into a disc system.

The B32 simply plugs into the processor

a disc system.

The B32 simply plugs into the processor socket on your BBC micro – no flying leads to connect and no soldering. Provision of the onboard ROM socket means that the Aries-B32 control ROM does not use up one of your existing ROM sockets.

Price: B-32 £80 (carr. £2)

Aries B-12 Sideways ROM Board

This board is extremely well made, simple to install, reliable when fully loaded and compatible with the Aries B-20 and the Aries install, reliable when fully loaded and compatible with the Aries B-20 and the Aries B-32. For the business user or educationalist, the compact and secure internal fitting is ideal, with the ROM board tucked neatly inside the lid where it will not cause overheating problems. The serious software developer and the hobbyist may prefer to mount the board externally, giving instant access to the sockets for experimental purposes. A zero-insertion force (ZIF) socket may be fitted to the board to enhance this mode of operation.

The B12 provides a total of twelve sideways ROM sockets (the four in the original machine are replaced by the twelve on the board), all fully accessible by the MOS sideways ROM system. In addition, there are two sockets for sideways RAM, giving up to 16k of RAM using 6264 static RAM chips.

The B12 system consists of two parts: a large detachable 'mother board' which carries the extension ROM sockets and a small 'base board' on a short ribbon cable, which plugs into the existing sideways ROM sockets. This two-board design eliminates the reliability problems previously associated with some other ribboncable based systems.

If you do not have an B32 or B20, a small adaptor module (the Aries B-12C) is available at

all you do not have an B32 or B20, a small adaptor module (the Aries B-12C) is available at a nominal cost. The 6264 static RAM chips used to provide the sideways RAM are advertised elsewhere in our advert

Price: Aries B-12 £40. Aries B-12C £5

THE ARIES RANGE **HARDWARE** REQUIREMENTS

Aries B-32 & BBC B, MOS 1.20, hardware plugs

Aries B-32 & BBC B, MOS 1.20, hardware plugs into CPU socket.

Aries B-12 & BBC B, MOS 1.20, hardware plugs into all four sideways ROM sockets and connects to the B32 or the B20. The adaptor Aries B-12C module is necessary where these are not fitted.

Aries B-488 BBC B, MOS 1.20, Hardware plugs into 1MU, Bus

into 1MHz Bus

ARIES B-488 **IEEE-488 INTERFACE UNIT**

The Aries-B488 is an interface unit to enable the BBC micro to control and monitor IEEE-488 bus systems. The IEEE-488 bus (also known as the 'GPIB' or 'HP-IB') is the standard method of interconnecting programmable laboratory instruments and control equipment. Using the B488, up to 15 devices may be connected in a size of the speed data retreated. single high-speed data network

Aries B-488 Unit: £238 (Carr £3)

OFFICE MASTER



CASHBOOK - A complete "Stand Alone" accounting software package for the cash based sole trader/partnership business. It is designed to replace your existing cashbook system and will provide you with a computerised system complete to trail balance.

FINAL ACCOUNTS – Will take data prepared by the Cashbook module and produce a complete set of accounts as following: Trial Balance with inbuilt rounding routine; Notes to the accounts; VAT Summary; Profit & Loss A/C; Balance Sheet

MAILIST – A very versatile program. Enables you to keep records of names and addresses and then print, examine, sort and find them, all with special selection techniques.

EASILEDGER - A management aid software tool designed to run alongside an existing accounting system. Essentially a Debit/Credit ledger system which can handle sales, purchase and nominal ledger routines to provide instant management information.

INVOICES & STATEMENTS - Greatly reduces Statements by storing essential information like customer names, addresses and account numbers. Has VAT routines and footer messages facility.

STOCK CONTROL – Allows you to enter stock received, stock out, summary of stock items and current holdings together with details of total cost, total stock to minimum level, units in stock ordering, quantity and supplier detail.

All this for only £21 (Cassette or Disc)

OFFICE MATE



- DATABASE
- BEEBCALC SPREADSHEET
 BEEBPLOT GRAPHICS
- WORD PROCESSOR

DATABASE – Set up a computerised "card index" system and add records/data to the file your way. Features include search, sort, mathematical calculations, printer routines, data summaries, etc.


SPREADSHEET - Offers a wide range of invaluable calculation and editing features. Beebplot will take files created by Beebcalc to provide data portrayal in graph, histogram or pie chart format.

BEEBPLOT - Provides an easily assimilated risual representation of numerical data.

WORDPROCESSOR – Provides many routines found in large and expensive packages. OFFICE MATE Only £10

(Cassette or Disc)

PLINTHS FOR BBC MICRO, **MASTER & PRINTERS**



Protect your computer from the weight and heat of your monitor. The BBC micro plinths have slots for maximum ventilation. The single plinth is suitable for a BBC and monitor, whilst the double height version provides enough room for our stacked or side-by-side dual disc drives or TORCH Disc pack, to be placed in the centre section. If you use our stacked drives, the remaining space can be used for further peripherals e.g. Speech Synthesizer, EPROM programmer or simply stationery. The computer slides neatly in to the lower section allowing easy access to remove the lid. The printer plinth is equally sturdy but without the cooling slots. It allows for access to the paper from the front as well as from the rear, (a facility not often thought of in similar products) facility not often thought of in similar products) if the paper is located beneath the plinth. This is a very convenient way to work especially if your work area is not deep enough to take the printer and paper separately

SINGLE BBC PLINTH DOUBLE BBC PLINTH PRINTER PLINTH SINGLE MASTER PLINTH DOUBLE MASTER PLINTH £11 (carr. £1.50) £20 (carr. £2.00) £10 (carr. £1.50) £14 (carr £1.50)

£25 (carr £2.00)

THE EUREKA CARD

(The Unique RAM Expansion System)

(The Unique RAM Expansion System)

The Eureka Card is Watford's latest and most sophisticated RAM expansion system. Using advanced PAL based technology this card is a breakthrough in RAM systems for the BBC micro. The Eureka Card provides the user with around 58K of free memory in Basic, VIEW and WORDWISE PLUS. You also get Shadow RAM from within the active language. No other RAM expansion system can match that!

Load up to 58K long Basic programs. Texts in VIEW and WORDWISE PLUS up to 58K as well. This with absolutely NO loss of speed in accessing your text or program. Eureka consists of a card containing 64K of program memory, two parallel banks of sideways RAM and some extremely complex switching circuitry. This is all controlled by Eureka's highly sofisticated software supplied in ROM. Designed to a very high specification, this board is fully buffered to give reliable operation under virtually any circumstances.

The Eureka board plugs into the 6502 socket.

circumstances.

The Eureka board plugs into the 6502 socket and has NO messy flying leads. It is compatible with many other products from Watford, such as our Solderless ROM Board and our ROM/RAM Board. All in all, the Eureka Card is an amazing board. Jump into the age of serious data processing with a Eureka Card! Please write in for further details 'on advantages the Eureka can offer you'.

Introductory price: Only £89 (carr £3)

(P.S. Eureka is only suitable for a standard model B; it normally replaces any Shadow RAM cards present. Some speed degredation does occur with filing system access. Eureka cannot be used at the same time as a second processor).

BEEBMON

The most powerful machine code monitor for the BBC Micro £24.


Continued-



15 Hrs Word Processor Using BBC 30 Hour BASIC (BBC Micro) 40 Bestmachine Code Routines 6502 Assembly Language Program 6502 Application 6502 Assembly Lang. Subroutines 6502 Development System 6502 Reference Guide 6502 Maschine Code for Humans 6502 Reference Guide 6502 Maschine Code Frogramming 68000 Machine Code Programming 68000 Machine Code Programming 68000 Programming the 6809, Programming the 6809, Programming the 6809, Programming the Art of Music Graphics A Young persons Guide to BBC Basic Advanced BASIC ROMUser Guide Advanced Graphics with BBC Assembly Language Programming BBC Micro Adventure into BBC BASIC Applied Assembly Language Programming FOR the BBC Micro Assembly Language Programming FOR the BBC Micro BBC Basic ROMUser Guide BBC Sasic Guide for BBC Assembly Language Programming BBC & Electron BBC Basic ROMUser Guide BBC Cappendium BBC & Electron BBC BC Guide for BBC BBC BASIC for Beginners BBC BC Guide for BBC BBC BC Guide for BBC BBC BASIC for Beginners BBC Micro Athanced Ref. Guide BBC Micro Advanced Ref. Guide BBC Micro Advanced Ref. Guide BBC Micro File Handling on BBC BC Greating BBC Micro File Handling on BBC BC Greating BBC Micro File Handling on BBC BC Greating BBC Micro File Handling BBC Micro File File BBC Micro File File BBC Micro File File BBC Micro File BBC Micro File File BBC Micro File BB	BOOKS (No VAT on Bo	oks)
40 Bestmachine Code Routines £7.95 6502 Assembly Language Program £19.99 6502 Assembly Lang. Subroutines £19.99 6502 Development System £7.95 6502 Machine Code for Humans £7.96 6502 Reference Guide £9.95 68000 Machine Code Programming £19.95 68000 Programming the £13.00 6800 Programming the £14.95 At Joung persons Guide to BBC Basic £14.95 Advanced Disc User Guide £16.95 Advanced Disc User Guide Advanced BASIC ROMUser Guide £15.95 Advanced Disc User Guide Advanced Graphics with BBC £9.95 Assembly Language Programming BBC Micro £6.95 Assembly Language Programming BBC Micro £6.95 Assembly Language Programming On the BBC Micro BBC Micro £8.95 Assembly Language Programming on the BBC Micro	15 Hrs Word Processor Using BBC	
6502 Assembly Lang up £11.96 6502 Assembly Lang. Subroutines £11.96 6502 Development System £7.95 6502 Reference Guide £9.95 68000 Assembly Lang. £7.95 Programming £19.95 68000 Assembly Lang. £14.95 Programming the £16.95 6800 Programming the £16.95 6800 Programming the £16.95 6809 Programming the £16.95 At Voung persons Guide to £14.95 Advanced Disc User Guide £6.95 Advanced BASIC FOMUser Guide £6.95 Advanced BASIC FOMUser Guide £6.95 Assembly Language Programming FORthe BBC Micro £6.95 Assembly Language Programming FORthe BBC Micro £8.95 Assembly Language Programming FORthe BBC Micro £8.95 BBC BE Goorpendium £6.95 BBC BE Compendium £7.95	30 Hour BASIC (BBC Micro) 40 Best machine Code Routines	
6502 Assembly Lang, Subroutines £19.95 6502 Machine Code for Humans £7.95 6502 Reference Guide £9.95 68000 Assembly Lang. £19.95 Programming £19.95 68000 Assembly Lang. £14.95 Programming the £16.95 6809, Programming the £16.95 At Voung persons Guide to £16.95 BBC Basic £16.95 Advanced Disc User Guide £16.95 Advanced BASIC ROM User Guide £16.95 Advanced Basic User Guide For BBC £16.95 Advanced Basic User Guide For BBC £16.95 Assembly Language Programming For Abplied Assembly Language Programming For Assembly Englage Programming For Assembly Language Programming For Base Market Projects For Assembly Language Programming For Asse	6502 Assembly Language Program	£19.95
6502 Development System £7.95 6502 Reference Guide £9.95 68000 Assembly Lang. £9.95 68000 Machine Code Programming £13.06 68000 Machine Code Programming £13.06 68000 Programming the £12.95 6800 Programming the £16.95 AUSer Guidet Owordwise Plus £9.95 A Voung persons Guide to £5.95 BBC Basic £9.95 Advanced BASIC ROMUser Guide £16.95 Advanced Graphics with BBC £9.95 Advanced BASIC ROMUser Guide £6.95 Advanced Sasembly Language Programming on BBC Micro £6.95 Assembly Language Programming FORthe BBC Micro £8.95 Assembly Language Programming FORthe BBC Micro £8.95 Assembly Language Programming FORthe BBC Micro £8.95 BBC Selectron £8.95 BBC Selectron £8.95 BBC Master Guide For BBC Micro £8.95 BBC Huser Guide For BBC Micro £8.95 BBC Marco ROM Book £10.95 BBC Micro Advanced Ref. Guide £10.95 BBC Micro	6502 Assembly Lang Subroutines	£11.95
68000 Assembly Lang. Programming 68000 Machine Code Programming 68000 Programming the 6809, Programming 68000 Programming 6800	b502 Development System	£7.50
68000 Assembly Lang. Programming 68000 Programming the 6809, Progr	6502 Reference Guide	
68000 Machine Code Programming 68000 Programming the 68009, Programming the 68009, Programming the 68009, Programming the 6809, Programming the 6809, Programming the 6809, Programming the 6809, Programming the 68009, Programming the 68009, Programming the 68009, Programming 68000 Standard of 6909, S	68000 Assembly Lang.	
6800 Programming the 6809, Programming the Art of Music Graphics A User Guide to Wordwise Plus A Young persons Guide to BBC Basic Advanced Disc User Guide Advanced BASIC ROM User Guide Advanced Graphics with BBC Assembly Language Programming BBC Micro Adventure into BBC BASIC Applied Assembly Language Programming FOR the BBC Micro BBC BC Hordware Projects BBC BASIC Forth Gr. 50 BBC Hardware Projects BBC Micro Advanced Ref. Guide BBC Micro Advanced Ref. Guide BBC Micro File Handling on BBC Micro File Handling on BBC Micro File Handling on BBC Wordprocessor Beginners Guide BC Micro File Handling on BBC User Guide File Forth File Forth Forth Forth Forth BBC Micro File Handlook File File Forth Forth Forth EBC Micro File Forth Forth Forth EBC Micro File Forth Forth Forth EBC Micro File Forth Forth EBC Micro File Forth Forth Forth EBC Micro File File File Forth Forth EBC Micro File File File File File File File File	68000 Machine Code Programming	
Artof Music Graphics A Young persons Guide to BBC Basic Advanced Disc User Guide Advanced BASIC ROM User Guide Advanced Graphics with BBC Assembly Language Programming BBC Micro Adventure into BBC BASIC Applied Assembly Lang. for BBC Assembly Language Programming FOR the BBC Micro Assembly Language Programming BBC & Electron Basic ROM User Guide Basic User Guide for BBC Micro BBC BL User Guide BBC Compendium BBC B+ User Guide BBC Huser Guide BBC Micro Romanial Business BBC Micro File Handling on BBC Micro File Handling on BBC User Guide BBC Wordprocessor Beginners Guide BCP-User Guide CP-M-86 User's Guide CP-M-86 User's Guide CP-M-86 User's Guide CP-M-Bible CP-M Bible CP-M Borth Grobs CP-M SYSTEM (DFS) Operating Manual for BBC Disc Programming Techniques Disc System for the BBC Micro Guide to BBC ROMs Graphs & Charts on BBC Micro Guide to BBC ROMs Graphs & Charts on BBC Micro Huttoduction to COMAL Introduction to PASCAL SO-PASCAL Reference Manual LISP 2nd Edition ILSP, ABeginners Guideto ILSP ABeginners GE-95 GE-	68000 Programming the	£22.95
A Young persons Guide to BBC Basic Advanced Disc User Guide Advanced BASIC ROM User Guide Advanced Graphics with BBC Assembly Language Programming BBC Micro Adventure into BBC BASIC Applied Assembly Lang. Gr BBC Assembly Language Programming FOR the BBC Micro Assembly Language Programming BBC & Electron BBIC BECTON BBIC Micro Advanced Ref. Guide BBIC Micro Advanced Ref. Guide BBIC Micro File Handling on BBIC Micro Disc Companion BBIC Micro Disc Companion BBIC Micro File Handling on BBIC Micro File BBIC Micro BIC P-M Bible Complete FORTH COPM BIBL COPM	Art of Music Graphics	
Advanced Disc User Guide Advanced BASIC ROM User Guide Advanced Graphics with BBC Assembly Language Programming BBC Micro Adventure into BBC BASIC Applied Assembly Language Programming FOR the BBC Micro BBC BE Guide for BBC Micro BBC BE Guide for BBC Micro BBC BE H User Guide BBC BASIC FOR Beginners BBC Micro ROM Book BBC Master 128 High Flyer BBC Micro Advanced Ref. Guide BBC Micro Disc Companion BBC Micro File Handling on BBC User Guide BBC Micro File Handling on BBC User Guide BBC Micro File Handling on BBC User Guide BBC Micro Becompanion BBC Wordprocessor Beginners Guide BBC Within the Micro BBC BC Within the Micro BCP-User Guide CP-M Bible CP-M Book BBC Within the Micro BCP-W Handbook with MPM CP-M Plus Handbook CP-M Flus Handbook CP-	A User Guide to Wordwise Plus	
Advanced BASIC ROM User Guide Advanced Graphics with BBC Assembly Language Programming BBC Micro Adventure into BBC BASIC Applied Assembly Language Programming FOR the BBC Micro Assembly Language Programming BBC & Electron BBC Basic User Guide for BBC Micro BBC BC Compendium BBC BC Compendium BBC BC Gorpendium BBC BC Huser Guide BBC BASIC for Beginners BBC Hardware Projects BBC Micro ROM Book BBC Micro ROM Book BBC Micro Disc Companion BBC Micro File Handling on BBC Wordprocessor Beginners Guide BBC Within the Micro BBC BSC Wordprocessor Beginners Guide BBC Wordprocessor Beginner Ge.95 Ge.95 BC Wordproc	BBCBasic	£5.95
Advanced User Guide for BBC Assembly Language Programming on BBC Micro Adventure into BBC BASIC Applied Assembly Lang. for BBC Assembler Routines for the 6502 Assembly Language Programming FOR the BBC Micro Assembly Language Programming FOR the BBC Micro Assembly Language Programming FOR the BBC Micro Assembly Language Programming On the BBC & Electron BBC & Electron BBC & Electron BBC & Gompendium BBC & Gompendium BBC & Huser Guide BBC BASIC for Beginners BBC BASIC for Beginners BBC Micro & the small Business BBC Micro & the small Business BBC Micro Advanced Ref. Guide BBC Micro Disc Companion BBC Micro File Handling on BBC Micro File Handling on BBC Micro File Handling on BBC Within the Micro BBC Wordprocessor Beginners Guide BBC Within the Micro BCP-M Bible CP-M For Guide CP-M File Start Son BBC Micro Disc Drive Projects for Micros Disc Fill NG SYSTEM (DFS) Operating Manual for BBC Disc Programming Techniques Disc System for the BBC Micro Exploring FORTH CR-M Complete FORTH CR	Advanced BASIC ROM User Guide	
Assembly Language Programming on BBC Micro Adventure into BBC BASIC Applied Assembly Lang, for BBC Assembler Routines for the 6502 Assembly Language Programming FOR the BBC Micro Assembly Language Programming FOR the BBC Micro Assembly Language Programming BBC & Electron BBC & Electron BBC BC Gompendium BBC B- User Guide BBC B- User Guide BBC B- User Guide BBC B- User Guide BBC Hardware Projects BBC Micro ROM Book BBC Master 128 High Flyer BBC Micro Advanced Ref. Guide BBC Micro File Handling on BBC User Guide BBC Wordprocessor Beginners Guide BBC Within the Micro BBC Wordprocessor Beginners Guide BBC Within the Micro BBC P-M B6 User's Guide CP-M Bible CP-M Bible CP-M Bible CP-M Bible CP-M Flosoftware BUS Creative graphics on BBC Micro Disc Creative graphics on BBC Micro Disc FluING SYSTEM (DFS) Operating Manual for BBC Disc Programming Techniques Disc System for the BBC Micro Exploring FORTH FORTH Character FORTH G6.95 FORTH Onthe BBC Micro Exploring FORTH FORTH Hothe BBC Micro Exploring FORTH FORTH Onthe BBC Micro Exploring FORTH FORTH Onth	Advanced User Guide for BBC	
Adventure into BBC BASIC Applied Assembly Lang. for BBC Assembler Routines for the 6502 Assembly Language Programming FOR the BBC Micro Assembly Language Programming BBC & Electron BBC & Electron BBC Basic ROM User Guide BBC BC Compendium BBC BL User Guide BBC BASIC for Beginners BBC BH User Guide BBC BASIC for Beginners BBC Micro & the small Business BBC Micro ROM Book BBC Master 128 High Flyer BBC Micro Advanced Ref. Guide BBC Micro File Handling on BBC Software Projects BBC Wordprocessor Beginners Guide BBC Wordprocessor Beginners Guide BBC Wordprocessor Beginners Guide BBC Wordprocessor Beginners Guide BC-M-Handbook with MPM CP-M-86 User's Guide CP-M Bible CP-M Flus Handbook CP-M Flus Handbook CP-M Frojects for Micro Disc Drive Projects for Micro Disc Programming Techniques Disc System for the BBC Micro Exploring FORTH FORTH on the BBC Micro Exploring FORTH FO	Advanced Graphics with BBC Assembly Language Programming	£9.95
Applied Assembly Lang. for BBC Assembler Routines for the 6502 Assembly Language Programming FORthe BBC Micro Assembly Language Programming BBC & Electron BBC & Electron Basic ROM User Guide BBSC & Gompendium BBC BC Compendium BBC BASIC for Beginners BBC BASIC for Beginners BBC Micro & Hesmall Business BBC Micro & Hesmall Business BBC Micro ROM Book BBC Micro ROM Book BBC Micro Advanced Ref. Guide BBC Micro File Handling on BBC Wordprocessor Beginners Guide BBC Wordprocessor Beginners Guide BBC Wordprocessor Beginners Guide BBC Withinthe Micro BBCP LUser Guide CP-M Bible CP-M Bible CP-M Boble CP-M	BBCMicro	£11.50
Assembler Routines for the 6502 Assembly Language Programming FORthe BBC Micro Assembly Language Programming BBC & Electron Basic ROM User Guide Basic User Guide for BBC Micro BBC B Loser Guide for BBC Micro & for 5.595 BBC Micro ROM Book for 6.95 BBC Micro Advanced Ref. Guide for 6.95 BBC Micro File Handling on for 6.95 BBC Wordprocessor Beginners Guide for Micro for for for for for for for for for f	Applied Assembly Lang. for BBC	
Assembly Language Programming on the BBC & Electron £8.95 Basic ROM User Guide £11.95 Basic User Guide for BBC Micro £10.00 BBC BC Compendium £5.95 BBC BH User Guide £14.95 BBC BH User Guide £14.95 BBC BASIC for Beginners £7.95 BBC Forth £7.50 BBC Micro & the small Business £5.75 BBC Micro ROM Book £10.95 BBC Micro ROM Book £10.95 BBC Micro Advanced Ref. Guide £10.95 BBC Micro Disc Companion £8.95 BBC Micro File Handling on £6.95 BBC Wordprocessor Beginners £13.95 BBC Wordprocessor Beginners Guide £13.95 BBC Within the Micro £13.95 BCP-L User Guide £19.95 CP-M Bible £16.50 CP-M Bible £16.50 CP-M Bible £16.50 CP-M Flus Handbook £13.95 CP-MSoul of £13.95 CP-MSoul of £13.95 CP-MSoul of £13.95 CP-MThe software BUS £8.95 Creative graphics on BBC Micro £13.95 Disc Filling SYSTEM (DFS) Operating Manual for BBC Disc Programming Techniques £19.95 Disc System for the BBC Micro £19.95 Disc System for the BBC Micro £19.95 CP-MICTO BBC Micro £19.95 Interfacing & Robotics on BBC £15.95 Interfacing & Robotics on BBC £15.95 Interfacing & Robotics on BBC £15.95 Introduction to COMAL £15.95 Introduction to COMAL £15.95 Introduction to PASCAL £17.95 Introduction to PASCAL £19.95 Introduction to PASCAL £19.	Assembler Routines for the 6502	
Assembly Language Programming BBC & Electron Basic ROM User Guide Basic User Guide for BBC Micro BBC BC Compendium BBC BL User Guide BBC BASIC for Beginners BC Forth BBC Hardware Projects BBC Micro & The Small Business BBC Micro & The Small Business BBC Micro & The Small Business BBC Micro Advanced Ref. Guide BBC Micro Disc Companion BBC Micro File Handling on BBC Wordprocessor Beginners Guide BBC Wordprocessor Beginners Guide BBC Within the Micro BBC Within the Micro BBC P-M Bible CP-M Bible CP-M Bible CP-M Bible CP-M Boul of CP-M Fus Handbook CP-M The software BUS Creative graphics on BBC Micro Disc Drive Projects for Micros DISC FILING SYSTEM (DFS) Operating Manual for BBC Disc Programming Techniques Disc System for the BBC Micro Exploring FORTH FORTH on the BBC Micro Exploring FORTH FORTH HORD Guide to BBC ROMs Graphs & Charts on BBC Micro Guide to BBC ROMs Graphs & Charts on BBC Micro Exploring FORTH FORTH on the BBC Micro Exploring FORTH FORTH on the BBC Micro Exploring FORTH FORTH on the BBC Micro Functional Forth for the BBC Micro Guide to BBC ROMs Graphs & Charts on BBC Micro Hackers Handbook - New Interfacing & Robotics on BBC Introduction to COMAL Introduction to COMAL Introduction to FORTH FORTH Ge.95 Introduction to FORTH FORTH	FOR the BBC Micro	£8.95
Basic ROM User Guide Basic User Guide for BBC Micro BBC B Compendium BBC B + User Guide BBC BASIC for Beginners BBC BASIC for Beginners BBC Micro & the small Business BBC Micro & the small Business BBC Micro ROM Book BBC Master 128 High Flyer BBC Micro Advanced Ref. Guide BBC Micro Disc Companion BBC Micro File Handling on BBC Wordprocessor Beginners Guide BCP-M Beb User Guide Complete FORTH CP-M-86 User's Guide CP-M Bible CP-M Bibl	Assembly Language Programming	on the
BBC BC Grompendium BBC B+ User Guide BBC BASIC for Beginners BC Forth BC Hardware Projects BBC Micro & the small Business BBC Micro & the small Business BBC Micro Advanced Ref. Guide BBC Micro Disc Companion BBC Micro File Handling on BBC Wordprocessor Beginners Guide BBC Wordprocessor Beginners Guide BBC Within the Micro BBC Within the Micro BCP-M-86 User's Guide CP-M-86 User's Guide CP-M Bible CP-M Flus Handbook CP-M Flus Handbook CP-M Flus Handbook CP-M Flus Growphics on BBC Micro Disc Drive Projects for Micros Disc Programming Techniques Disc System for the BBC Micro Exploring FORTH FORTH Charles BC Micro Exploring FORTH FORTH G6.95 Disc Programming Techniques Disc System for the BBC Micro Guide to BBC ROMs Graphs & Charts on BBC Micro Guide to BBC ROMs Graphs & Charts on BBC Micro Hackers Handbook - Mackers - Mackers Gespon - Mackers Guide to BBC ROMAL - Mastering Romand - Mastering Assembly Code - Mastering CP-M - Master Reference Manual Part 1 - Master Reference Manual Part 2 -	Basic ROM User Guide	
BBCB+User Guide BBCBASIC for Beginners BBC Forth BBC Hardware Projects BBC Micro & the small Business BBC Micro ROM Book BBC Master 128 High Flyer BBC Micro Disc Companion BBC Micro File Handling on BBC Software Projects BBC Wordprocessor Beginners Guide BBC Software Projects BBC Within the Micro BBC User Guide Complete FORTH CP-M-86 User's Guide CP-M Handbook CP-M Flus H	Basic User Guide for BBC Micro	£10.00
BBC Forth BBC Hardware Projects BBC Micro & the small Business BBC Micro ROM Book BBC Master 128 High Flyer BBC Micro Disc Companion BBC Micro Disc Companion BBC Micro File Handling on BBC User Guide BBC Wordprocessor Beginners Guide BBC Within the Micro BBC Within the Micro BBC User Guide BCP-User Guide CP-M Bible CP-M Bible CP-M Bible CP-M Bible CP-M Soul of CP-M Flus Handbook CP-M Flus H	BBCB+UserGuide	£14.95
BBC Hardware Projects BBC Micro & the small Business BBC Micro ROM Book BBC Master 128 High Flyer BBC Micro Disc Companion BBC Micro File Handling on BBC Software Projects BBC Wordprocessor Beginners Guide BBC Within the Micro BBC Within the Micro BBC User Guide CP-M-86 User's Guide CP-M-86 User's Guide CP-M Handbook with MPM CP-M-86 User's Guide CP-M Handbook with MPM CP-M-980 User's Guide CP-M Handbook with MPM CP-M Soul of CP-M Soul of CP-M Flus Handbook CP-M Soul of CP-M Flus Handbook CP-M Soul of CP-M Flus Handbook	BBCBASICfor Beginners BBCForth	£7.95
BBC Micro ROM Book BBC Master 128 High Flyer BBC Micro Advanced Ref. Guide BBC Micro Disc Companion BBC Micro File Handling on BBC Software Projects BBC Wordprocessor Beginners Guide BBC Within the Micro BBC Within the Micro BBC User Guide BBC Wordprocessor Beginners Guide BBC Within the Micro BCPL User Guide CP-M - 86 User's Guide CP-M - 86 User's Guide CP-M Handbook with MPM CP-M Flus Handbook Fla.95 Creative graphics on BBC Micro Disc Fill NG SYSTEM (DFS) Operating Manual for BBC Disc Flus GySTEM (DFS) Operating Manual For BBC Disc Flus GySTEM (DFS) Operating Manual For BBC Micro Flus Guide to BBC Micro Flus Guide G	BBC Hardware Projects	£8.95
BBC Master 128 High Flyer BBC Micro Advanced Ref. Guide BBC Micro Disc Companion BBC Micro File Handling on BBC User Guide BBC Software Projects BBC Wordprocessor Beginners Guide BBC Within the Micro BBCPL User Guide CP-M-86 User's Guide CP	BBC Micro & the small Business BBC Micro ROM Book	
BBC Micro Disc Companion BBC Micro File Handling on BBC User Guide BBC Software Projects BBC Wordprocessor Beginners Guide BBC Within the Micro BCPL User Guide Complete FORTH Complete FORTH Complete FORTH CP-M-86 User's Guide CP-M Bible CP-M Bible CP-M Bible CP-M Bible CP-M For Mius Handbook For Mius	BBC Master 128 High Flyer	£10.95
BBC Micro File Handling on BBC User Guide BBC Software Projects BBC Wordprocessor Beginners Guide BBC Within the Micro BBCPL User Guide CP-M-86 User's Guide CP-M-86 User's Guide CP-M Bible CP-M Bible CP-M Bible CP-M Bible CP-M Soul of CP-M	BBC Micro Advanced Ref. Guide BBC Micro Disc Companion	
BBC Software Projects BBC Wordprocessor Beginners Guide BBC Within the Micro BCPL User Guide CP-M-86 User's Guide CP-M-86 User's Guide CP-M-86 User's Guide CP-M Bible CP-M Bibl	BBC Micro File Handling on	£6.95
BBCWithinthe Micro BCPL User Guide Complete FORTH Complete FORTH CP-M-86 User's Guide CP-M Bible CP-M Bible CP-M Bible CP-M Bible CP-M Finandbook CP-M Finandb	BBC Software Projects	
BBC Within the Micro BCPL User Guide Complete FORTH CP-M-86 User's Guide CP-M-86 User's Guide CP-M-Bible CP-MBible CP-MPlus Handbook CP-MPlus Handbook CP-MThe software BUS CP-MThe software BUS CREATING SYSTEM (DFS) DISC FILING SYSTEM (DFS) Operating Manual for BBC Disc Programming Techniques Disc System for the BBC Micro Exploring FORTH FORTH or the BBC Micro Guide to BBC ROMs Graphs & Charts on BBC Micro Hackers Handbook-New Graphs & Charts on BBC Micro Hackers Handbook-New Introduction to COMAL Introduction to COMAL Introduction to COMAL Introduction of COMAL Intr	BBC Wordprocessor Beginners	
Complete FORTH CP-M-86 User's Guide CP-M-Bible CP-M-Bible CP-MHandbook with MPM CP-MPlus Handbook CP-MHos oftware BUS CP-MThe software BUS CP-MThe software BUS Creative graphics on BBC Micro Disc Drive Projects for Micros DISC FILING SYSTEM (DFS) Operating Manual for BBC Disc Programming Techniques Disc System for the BBC Micro Exploring FORTH FORTH 66.95 Graphs & Charts on BBC Micro Hackers Handbook - New Interfacing & Robotics on BBC Introduction to COMAL Introduction to LOGO Introduction to FORTH Introduction for FO	BBCWithintheMicro	
CP-M-86 User's Guide CP-M Bible CP-M Bible CP-M Handbook with MPM CP-M Plus Handbook CP-M Soul of CP-M Soul o		
CP-MHandbook with MPM CP-MPlus Handbook CP-MPlus Handbook CP-MSoul of CP-MThe software BUS Creative graphics on BBC Micro Disc Drive Projects for Micros Disc FILING SYSTEM (DFS) Operating Manual for BBC Disc Programming Techniques Disc System for the BBC Micro Exploring FORTH FORTH for the BBC Micro Functional Forth for the BBC Micro Guide to BBC ROMs Graphs & Charts on BBC Micro Hackers Handbook - New Introduction to COMAL Introduction to COMAL Introduction to COMAL Introduction of COMAL Introduction	CP-M-86 User's Guide	£19.95
CP-MPlus Handbook CP-MSoul of CP-MSoul of CP-MThe software BUS Creative graphics on BBC Micro Disc Drive Projects for Micros Disc FiLING SYSTEM (DFS) Operating Manual for BBC Disc Programming Techniques Disc System for the BBC Micro Exploring FORTH FORTH on the BBC Micro Guide to BBC ROMs Graphs & Charts on BBC Micro Hackers Handbook - New Interfacing & Robotics on BBC Introduction to COMAL Introduction OMAL ISO-PASCAL Ference Manual LISP 2nd Edition LISP 2nd Edition LISP 2nd Edition LISP ABeginners Guide to LISP the Language of Artificial Intelligence Logo Programming Mysteries of DISC DRIVES and DFS REVEALED Mastering Assembly Code Mastering Master Reference Manual Master Reference Manual Part 1 Master Reference Manual Part 2 Master Reference Manual Part 2 Master Reference Manual Part 2 Micronet Handbook Micronet Handbook 13.95 6.95 6.95 6.95	00 4411	
CP-MThe software BUS Creative graphics on BBC Micro Disc Drive Projects for Micros DISC FILING SYSTEM (DFS) Operating Manual for BBC Disc Programming Techniques Disc System for the BBC Micro Exploring FORTH FORTH on the BBC Micro Functional Forth for the BBC Micro Guide to BBC ROMs Graphs & Charts on BBC Micro Hackers Handbook - New Interfacing & Robotics on BBC Introduction to COMAL Introduction to FORTH ESO-PASCAL Reference Manual LISP 2nd Edition LISP, A Beginners Guide to LISP the Language of Artificial Intelligence Logo Programming Mysteries of DISC DRIVES and DFS REVEALED Mastering Assembly Code Mastering Music Master Reference Manual Part 1 Master Reference Manual Part 2 Master Reference Manual Part 2 Master Reference Manual Part 2 Micronet Handbook 66.95	CP-M Plus Handbook	£13.95
Creative graphics on BBC Micro Disc Drive Projects for Micros DISC FILING SYSTEM (DFS) Operating Manual for BBC Disc Programming Techniques Disc System for the BBC Micro Exploring FORTH FORTH on the BBC Micro Functional Forth for the BBC Micro Guide to BBC ROMs Graphs & Charts on BBC Micro Hackers Handbook - New Introduction to COMAL Introduction to COMAL Introduction to COMAL Introduction of COMAL ISP SO-PASCAL Reference Manual ISP 2nd Edition LISP, A Beginners Guide to LISP, B Beginners Guide t		
DISC FILING SYSTEM (DFS) Operating Manual for BBC Disc Programming Techniques Disc System for the BBC Micro Exploring FORTH FORTH on the BBC Micro Guide to BBC ROMs Graphs & Charts on BBC Micro Hackers Handbook - New Interfacing & Robotics on BBC Into View Introduction to COMAL Introduction to LOGO Introduction to LOGO Introduction to FORTH Introduction to FORTH ESSONACAL ESSONACA ES	Creative graphics on BBC Micro	£7.50
Disc Programming Techniques Disc System for the BBC Micro Exploring FORTH FORTH on the BBC Micro FUNCTIONAL FORTH Guide to BBC ROMS Graphs & Charts on BBC Micro Hackers Handbook - New Interfacing & Robotics on BBC Introduction to COMAL Introduction to COMAL Introduction to LOGO Introduction to LOGO Introduction to FORTH Introduction to PASCAL ISO-PASCAL Reference Manual LISP 2nd Edition LISP, A Beginners Guide to LISP the Language of Artificial Intelligence Logo Programming Mysteries of DISC DRIVES and DFS REVEALED Mastering Assembly Code Mastering GP-M Mastering Music Master Reference Manual Master Reference Manual Part 1 Master Reference Manual Part 2 Micronet Handbook 6.95	DISC FILING SYSTEM (DFS)	15.45
Disc System for the BBC Micro		
FORTH on the BBC Micro Functional Forth for the BBC Micro Guide to BBC ROMs Graphs & Charts on BBC Micro Hackers Handbook - New Interfacing & Robotics on BBC Into View Introduction to COMAL Introduction to LOGO Introduction to LOGO Introduction to FORTH Introduction to PASCAL ISP 2nd Edition LISP 2nd Edition LISP, A Beginners Guide to LISP the Language of Artificial Intelligence Logo Programming Mysteries of DISC DRIVES and DFS REVEALED Mastering Assembly Code Mastering GP-M Mastering Music Master Reference Manual Master Reference Manual Part 1 Master Reference Manual Part 2 Micronet Handbook 65.95	Disc System for the BBC Micro	
Functional Forth for the BBC Micro Guide to BBC ROMs E9.95 Graphs & Charts on BBC Micro F7.50 Hackers Handbook - New F6.95 Interfacing & Robotics on BBC F15.95 Introduction to COMAL F9.50 Introduction to LOGO F6.95 Introduction to LOGO F6.95 Introduction to FORTH F8.95 Introduction to FORTH F8.95 Introduction to PASCAL F17.95 F5.95 Introduction to PASCAL F17.95		
Graphs & Charts on BBC Micro #7.50 Hackers Handbook - New #6.95 Interfacing & Robotics on BBC #15.95 Introduction to COMAL #9.50 Introduction to LOGO #6.95 Introduction to LOGO #6.95 Introduction to FORTH #8.95 Introduction to FORTH #8.95 Introduction to PASCAL #17.95 ISO-PASCAL Reference Manual #1.95 LISP 2nd Edition #14.95 LISP 2nd Edition #14.95 LISP the Language of Artificial Intelligence #9.95 LOGO Programming #9.95 Mysteries of DISC DRIVES and DFS REVEALED #5.95 Mastering Assembly Code #8.95 Mastering CP-M #17.95 Mastering Music #6.95 Master Reference Manual Part 1 #14.00 Mister Reference Manual Part 2 #14.00 Micronet Handbook #6.95	Functional Forth for the BBC Micro	£5.95
Hackers Handbook - New		
IntroView	Hackers Handbook - New	£6.95
Introduction to LOGO		
Introducing 'C'		£9.50
Introduction to FORTH		
Introduction to PASCAL F17.95 ISO-PASCAL Reference Manual F9.95 LISP 2nd Edition F14.95 LISP, A Beginners Guide to F10.95 LISP, A Beginners Guide to F10.95 LISP the Language of Artificial Intelligence F9.95 F9.		
LISP 2nd Edition £14.95 LISP, ABeginners Guide to £10.95 LISP the Language of Artificial Intelligence £9.95 Artificial Intelligence £9.95 Mysteries of DISC DRIVES and DFS REVEALED £5.95 Mastering Assembly Code £8.95 Mastering GP-M £17.95 Mastering Music £6.95 Mastering the Disc Drive £7.95 Master Advance Reference Manual Part 1 £14.00 Master Reference Manual Part 2 £14.00 Micronet Handbook £6.95	Introduction to PASCAL	£17.95
Artificial Intelligence	LISP 2nd Edition	
Artificial Intelligence	LISP, A Beginners Guide to	
Logo Programming £9.95 Mysteries of DISC DRIVES and DFS REVEALED £5.95 Mastering Assembly Code £8.95 Mastering CP-M £17.95 Mastering Music £6.95 Mastering the Disc Drive £7.95 Master Advance Reference Manual Master Reference Manual Part 1 £14.00 Master Reference Manual Part 2 £14.00 Micronet Handbook £6.95	Artificial Intelligence	£9.95
REVEALED £5.95 Mastering Assembly Code £8.95 Mastering CP-M £17.95 Mastering Music £6.95 Mastering the Disc Drive £7.95 Master Advance Reference Manual Part 1 £14.00 Master Reference Manual Part 2 £14.00 Micronet Handbook £6.95	Logo Programming	
Mastering CP-M £17.95 Mastering Music £6.95 Mastering the Disc Drive £7.95 Master Advance Reference Manual Master Reference Manual Part 1 £19.95 Master Reference Manual Part 2 £14.00 Micronet Handbook £6.95	REVEALED	
Mastering Music £6.95 Mastering the Disc Drive £7.95 Master Advance Reference Manual £19.95 Master Reference Manual Part 1 £14.00 Master Reference Manual Part 2 £14.00 Micronet Handbook £6.95		£8.95
Master Advance Reference Manual £19.95 Master Reference Manual Part 1 £14.00 Master Reference Manual Part 2 £14.00 Micronet Handbook £6.95	Mastering Music	£6.95
MasterReference Manual Part 1 £14.00 MasterReference Manual Part 2 £14.00 Micronet Handbook £6.95		
Micronet Handbook £6.95	Master Reference Manual Part 1	£14.00
	Micronet Handbook	£6.95
	Points of View	

	and the latest terminal and th
Programming the 6502	£16.95
Programming the Z80	£19.95
Structured Basic	£7.95
Structured Prog. with BBC BASIC	£6.50
The Complete FORTH	£6.95
The Epson FX-KAGA PRINTER	
CommandsREVEALED	£5.95
Turtle Graphics on BBC Micro	£7.50
Using Floppy Discs with BBC Micro	£5.95
View3.0UserGuide	£10
View Guide View Guide	£4.50
Viewsheet User Guide	£10
Viewstore User Guide	£10
Using BBC Basic	£4.95
Wordprocessing BBC	2
Beginners Guide	£7.95
Wordstar & CP/M made easy	£7.45
Wordwise + A User Guide	£9.95
Z80 Applications	£15.95
Z80 Assembly Language	2.0.00
Programming	£19.95
Z80 Reference Guide	£9.95
	20.00

EPROM PROGRAMMER



The Watford Electronics' EPROM programmer for the BBC micro is a high quality self contained package. Programs all popular EPROMs from 2K to 16K: 2716, 2516, 2532, 2564, 2764 and 27128. All manufacturers' specifications have been followed to program EPROMs at the correct speed — wrong timings could destroy your EPROMs. The unit has its own power supply so does not put heavy loads on the BBC power supply as do some other units. Connects directly to the 1MHz bus following all Acorn recommendations on addressing and bus loadings.

SOFTWARE PACKAGE

SOFTWARE PACKAGE
The software is supplied on an EPROM which
plugs into the Micro and is instantly available
with a single command (no time wasting as on
Cassette-disc loading). It is a fully purpose
designed and ingegrated package to simplify
ROM development. The system is menu driven
with many prompts to avoid any socidents. with many prompts to avoid any accidents.

Software facilities include:
Load File – Save File – Down Load EPROM –
Program EPROM – Verify – Blank Check –
Editing of memory contents prior to
programming.
Also included is an automatic system to allow
Basic programs to be put in EPROM and
accessed through the *ROM filling system. More
than one program may be put in an EPROM. All
these facilities and more are explained in the
comprehensive and clear 15 page manual.

SPECIAL OFFER £69 (£3 carr.)

TEX EPROM ERASERS

EPROMs need careful treatment if they are to survive their expected lifetime. Over erasure of EPROMs very rapidly turns them into ROMs! The TEX erasers operate following the manufacturers specifications to give the maximum possible working life by not erasing too fast. We use these erasers for all our own erasing work.


• ERASER EB – Standard version erases up to 16 chips.

• ERASER GT – Deluxe version erases up to 18 chips. Has automatic safety cut-off to switch off the UV lampwhen opened.

• Spare UV tubes.

£30 (carr£2)

BEEB VIDEO DIGITISER



Using any source of composite video (colour or monochrome) and the Watford Beeb Video Digitiser, you can convert an image from your camera into a graphics screen on the BBC

This uses the full graphics capacity of the BBC micro in modes 0, 1 or 2. The video source may be a camera, video recorder or television, and is connected via the video output socket.

Images produced can be compressed, stored to disc, printed on an Epson compatible printer, directly used to generate graphics, analysed for scientific and educational use or converted to other formats e.g. Slow Scan TV or receiving a picture from a remote camera using a modem.

The output from the digitiser exactly matches the graphics capability in each mode, with up to 8 levels of grey in mode 2. The unit connects into the User Port and automatically scans a complete picture in 1.6 seconds.

Both the black and white levels can be adjusted manually for the optimum picture, or switched to automatic for unattended use. The image produced can be reversed if necessary.

Follicontrolling software is supplied on a normal sideways ROM and this is easily accessed via additional * commands. The package is designed to allow easy input of complex screens and give full access of the data to the user. Once on the screen, the image can be used as a normal graphics screen, allowing any of the usual graphics commands in BASIC or other ROM's to work on it.

A special print dump routine is included with the driver programs. This is specially designed to produce a fast, correctly proportioned picture, with reduced "contouring", resulting in an accurate reproduction of the original image.

Detailed examples of driving this unit from BASIC or other languages are all provided in the extensive manual supplied.

£109 (Carr. £3)

(Price includes) Digitiser Unit, Software in ROM & a Comprehensive Manual) (BBC B+ and Master compatible, except Master with Econet)

Magazine Maker

(As seen on TV)
A combination of the AMX Pagemaker and
Watford's Beeb Video Digitiser.
Using any video that provides a composite
signal and the digitiser, images from a camera
or TV can be converted into a graphics screen
on the BBC Micro.

on the BBC Micro.
They can then be used within AMX
Pagemaker to illustrate magazines or
newsletters — in fact anything that needs to be
created on A4 size paper.
With Pagemaker's many features, a variety of
pictures can be composed — the only limit being
the imagination.
Pictures can be doctored using Pagemaker's
graphics option to produce any number of
effects.

Text can be formatted around the digitised photo on screen using the facilities available, which include 16 typefaces, character and pattern definer, text formatting and the ability to load in wordwise and viewfiles plus much

Once created the picture can be printed out. The Magazine Maker is suitable for any use that requires illustrated documents.

Complete Package £129.00 (carr. £3)

VOLTMACE JOYSTICKS

Delta 3B Single Joystick Delta 3B Twin Joysticks Delta 14B Single Joystick Delta 14B/1 Adaptor Module Transfer Software Disc-Tape

ROM EXTRACTION TOOL

This extremely useful tool allows you trouble free chip removal from your computer by distributing the removal force over the whole body of any 24 or 28 pin chip.

Price: £2

ACORN MUSIC 500

BBC B, B+ & Master compatible.

You too can acquire this music package that has already thrilled thousands, for:

ONLY £49 (carr £3)

(included FREE with every unit, 'MU-500' software disc worth £6)

ATTACHE CARRYING **CASE for BBC Micro**

This attache carrying case is attractively finished in mottled antique brown leatherette. An ideal and safe way of carrying your BBC Micro around. Supplied with two Keys.

Price: £13 (£2 carr.)

28pinZIFSOCKET (Textool) £6.95

28pin DIL HEADER PLUG

SOLDER type IDCCRIMP type £1.50 £1.95

SPARES for BBC Micro

Keyboard	£46	Keystrip	£2
UHFModulator	£4	Case	£25
Speaker Grill	£1	Speaker	£2
Power Supply	£59	Keyswitch	£1.50

Replacement FLEXIBLE 17 way Keyboard Connector £3

8 WAY DIP SWITCHES

With these DIP switches soldered to their keyboard, any BBC B or B+ owner can take full advantage of the fast disc drives that we supply by configuring his BBC for fast disc drive operation

Excellent value for money at £1.00

CONNECTING LEADS

(All ready made and tested(CASSETTE LEADS 7 pin DIN Plug to5pinDINPlug + 1 Jack Plug to3pinDINPlug + 1 Jack Plug £2.00 £2.00 £2.50 to7pinDINPlug to3JackPlugs 6pinDINto6pinDINPlug(RGB) £2.00

DISC DRIVE POWER LEADS
Supply from BBC power supply to standard
Disc Drive connector.
Single £3.00 Dual £3.75

DISC DRIVE INTERFACE LEADS BBC to Disc Drives Ribbon Cable Single £4 Twin £6

MISCELLANEOUS CONNECTORS

	Plugs	Sockets
RGB(6PINDIN)	30p	45p
RS423 (5 pin Domino)	40p	50p
Cassette (7 pin DIN)	25p	65p
ECONET (5 pin DIN)	20p	30p
Paddles (15 pin 'D')	80p	200p
BBC Power Plug 6 way	80p	
Disc Drive Plug 4 way	75p	_
6way Power Connector		95p

Watford Dealer's List

UNITED KINGDOM

Badger Micros (Devon), Badger's Hill, Southerton, Ottery-St. Mary, Devon EX11 1SE. Tel: 0395 68516.

Beebug Retail, Dolphin Place, Holywell Hill, St. Albans.

Cambridge Computer Store, 4 Emmanuel St., Cambridge CB1 1NE. Tel: 0223 358264.

Cirkit Distribution Ltd, Park Lane, Broxbourne, Herts.

C.J.E. Micros, 78 Brighton Road, Worthing, West Sussex. Tel: 0903 213361.

Dennis Spitz Computers Inc, 86 Golders Green Road, London NW11.

Farnell Electronics, Canal Road, LEEDS LS12 Tel. 0532 636311.

HCCS, 575-583 Durham Road, Low Fell, Gateshead, Nr. Newcastle Upon Tyne. Tel. 091 4870760.

Mancomp Ltd, Printworks Lane, Levenshulme, Manchester. Tel: 061-224 1888-9888.

Microman Computers, Rainford Industrial Estate, Mill Lane, Rainford, St. Helens

Peartree Computers Ltd, St. Georges Street, Huntingdon Cambs.

Verospeed Ltd, Boyatt Wood, Eastleigh, Hants.

OVERSEAS DEALERS

*Absolute Electronics, Rewal House, 208-210 La Trobe Street, Melbourne, 3000, Victoria, Australia. Tel: (03) 663 2411.

Alpha Computer Co, Shop 314 Chi Fu Commercial Centre, Chi Fu Fa Yuen, Hong Kong, Tel: 5-506592.

Computer Distribution Company, Parklaan, 47, B09300 Aalst, Belgium.

E.B.N., Elisenstrasse 13, 1000 Berlin 41. Tel: (030) 7952057

Lendac Data Systems, Unit 31, IDA Enterprise Centre, Pearce Street, Dublin 12. Tel: 710796.

Scientex P.V.B.S., Zilversmidstraat 2, B-2000 Antwerpen, Belgium, Tel: 03 233 59 06

Techno-matic Data, Holbergsgade 19, 1057 Kobenhavn K, Denmark

*Velobyte, Scheaedyksadyk 5a-6a, 3011 EB Rotterdam, Holland, Tel: (010) 413 8197/414

Viking Tecno, Vestergade 12.1, 9620 Aalestrup, Denmark, Tel: 08 642522

*Acorn/Watford Referral Centres.

Viglen Console Unit

Enhance the appearance and convenience of your BBC Micro & Master with the Viglen console unit

BBC £42; Master £51 (carr. £4)

SURGE PROTECTOR Plug

Fitted in place of your normal mains plug, this device protects your equipment against mains surges. Nearby lightning strikes, thermostats switching and many other sources which put high voltage transient spikes on to the mains. This can lead to data corruption in memory and on disc and can result in spuriously crashing strikes. machines. A must for every computer user.

Protection for only £6.99

4 WAY MAINS DISTRIBUTION SOCKET



4 way top quality mains trailing sockets.
Supplied wired up with mains plug ready for use Can be screwed to floor or wall if required.
Very useful for tidying up all the mains leads from your peripherals. Allows the whole system to be switched on from one plug.

£8.95 (carr £1.50)

Now also available with a built-in surge Arrester, providing Protection for your complete

Spikes Cleaner Unit: £12.50 (carr £1.50)

CHIP SHOP

8271	£36		
DS3691	£3.50		
DS88LS120	£5.25	Acorn OS 1.2	£14
LM324	£0.45	Acorn OSB+	£25
SN76489	£5.50	Acorn BCPL	£42
SAA5050	£8.75	BCPL Calc Pack	£15
UPD7002	£4.40	BCPL Stand Alone	200
2764-250nS	£2.50	Generator	£36
27128-250nS	£2.75	BasicEditor	£22
27256	£3.95	ULTRACALC	£52
27512	£13	BROMPlus	£32
4013	60p	Buffer & Backup	£20
4020	£0.90	Beebmon	£22
4464	£8	Beebfont	£25
4816RAM	£1.75	Acorn COMAL	£36
6264LP-8K		Acorn FORTH	£32
RAM	£3.00	Acorn Graphics	£25
6502ACPU	£4.75	Graphics Extension	Hom
65C023M	£9.75	GXR-B	£21
65C12	£9	GXR-B+	£22
6512A	£10.00	AcornLISP	£35
6522	£3.40	AcornLOGO	£42
6522A	£5.00	ISOPascal	£42
6845SP	£6.00	ISO-Pascal Stand	620
68B50	£2.95	Alone Generator	£30
7438	40p	ICON Master	£28
74LS00	25p	Logotron LOGO	£62
74LS04	25p	Micro Prolog	£48
74LS10	25p	Microtext Disc Mini Office ROM	£47
74LS123	80p	ROMIT	£29
74LS163	70p	SerialULA	£13
74LS244	80p	VideoULA	£15
74LS245	£1.00	TERMULATOR	£25
74ALS245	£2.75 £1.00	MUROM	£21
74LS373	£1.00	SLEUTHROM	£23
74LS393	70p	STUDIO8Disc	£18
75453	700	Toolkit Plus	£31
ASSORT	FD	Communicator	£49
		Disassembler	£16
ROMS		HelpII	£27
	240	LIVIDIO I	OCCUPATION.

ACORNADES ACORNANES

Prices subject to change without notice and available on request. ALL OFFERS subject to availibility.

Mail Order and RETAIL SHOP. Trade and Export inquiries welcome.
Government and Educational Establishments' OFFICIAL ORDERS Accepted.

Shop Hours: 9.00am to 6.00pm. Monday to Saturday. Thursdays 9am to 8pm. (Free Customer's Car

VAT: UK customers please add 15% VAT to cost incl. Carriage.

CARRIAGE: Unless stated otherwise, minimum £1 on all orders. £2 on Larger items. On bulkier items, £7 Securicor charge applies. Overseas orders, carriage is charged at

Specifications of all products are given in good faith but is subject to change without notice. Some items vary in their availability. Please ring for latest delivery situation.

Vatford Electronics

JESSA HOUSE, 250, Lower High Street, WATFORD, ENGLAND Telephone: (0923) 37774; Telex: 8956095; FAX: 01 950 8989

Chico Link

HSV COMPUTER SERVICES LIMITED

ALL OUR PRICES INCLUDE CARRIAGE & VAT - NO EXTRAS TO PAY!

CONTINUOUS STATIONERY			QTY	
9.5" × 11" 60 GSM MICRO-PERF ALL EDGES TRUE A4 90GSM MICRO-PERF ALL EDGES	250 £295 £5.25	500 £4.95 £8.75	1000 £8.95 £14.95	2000 £14.95
TRUE A4 100 GSM VELLUM Micro Perf All Edges TRUE A4 100 GSM VELLUM Micro Perf all Edges (Cream, Blue or Grey)	£6.50 £7.25	£9.95 £13.50	£16.25 £25.50	
LABELS 3.5" × 1.5" (1 across) LABELS 4.0" × 1.5" (1 across) LABELS 4.0" × 1.5" (2 across) LABELS 2.75" × 1.5" (3 across)		£2.95 £3.25 £3.75 £2.75	£4.95 £5.50 £6.50 £4.50	£9.50 £10.50 £11.95 £8.50

PRINTER RIBBONS	Each
CANON PW1080/11863.95	2.95
CENTRONICS GLP3.95	2.95
CITIZEN 120DN/A	4.95
EPSON FX/MX/RX803.95	2.95
EPSON LX80/86	2.95
EPSON MX1003.95	2.95
JUKI 6100 S/SN/A	1.50
JUKI 6100 M/SN/A	2.50
MANNESMANN TALLY MT80/80+N/A	
OKI MICROLINE 80/82/832.50	1.50
PANASONIC KXP1090, 1080N/A	3.95
SEIKOSHA GP80N/A	2.75
SEIKOSHA GP100N/A	2.75

	Each
SHINWA CP80	N/A £3.95
STAR SG10/SG15	2.50 1.50
TAXAN KAGA	3.95 2.95

COLOURS AVAILABLE: RED, BLUE, GREEN, BROWN, PURPLE, ORANGE Please state when ordering

ACCESSORIES
PRINTER STANDS 80 COLUMN
SMOKED BROWN ACRYLIC FOR REAR OR
CENTRE FEED PRINTERS £14.95
TILT 'N' TURN MONITOR STANDS
12" MONITOR £12.95 14" MONITOR £14.95

	QUANTITY	10	20	30	40	50	100
3½ SS/DD	135TPI	15.50	30.00	44.00	57.00	70.00	135.00
DS/DD	135TPI	17.50	34.00	50.00	65.00	80.00	155.00
51/4 SS/DD	48TPI	5.95	11.00	16.00	21.00	25.00	45.00
DS/DD	48TPI	6.95	13.00	19.00	25.00	30.00	55.00
DS/QD	96TPI	7.95	15.00	22.00	29.00	35.00	65.00
UNIVERSAL	96TPI	8.95	17.00	25.00	33.00	40.00	75.00

NOTE: Universal disks are suitable for 40/80 track drives and have 2 notches and 2 holes.

ALL DISKS SUPPLIED IN CARDBOARD BOXES WITH WRITE PROTECT TABS, LABELS AND ENVELOPES AND COME WITH OUR NO QUIBBLE MONEY BACK OR REPLACEMENT GUARANTEE.

DISKETTE STORAGE BOXES	120×51/4" HINGED LID LOCKABLE 12.95
10×51/4" LIBRARY CASE1.25	10×31/2" LIBRARY CASE1.25
50×51/4" HINGED LID	30×3½" HINGED LID6.95
50×51/4" HINGED LID LOCKABLE7.95	40×31/2" HINGED LID LOCKABLE8.95
100×51/4" HINGED LID LOCKABLE11.95	80×31/2" HINGED LID LOCKABLE12.95



CREDIT CARD HOT LINE! (0256) 463507



HSV COMPUTER SERVICES LIMITED, 40 - 42 New Market Square, Basingstoke, Hants RG21 1HS (0256) 463507

Data Preparation

Computer Supplies



MICRO MUSIC

Save music in standard files with *Autumn* and play it as you program

David Acton

ith the creation of the BBC micro all those aeons ago, it was inevitable that micro music would take off. There are many advantages in having an instrument which can also add up. The potential market was soon taken up with the releases of various synthesizer-type packages. Since then, a vast variety of software and hardware has appeared for musical owners of Acorn machines.

If you scan the pages of the past year's Acorn Users you will find reviews spanning the whole spectrum, from the Music Pen ROM from CNC (September 1986) right up to the UM12B Sequencer (February 1986). You'll also find such programs as Tunemaker (March 1986) which proved to

be one of the most popular features we've ever carried.

So, for the benefit of all you budding computer-musicians out there, here is an issue devoted to you! If you're new to music, I suggest you type in David Lawrence's music editor, *Theme*. You'll find his article on page 86. A few hours' playing with *Theme* should open your eyes to the world of crotchets and quavers.

For users of the Music 500 system, we present *Sunrise-Sunset*, a composition by Bob Cornford-Wood. His article, with tips on using the 500, begins on page 90. And if there's anybody who hasn't turned the page, perhaps you'd like to read on . . .

There are three distinct and easily defined types of computer-musician who

read Acorn User. The first busily types in reams of data statements, patiently working into the wee small hours for that glorious moment of playback when all the seemingly meaningless figures metamorphose into a crisp three-part harmony. The second dreams of being a famous arcadegame creator, searching for the ideal jingle to play eternally as the hero of the piece leaps between platforms. Third, of course, is the musician true, with hardware addons that dwarf the little computer controlling them all.

Computers being the incompatible beasts they are, each of our three user types is limited to his or her own musical notation and standards, just as the computer-artist is very often restricted to









The Ultimate Maze Challenge

There are no random events in XOR's labyrinthine palace, and there is no premium on hand-eye coordination. You have all the time in the world to work out the precise nature of the hazards you encounter. Logical thinking, strategy and tactical problem solving are all part of the XOR experience. And XOR is not simply about finding solutions. If you can solve the entire puzzle (15 levels plus an encrypted anagram), you qualify to be a member of the Order of XOR. With a certificate and a badge to prove it.



"...this is one of the most compulsive, cunning and attractive programs I've seen for some time! the game is superb - a very classy original twist on the basic maze theme" A+B Computing

XOR's Features

- 15 graded mindbending mazes each maze approximately 16 screens

- super smooth high speed scrolling
 high resolution quality graphics
 high speed or step by step replay feature
- intriguing logical problems
- interactive dynamic puzzles

XOR MAZE GENERATOR

The XOR Maze Generator is a truly professional utility, in fact it's the very same generator we used to create the first collection of XOR puzzles. The package is fully menu driven and simple to use, the user simply places any predefined icons onto the



maze screen. Included in the package is an ICON DESIGNER so that you can change the appearance of the game characters to baffle and delight your friends.

BBCB, B+, MASTER SERIES, **ELECTRON**

£12.95
£9.95
£9.95
£14.95
£11.95
£11.95

24 HOUR TELEPHONE ANSWERING SERVICE FOR ACCESS AND VISA **ORDERS**

Logotron Guarantee:

All orders dispatched within 5 days of receipt of order.

Faulty software will be replaced immediately.
Postage and Package Free.



whichever graphics package he or she prefers. This is a shame because it means that the only users who can share their music are those who use the same systems.

With the huge range of musical additions available for Acorn machines, what is needed is a standard way of saving music to tape or disc.

Introducing Autumn

In a brave attempt to put things to rights, Acorn User has brought forth a standard called Autumn, the 'Acorn User Tune and Music Notation'. I must credit the poetic fingers of one David Lawrence for the acronym. Autumn is a simple method of storing notes on tape, disc or network. Before we look at Autumn in more detail, it is worth looking at how sound is generated in Basic.

The Basic command for generating a note is SOUND and is used as follows:

SOUND voice, volume, pitch, duration That is, four numbers are required for each note. You may assume that four bytes would be required to store each note in an *Autumn* music file. This would make tune files rather long, so any means of reducing the number of bytes required is worth considering. Certainly a byte is required for pitch and another for duration. These are the two essentials for every note.

If we ignore special sound effects like white noise, we know that the voice parameter of the SOUND command will be one, two or three since both the BBC micro and Master have three music channels. But if we have a piece of music in three-part harmony and store it in a way such that all of the notes for voice one are in one block, all those of voice two in another, and voice three another, we can forget about specifying a voice for each note. This is what happens in an Autumn file. The file is divided into three parts, one for each voice. At the start of an Autumn file there are three pointers indicating where in the file each voice begins.

As for volume, the number specified in a Basic SOUND command is either a straight amplitude (minus 1 down to minus 15) or an 'envelope' number. As you probably know, envelopes are devices used for various sound effects and have numbers to identify them. If we always use envelope one for voice one, envelope two for voice two and so on then we can forget about

Pointer to start of voice 1 Pointer to start of voice 2 Pointer to start of voice 3 Pitch, duration Pitch, duration Pitch, duration

Figure 1. The simple Autumn file

Byte	Function	
0	Pointer for voice one start	(low byte)
1	Pointer for voice one start	(high byte
2	Pointer for voice two start	(low byte)
3	Pointer for voice two start	(high byte
4	Pointer for voice three start	(low byte)
5	Pointer for voice three start	(high byte
6	Pitch, note one, voice one	
7	Duration, note one, voice on	ie
8	Pitch, note two, voice one	
i	255, termination pitch for vo	oice one
i+1	Pitch, note one, voice two	
i+2	Duration, note one, voice tw	0
j	255, termination pitch for vo	
k	255, termination pitch for vo	oice three

Figure 2. Autumn file specification

Pitch=1-239	Standard pitch, next byte is duration
Pitch=0	Rest
Pitch=254	Envelope - next 13 bytes are
	parameters
Pitch=240-253	Reserved for future enhancements

Figure 3. Autumn codes

another byte. Autumn doesn't include a volume/envelope byte for each note. If the volume or sound effect needs to be changed for a particular voice, then that voice's envelope is simply redefined.

So an *Autumn* file in its simplest form looks like figure 1 above. As with the SOUND command, duration is specified in twentieths of a second. Pitch is in the range zero to 255 but as you will see, certain pitches have been reserved for special *Autumn* meanings. You should refer to your the User Guide for a list of pitch numbers and the notes they produce.

Rests are achieved by using a pitch of zero. So the pair of bytes (0, 4) would switch off a voice for a duration of four-twentieths of a second. Pitches of 240 upwards are also reserved. A pitch of 255 indicates that the particular voice has finished performing and wants to go home.

A pitch of 254 specifies a change of envelope. In this case, the envelope corresponding to the voice is redefined using the 13 bytes following the code byte 254.

Having defined our standard music nota-

tion, what can we do with it? Let us suppose that a budding composer has knocked up a catchy tune on his Music 500 using Ample. His friend hears the tune and thinks it would sound good as a background to the game he's just written. By using Autumn, it would be possible to convert the Ample file into a form in which it would be possible to play in the background of the game.

We would of course need a means of conversion to take an Ample file and transform it into *Autumn* format. We hope to be carrying Ample/*Autumn* conversion programs in a future issue of *Acorn User*, and we hope lots of computer-musicians reading this will send us conversion programs for the music system that they prefer to use. We also need a means of playing the tune on the computer as a background, but as you will see (if you read on), this month's yellow pages contain just that.

The listings

To help familiarise you with Autumn, five listings are on this month's yellow pages.

Listing 1 generates an Autumn file. It contains a checksum to report any errors you may make. The file it will create is called 'SAMPLE'; have a fresh disc or cassette ready to receive it. The piece consists of the opening bars from J S Bach's French Suite No 4 in E Flat. Those of you wishing to hear the remaining bars will have to invest in this month's cassette or disc. And if you really want to put your micro to shame, I recommend a recording made by the pianist Andrei Gavrilov on the EMI label.

Listing 2 is a Basic program that plays back *Autumn* files. Simply enter the name of the file, the tempo required (one being the fastest, two being slower and so on) and whether or not you want the tune repeated. Run listing 2 and enter:

SAMPLE Return

1 Return

N Return

J S Bach should then do his stuff.

It should be fairly easy to understand how listing 2 works. The three sound channels are examined in turn to see if they are ready to accept any more notes. Each channel has its own little buffer, which can store up to five notes. The Basic function ADVAL is used to examine the buffers. PROCsound generates a note. If the pitch



5 PROGRAMS * FOR AGES FOR ALL PER VOLUME * 7 TO 13 YEARS * THE FAMILY *

Available for the BBC B, B+, Master 128 and Master Compact

- * Variety of content historical, environmental, mathematical
- Choice of levels and range of outcomes to ensure repeated use
- Designed as team games for all the family with no time limits
- Involve problem solving, decision making, planning strategies
- Maximise learning through discussion, "What will happen if .. ?" Include essential worksheets and
- program notes * Produced by the team whose programs are in thousands of

Volume 1 Program titles are:

- * Fletcher's Castle * Thorn Sea
- * Treasure * Money Target * The Perfume Hunter


Volume 2 Program titles are:

- * The Raiders * Island Yacht Race * Find The Question
- Can You Make It?
- * Deliver The Message

Volume 3 Program titles are:

- The Bordar's Daughter
- Ferry Captain * Bridges
- Market Stall
- * Name The Square

Each volume £24.95 incl. VAT and P&P - DISK ONLY



Compact Official orders welcome. Trade enquiries welcome. Orders and catalogue requests to

FERNLEAF EDUCATIONAL SOFTWARE



Fernleaf House, 31 Old Road West, Gravesend, Kent DA11 OLH Tel. 0474 359037 (24 hrs)



MUSIC PRINTING MID-SUSSEX SOFTWARE

The new music processor from Mid-Sussex Software produces printed

music to professional standards.

Music is quickly entered at the computer keyboard using an easily learned code and appears on the screen in exactly the same layout as it will appear on paper

Individual parts, piano parts or a score to demisemiquaver. Joined up quavers, semi-quavers and demisemiquavers. Clef signs (treble, bass, alto and tenor). Rests, key signatures, time signatures, bar lines. Dotted notes and dotted quavers joined to semiquavers etc. Double sharps,

Individual parts extracted from scores

Transposition.

Editing facilities

Minimum configuration - standard BBC, single disc drive, printer capable of 640 dot graphics mode.

* Send cheque for £49.95 stating 40 or 80 track disc or send for more details to:-Mid-Sussex Software, 11 Bridle Way, Crawley, West Sussex, RH10 4HP.

FLY IMC ON YOUR HOME MICRO With Micro Nav 2 Instrument Flight Navigation Simulator

For BBC B, B+, Electron, Master 128 & Compact

Fly a fully equipped light aircraft around Southern or Northern UK, using any Navaid or Runway as defined by the user. Save and reload up to 26 Navaid sets. Vary WX and turbulence to add to the challenge, and assess your skill using the 3D cockpit view and multi scale map displays of your track. Check morse idents as you fly from beacon to beacon. Built in printer dump for screen shots, maps or Navaid lists. Control is by joystick or keyboard.

Price £28 inclusive
State cassette 40t or 80t 5½ in disc. cheque with order to
Micro Nav, PO Box 24, Wokingham, Berks RG11 5BW.
TEL: 0734 794324



University Software

UNISTAT-II

MARK 2 STATISTICAL PACKAGE

*FULLY INTEGRATED SUITE OF STATISTICAL PROGRAMS * DEDICATED DATA PROCESSOR * AUTOMATED MISSING DATA HANDLING * USER DEFINED LABELS FOR VARIABLES * READING DATA FROM ASCII FILES * DIRECTION OF OUTPUT TO PRINTER OR ASCII FILES * HIGH-RESOLUTION PLOTS * COMPREHENSIVE USER MANUAL

HIGH-RESOLUTION PLOTS * C
UNISTAT DATA PROCESSOR: A spreadsheet designed exclusively for data handling. DATA
ENTRY: Cursor editing, overwrite/insert modes, continuous entry, insertion and deletion of cells,
cols and rows, go to, col labels. FILE HANDLING: Read, write and merge in internal and ASCII
format. COLUMN TRANSFORMATIONS: Formulas using cols as variables. Any combination of
+. -, *. / . LOG, EXP, SOR, ABS, SIN, etc. Operations with col numbers or labels.
STATISTICAL COMMANDS: SIZE, MIS (no of missing values in a col), SUM, SSQ, MEAN
(adjusted for missing values). Single or multi col sorting in asc or desc order. Ranks.
CONDITIONAL FORMULAS: Selection of cases, creation of dummy and effect vars, recoding,
breakdown, etc. Logical operators > . < . = , AND, OR, NOT.
MULTIVARIATE REGRESSION: Simple corr matrix, choice of dep var, selection of indep vars,
noconstant reg. Selection-specific missing data handling. No. of rows and cols omitted due to missing

noconstant reg. Selection-specific missing data handling. No. of rows and cols omitted due to missing values and multicollinearity. Output includes estimated coeffs, t-stats, std errors, R2, adjusted R2, std error of reg, F-stat, D-W stat, ANOVA of reg, var-covar and multiple corr matrices, interpolation, plot of residuals, plot of actual and fitted y values. Addition of residuals and/or fitted y

STATISTICAL TESTS: Significance levels for most test stats. Test-specific missing value handling. PARAMETRIC: One sample t, two sample t with equal and unequal vars, paired t, F. NON PARAMETRIC: Chi-sqr and Kolmogorov-Smirnov, (both with equal and unequal vars, paired t, F. NON PARAMETRIC: Chi-sqr and Kolmogorov-Smirnov, (both with equal and unequal exp freq versions), chi-sqr Bartlett, Mann-Whitney U for small, medium and large samples, Wilcoxon signed rank, Walsh, Wald-Wolfwitz runs. Kruskal-Wallis one-way ANOVA, Friedman pseudo two-way ANOVA, Jonckheere trend, Page's L, Cochran Q, Goodman-Kruskal gamma, Sommer's d. CORRELATION COEFFICIENTS: Pearson, Spearman's rho, Kendall's tau, Point biserial. Goodman-Kruskal gamma, Sommer's d, Yule's Q, phi, tetrachoric. DISTRIBUTIONS: Chi-sqr. t, F, Normal (std. non std), log, inverse and bivariate normal, binomial, negative binomial, exponential, hypergeometric, gamma function, Khrgian-Mazin.

DESCRIPTIVE STATISTICS: Analysis of raw data or data with freq counts. Raw data sorted and grouped. Freq dist with choice of lower bounds and class intervals. Absolute, cumulative and relative

grouped. Freq dist with choice of lower bounds and class intervals. Absolute, cumulative and relative freq. Histograms, scatter diagrams and time series plots. Output includes sum, mean, mean deviation, median, variance, std deviation, third and fourth moments, skewness, kurtosis, range, etc. ANALYSIS OF VARIANCE: One-way with and without repeated measures, two-way with no interaction, two-way and three-way with one, two and without repeated measures. TABULATIONS: CROSS-TABLUATION: Two-way tables with col and row totals and percentages. CHI-SQUARE CONTINGENCY TABLE: Observed freq, exp freq and chi-sqr for each cell. Col and row sums, overall chi-square stat and its significance level. Yates correction. HIGH RES PLOTS: All plots can be dumped on the printer. PLOT OF BIVARIATE REGRESSION: Scatter diagrams with optional line of best fit, intercept, slope, R2, std error, CURVE FITTING: Fitting of polynomials on bivariate data. Fitted polynomial coeff, R2 and std error. TIME SERIES PLOTS: Simultaneous plotting of up to 7 columns of data against time. PLOT OF FUNCTIONS: Simultaneous plotting of up to two functions, integrals, polynomials and roots of polynomials.

DEFAULT SETTINGS (For BBC version): Choice of screen and device control parameters. 40 or 80 column display, number of data drive 0/1/2/3, black & white or colour monitor width of printer. high-res screen dump command, maximum formula length, maximum number of columns and rows depending on free RAM.

LINTPRO Linear/Integer Programming Package.

Written by Dr D. Sprevak

A professional package which can solve very large problems on a 32K BBC micro by means of revised simplex algorithm and efficient vectorisation. It can solve a problem with 82 variables, 60 constraints and 15 upper bounds in 24 minutes. Runs faster on second processor, Plus or Master series. LINTPRO requires minimal prior knowledge of linear programming techniques and is ideal for real applications as well as for teaching purposes. Data entry in Backus-Naur notation. Selection of optimality of solutions between 0% and 100%. Optional printing of intermediary steps and choice of branching strategies. Output includes optimal values of variables, value of objective function, slackness, shadow prices and it can be directed to screen or to a text file

CPA Critical Path Analysis

Written by Dr J. S. Dean

A comprehensive coverage of critical path analysis sufficient for most practical applications. Activities and durations are supplied as input and earliest and latest start and finish times for each activity, total float and critical path are obtained as output. Easy editing of inputs provides the possibility of analysing the sensitivity of solutions. A built-in calendar can give dates to any programme. Resources can be allocated to each activity. Suitable smoothing scheme is chosen and a resource bar chart is drawn. Results can be directed to printer or to text files. High-res plot of the node structure can be dumped on printer.

UNISTAT-II, LINTPRO AND CPA ARE AVAILABLE FOR: BBC B, PLUS AND MASTER SERIES, AMSTRAD PCW8256, PCW8512, IBM PC/XT/AT AND COMPATIBLES BBC versions: UNISTAT-II: £125+ VAT, LINTPRO: £75+ VAT, CPA: £50+ VAT. AMSTRAD and IBM versions: UNISTAT-II: £150+ VAT, LINTPRO: £100+ VAT, CPA: £75+ VAT.

Prices include post & packing within the UK. Official (government, university, local authority) orders are welcome. For orders from Europe add £5, from outside Europe £10. For BBC versions please indicate 40 or 80 track format. Cheques and correspondence to: UNISOFT LTD, P.O. Box 383, Highgate, London N6 5UP.

is 254 though, PROCenv is called, to redefine an envelope. A pitch of zero is interpreted by PROCsound as meaning a rest and a pitch of 255 indicates that the voice has finished. PROCsound marks this fact using the array called d%.

You will notice that PROCenv doesn't contain an ENVELOPE command. Instead it uses a machine code routine called OSWORD which is employed by both SOUND and ENVELOPE. Instead of using ENVELOPE followed by 14 parameters, the parameters are stored in a block of memory called env% and OSWORD is called. One feature of PROCenv to note is the use of ADVAL to see if the given voice has completely run out of notes to play. If it hasn't, changing the envelope for that voice will affect the note currently being played. Premature modulation, perhaps.

It's not much use having to write a program like listing 1 to create an Autumn file though. If you have typed in David Lawrence's Music Editor (see yellow page index, 113) then you may have noticed option three on the filing menu. This will write your tune as an Autumn file. And this is how 'SAMPLE' was created.

Having worked out a means of creating and playing *Autumn* files we can progress to more adventurous things. Let's start with a bit of machine code. Listing 3 performs a similar task to listing 2 but is written in assembly language. Listing 3 contains a checksum routine for errorspotting, but all going well, it will save a program called 'PLAY'. PLAY is a command and should be used with the following syntax:

*PLAY «name» «address» «tempo»

If you are using cassette, type */PLAY instead of *PLAY.

The name should be the filename of an Autumn file. The address is a memory location in hexadecimal, rather like those used with *LOAD and *SAVE. This address is where the tune data will be loaded, so you can ensure that any tune you play will not interfere with a program you have in memory. The tempo is like that requested in listing 1; one being the fastest value. So, to play the sample file using memory from &2000 upwards for example, type:

*PLAY SAMPLE 2000 1 Return and J S Bach should do it again. What a durable chap he is – and with good reason.

The code for *PLAY is stored at &900 and zero-page locations &70 to &8F are used as workspace. The main program begins at '.play' and its first task is to interpret the parameters that you have typed after it. Should you give bad parameters, the error message 'Syntax' will appear on screen.

The pointers for each voice are set to the start of the tune by '.initpoint'. Sounds are generated by '.sound' and again, OSWORD is used. An 8-byte parameter block ('.note') is employed, two bytes corresponding to each of the parameters of a Basic SOUND command.

Envelopes are set up by '.env' and OSWORD is used once more, with a 14-byte parameter block at '.pars'. The number of free spaces in the voice's buffer is checked as in listing 2. This value is stored before hand in location 'free'.

Routines '.findspace' and '.skipspace' are used to pick out the various parameters that are typed after *PLAY.

Having taken the bold step into the realms of machine code, we can finally contemplate background music – playing a tune while another program is running.

Some of you may remember an article on playing music by 'events' from the January 1985 issue of *Acorn User* by Jonathan Lidgard (page 75). Events are a particularly useful feature of Acorn micros as they enable the programmer to stop whatever the computer is doing for a few moments (in this case fractions of a second), do something completely different, and then carry on as if nothing had happened. If you are not familiar with how events work, but think you might be interested, I suggest you get your hands on an *Advanced User Guide* and try studying chapter 12.

Having written *PLAY, we can make just a few changes and additions to achieve the same effect as Jonathan's program. The lines to change are given in listing 4 on the yellow pages. Once you have entered, checked, saved and run listing 3, add the extra lines of listing 4 and save the program with a different name.

A revised checksum is included for safety, but if you haven't made a mistake, the machine code program *EVENT will be saved on your tape or disc.

The syntax for using *EVENT is much the same as *PLAY. You have to be careful once you have used *EVENT. If you use it while a tune is playing in the background, some interesting events may ensue. Should anything untoward happen, just press CTRL-Break and try again. To play the sample tune in the background type something like:

*EVENT SAMPLE 2000 1 Return Again, cassette users should type */EVENT. Listing 5 tests *EVENT. With the sample tune playing in the background, it proceeds to produce some (by now, famous) recursive squares.

If you have written a program for a game, you could, in fact, play a tune in the background in a similar way. And of course, because the tune data is stored as an *Autumn* file, you can avoid having to work out the pitch value of each note. Simply use the *Music Editor* (see David Lawrence's article on page 86) to create your tune and then save it as an *Autumn* file using option three of the *Music Editor*'s filing menu.

Play your part

If you're a budding musician and programmer, and like the idea of *Autumn*, why not contribute? What we'd like to see are programs to convert other types of music file to and from *Autumn*. Any other programs that make use of *Autumn* files will also be of interest.

The formal layout of an *Autumn* file is given in figure 2. Figure 3 lists the code bytes which are currently defined. Remember that codes 240 to 253 are available for you to define. So you might like to use a code to indicate a passage is to be repeated for example.

If you don't think your programming skills are up to scratch, why not send us an *Autumn* file? We'd like to hear your compositions, and share them with other music enthusiasts. Don't forget that all published contributions will, of course, receive payment according to quality, as will any we carry on our monthly disc and cassette. (But we'd all do it for the love of music, I hear you sing.)

Programs, tunes and comments should be sent to: *Acorn User* Music File, c/o Redwood Publishing, 141-143 Drury Lane, London WC2B 5TF.

Happy music-making!

Turn to the yellow page index on page 113 to find David Acton's Autumn listing.



VARIATIONS ON ATHEME

Compose a three-part symphony on a BBC micro with our easy-to-use music editor, *Theme*

David Lawrence

ow could a special music issue go by without a music editor of some kind? Many people may have typed in our *Tunemaker* program (March 1986) and constructed some simple tunes, probably running into some of its limitations. *Theme* (The Music Editor) is essentially *Tunemaker* 2, and overcomes most of these problems.

Theme allows you to create tunes using the three sound voices, displaying all three on the screen at the same time for easy editing. It also caters for 'envelope' changes, key signatures, instant playback of all three voices and long-term storage of your masterpieces. The first two are the main improvements over Tunemaker, in which you could only use one voice and could not change notes once they had been entered. With Theme it is simplicity itself to enter even complicated pieces of music.

Using Theme

To use the editor, type in listing 1 and 2 on the yellow pages. When you have entered both listings, type CHAIN "MUSIC" to load and run *Theme*. The computer will assemble a piece of machine code, set up the user defined graphics and envelopes used by the program and chain the editor.

When it has loaded, you will be asked to enter the key signature – the number of sharps or flats at the beginning of the music. If there are none, just press Return. Otherwise, enter the number of sharps or flats (one to five) followed by S for sharps or F for flats, eg, enter 2S for two sharps

Cursor left: move cursor left Cursor right: move cursor right Cursor up: increase pitch/envelope number

Cursor down: decrease pitch/envelope number

Shift cursor left: move left one screen Shift cursor right: move right one

Shift cursor up: move cursor up screen (to different voice)

Shift cursor down: move cursor down screen (to different voice)

CTRL- cursor left: move to beginning of music

CTRL- cursor right: move to end of music

f0: demisemiquaver

f1: semiquaver

f2: quaver) With Shift, gives f3: crotchet) corresponding

f4: minim)
f5: semibreve)

f6: envelope marker S: accidental sharp

F: accidental flat N: accidental natural

N: accidental natura
O: cancel accidental

.: switch on/off dotted note

Return: sound note and move on

1–9: select tempo Tab: play music

Space: stop playing
Delete: delete current note

Delete: delete current note
I: insert before current note

@: filing menu

P: dump screen to printer

Table 1. Control keys for Theme

(D major). The screen will clear and you will be presented with the main editor screen (see figure 1), consisting of the three staves on which music can be entered, a status line at the top and a message window in the bottom right-hand corner.

The staves have both treble and bass clefs and will also contain the sharps or flats in the key signature, if relevant. Each stave represents a voice and, to start with, each contains one note. The edit cursor is positioned in the top left hand corner (this is note one of voice one). The cursor represents the range of pitches available in the editor (four octaves, from two octaves below middle C to two above). Although key signatures are catered for, neither time signatures nor bar lines are, and hence all sharps and flats must be included every time they occur.

The four grey cursor arrow keys on the right of the keyboard (along with Shift and Control) move the cursor. Use the left and right arrows to move forwards and backwards one note at a time, one screen (eight notes) at a time, or to the beginning and end of the music. Use the up and down arrows to move the current note up and down the stave (ie, change its pitch), and to move the cursor up and down the screen (ie, to the other voices). See table 1 for a full list of control keys.

Notes of different lengths can be selected with the function keys. The note lengths available vary from a demisemiquaver to a semibreve. Dotted notes are obtained by selecting the appropriate 'un-dotted' note and pressing the full stop. Pressing full



stop again will remove the dot. Accidentals can be added using S for a sharp, F for a flat, N for a natural and O to remove any accidental. Rests are obtained by pressing Shift along with the appropriate function key, ie, for a crotchet rest press Shift-f3 (or 'Shift-crotchet').

When you are happy with the length and pitch of a note, press Return. This will 'sound' the note, move the cursor right and will give you the next note to edit. This note will be exactly the same length and pitch as the last one. To edit this note (or any other) simply use the up and down cursors to change the pitch, the function keys to change the length, as before. Gaps can be left at any point on a stave (ie, there can be fewer than eight notes on a page).



Figure 1. The main editor screen

Envelope A: loud piano

Envelope B: middle piano Envelope C: quiet piano

Envelope D: loud sustain

Envelope E: middle sustain

Envelope F: quiet sustain

Envelope G: loud slow fade

Envelope H: quiet slow fade

Envelope I: slow vibrato

Envelope J: fast vibrato

Envelope K: 'plink'

Envelope L:)

Envelope M:) Put your own definitions

Envelope N:) here after checksum is

Envelope O:) OK (currently all zero)

Envelope P:)

Table 2. Built-in envelopes

This enables you to line up notes correctly.

If you put a note in that you didn't mean to, move the cursor over it and press Delete. Note that you can't delete the first note in any voice. Notes can be inserted by PROCinit: Sets up all variables and arrays

FNgetkey: Inputs key signature

FNdouble(s\$): Prints s\$ in double height PROCflash(s%): Turns text cursor on/off PROCwindows: Sets up screen windoes

PROCscrn: Draws empty staves

PROCalter(key\$,nk%): Alters pitch values due to key signature

PROCpage(p%): Draws page p% of the music

PROCstave(st%): Draws stave st% PROCkeysig: Displays key signature

FNnumb(c%): Prints number of notes in voice c%

PROCcurs(st%,no%): Draws a cursor on stave st%, note no%

PROCI(In%): Draws a horizontal line at In%

PROCsl%(ln%): Draws a short horizontal line at ln%

PROCnote(st%,no%,pi%,du%,co%): Draws a note of pitch pi%, duration du% in colour co% on stave st%, note no%

PROCrest(st%,no%L%): Draws a rest length L% on stave st%, note no%

PROCd: Redraws lines behind a deleted rest

PROCshowe(st%,no%,num%): Shows envelope marker on stave st%, note no%

PROCgetvals: Gets pitch and duration of current note PROCedit: Main edit routine, get key pressed, etc

PROCdo: Execute procedure according to key pressed

PROCleft: Move cursor left note/page/music

PROCright: Move cursor right note/page/music PROCup: Increase pitch/envelope number

PROCdown: Decrease pitch/envelope number

PROCnewenv(in%): Add in% to envelope number and display

PROCeetnote: Get note length and display PROCgetrest: Get rest length and display

PROCnewnote(np%,nd%): Erase old note and display one pitch np%,

duration nd%

PROCnextone: Sound note and move on to next note

PROCplay: Play music

PROCsound(v%,p%,c%): Play a note on voice v%, pitch p%, duration d%

FNfindend(s%): Find last note in voice s% PROCaccident: Display specified accidental PROCdot: Add/remove dot from note PROCdelete: Delete current note

PROCinsert: Insert before current note

PROCsort: Redisplay current stave after delete/insert

PROCfile: Filing menu PROCsave: Save current music FNname: Input a filename

PROCload: Load new music

PROCfinal: Save current music in Autumn

PROCwrenv(d%): Writes out envelope d% in Autumn

PROCwrnote: Write a note to a file PROCtempo: Change tempo

PROCenvel: Insert an envelope marker

PROCdump: Dump screen

Table 3. Functions and procedures





Computaccount (UK) Ltd 21 Spring Hill Birmingham B18 7BH Tel 021 236 3455

We are major supplier to the educational and health sectors

Please send an SAE for our free extensive catalogue and price list. Hundreds of products listed at excellent prices.

ACORN

NEW MASTER COMPACT se system is 128K, single 3. bundled software.	ries. Standard 5 inch drive,
Compact entry system	£375.00
Compact TV system	£389.00
Compact with mono monito	r £459.00
Compact with colour monitor	or £589.00
RS 232 interface for compa	ct £26.00
Extra 3.5in drive for compa	ct£99.00
PAL TV adaptor for compa	ct£26.00
Master 128	£399.00
Master ET	£325.00
Master econet module	£43.47
Turbo upgrade	£108 00
64K upgrade kit	£34.74
Master 512K upgrade	£199.00
Z80 2nd processor with sof	tware
6502 2nd processor 10 Mbyte Hard disc with file	£346.00
6502 2nd processor	£173.00
10 Mbyte Hard disc with file	
	£1086.95
30 Mbyte Hard disc with file	server
	£1608.95
Prestel receiver	£120.00
Eprom cartridges	£13.00
Acorn DNFS kit	£82.60
1770 upgrade kit	£43.42
ADFS ROM ATPL Sideways RAM/ROM	£26.04
ATPL Sideways HAM/ROM	board
CONCERT K	239.00
CONCEPT Keyboard	£124.95
View manual Viewsheet manual	£10.00
viewsneet manual	£10.00

SOFTWARE

Full range of professional CP/M and MSDOS/PCDOS software available at very attractive pricing.
Call for details on Wordstar, dBase, Lotus, Framework, Symphony, Javelin, Delta, Cobol, Sage and hundreds more!
Vast Range of BBC/Acorn software for Business & Education, Scientific and Industrial applications. Send SAE for full lists and catalogue.

ACCESSORIES

LISTING PAPER
All standard sizes available at very competitive prices. Single and multi-part.
LABELS
Various size, 1-across, 2-across, 3-across
RIBBONS
for most common printers. Foscom

for most common printers, Epsom, citizen, Star, Amstrad, Juki, Canon etc. CLEANING KITS
For UDU, disc drives and keyboards

AMSTRAD

NEW PC 1512: Prices start	at £449 for
basic single drive + mono n	nonitor sys-
tem. Phone for prices of other	er systems.
PCW 8256	£399.00
PCW 8512	£499.00
2nd disc drive for PCW8256	£155.00
Serial interface for PCW	£59.00
Modern with Chit Chat software	£169.00
Wordstar deluxe	260.00
Supercalc	£43.00
Sagesoft Popular Accounts Plus	£130.00
Dbase II	£103.00
3 inch discs for PCW's	£3.50

ROM SOFTWARE

200	
Acorn:	
View 2.1	£45.00
I View 3.0	663 00
ViewPlot (Disc)	£25.75
ViewSpell	633.50
Viewsheet	C45.00
Viewstore	C45.00
GXR (please state whether for E	
CAN (please state whether for t	
ISO Bosoni	£23.00
ISO Pascal	£52.00
LISP	£39.00
BCPL	£46.00
Logo	£52.00
ADFS	£26.04
Computer Concepts:	
Wordwise Plus	£40.00
Printmaster	£25.00
Accelerator	£48.00
Speech ROM	£27.50
Communicator	£51 30
InterWord	£48 00
Intersheet	C48.00
Interchart	C28 50
Beebugsoft:	120.50
Toolkit Plus	022.00
Wordease	COE 00
ICON master	£25.00
POMIT	129.00
ROMIT	£29.00
Help II ROM	£27.00
Sleuth ROM	£27.00
Exmon II	£28.00
Spellcheck III	£32.00
MUROM	£24.00
Pace:	
Commstar	£29.57
	Committee of the Commit

'TAILOR MADE' BUSINESS SYSTEMS

Tell us your requirement and we will make up a system for you.

FLEA MARKET

All items subject to availab	oility
EPROM programmer	£40.00
Programming software (RC	M)£5.00
EPROM eraser	£24.00
1200/75 Modem + Comm	
S	£35.00
RH Electronics Light Pen	for BBC with
software	£36.00
Torch Light Pen	£25.00
Plannercalc. Torch CPN for Masterplanner. Torch CPN	rmat £35.00 format
	£85.00

MONITORS

Mono:	
Sanyo DM4112	£75.00
Philips green Hi-res 7502	£76.00
Philips amber Hi-res 7522	£82.61
Zenith green Hi-res 1230	£85.00
Zenith amber Hi-res 1220	£85.00
Colour:	
Microvitec std-res 1431	
Microvitec med-res 1451	
Microvitec hi-res 1441	
Philips 8533 RGB Med-res +	composite
video	£251.00
Monitor cables (state types re	
	£3.50
Monitor bridge single height	£14.90
double height	218.90

PRINTERS

	THEFT
	DOT MATRIX Epson LX86 120 cps 80 col NLQ
	Epson FX800 **NEW**
	Epson LX80/86 tractor unit
	NLQ
	Olivetti DM280 80col NLQ 160cps
	Canon PW1080A NLQ 80col 160 cps £258.00 Brother 1109 Par. + Ser. 100cps +
	NI O cano no
	Brother 1409 Par. + Ser
	STAR. Full range stocked. Call for
	Star NL 10 serial NLQ 80 col 120cps £279.00 Star NL 10 parallel NLQ 80 col 120cps
	£239.00 Citizen 120D parallel 120 cps NLQ 80col £199.00
I	Citizen LSP10 120cps Eps/IBM comp NLO£225.00 Citizen MSP10E 160cps Eps/IBM comp
I	NLQ£296.00
	Panasonic KX-P 1080 £158,00 Panasonic KX-P 1090 £233,00 Panasonic KX-P 1092 £315,00 Panasonic KX-P 1592 £405,00 Micro-P MP165 NLQ £208,70 Micro-P MP200 + NEW+
I	Parallel printer cable BBC 59 00
I	Parallel printer cable IBM, etc from £15.00
I	DAISY WHEELS Sanyo PR3000£199.00
l	Brother HR10 £299.00
l	Brother HR15 £349.00 Brother HR25 £650.00
	Brother HR35 £825.00 Juki 6100 £247.75 Juki 6200 £454.00
	Juki 6300

Juki 2200 typewriter/printer.... **COMPACT SOFTWARE**

Revs 5	£16.95
Hits 1/Hits 2	£12.95
Pascal	.£59.00
Citadel	£12.95
Repton 2	£12.95
Karate Combat	£12 95
Strykers Run/Enhanced Strykers	£12 95
CrataForce	£12.95

AMX

Please state whether for BBC or	Master
AMX mouse with Super Art ROM	£78.00
Pagemaker	£43.43
Paintpot	£13.00
Desk	£21.70
Super Art ROM	£43.43
Database	£21.70
3D Zicon	£21.70
Utilities	£13.00

PRINTER ACCESSORIES

Enson EX 80/85 Tractor Unit C22 00
Epson FX 80/85 Tractor Unit£32.00 Epson FX 80/85 Sheet Feeder £125.00
Epson FX100/105 Sheet Feeder£139.00
Brother HR sheet feeder£209.00
Epson MX/RX/FX 80 Ribbons£3.75
Epson MX/HX/FX 100 Ribbons£4.50
Canon PW1080/1156 Ribbons £8.00
Taxan Kaga KP810 Ribbons £8.00
Citizen printer ribbons£3.99
All Epson Spares available£POA
Massive range of other compatible rib- bons available

DISC DRIVES

	Opus 5802 400k DS 40/80 track £109.00 Opus 5802DB dual 400k DS 40/80 track
	Opus 5802D dual 400k DS 40/80 with PSU£233.91
	Opus Challenger 256k £179,00 Opus Challenger 512k £199,00
	Opus DDOS kit£52.12 Pace PSD1P 100k 40T with PSU
	£125.00 Pace PSD3P 400k 40/80T with PSU
	£144 00
Ì	PSU£260.00
	mounted in monitor stand £266.00
	Cumana CSX100 100k SS 40T £99,00 Cumana CS100 100k SS 40T with PSU
	£122 00
	PSU£152.00
	with PSU£282.00
	£121.70
	Pace PDD3P dual 400k 40/80T wit PSU

DISCS

Compu	tacount Dis	sks -	5.25"	in st	urdy
SS DD	48 tpi			F	R 50
DS DD	48 tpi			5	9.50
DS DD	96 tpi			£10	0.50
time wa	3M high o	s)			
SSD 48	tpi Ref 744	1		£10	0.90
SS DD	96 tpi Ref 7	46		£1!	5.90
DS DD	48 tpi Ref 7	45		£13	3.79
DS DD	96 tpi Ref 7	47		£17	7.50
Scotch	3M high o	quality	3.5" COT	discs	for
Single:	Sided		and II	£21	1.90
Double	Sided			£30	0.20
CF-2	d compatibl	e 3° di	SCS SI	utable	tor
Double	side			631	i nn

MODEMS

Nightingale	with Con	nmstar	£135.00
Voyager 11			£99.95
WS 2000			£108.69
Modem 10 Offer	000 (BT	approved)	Special
Offer			230.00

HOW TO ORDER

Developed by the state of the s	NAME				
Payment by cheque to: COMPUTACCOUNT (UK) LTD	ADDRESS				
Carriage: Items less than	Quantity	Item	Price	е	
£50: £2.50: £50-£100: £4.50				£	2
Carriage and insurance on	***************************************			£	£
items more than £100: £9.50	Disease and MAT at	124///		£	£
Sand to Computer and (UIC) LLL at	Please add VAT at	15% to Total, including Ca	rriage.		
Send to Computaccount (UK) Ltd., 21	Spring Hill, Birmingham	B18 7BH or telephone 02	1 236 3455	TOTAL	£

moving the cursor onto the note before which you want to insert, and pressing I.

To play the music, press Tab. Press Space to stop. The tempo (speed) can be varied by pressing a number between one and nine (not while the music is playing).

Theme allows you to change the envelope that a voice uses as it plays. All voices are initially assigned envelope number one. To change an envelope move the cursor to the point at which you wish the change to occur (note that an envelope change takes up space so insert a space if necessary) and press f6. The letter A will appear between the bass and treble clefs. This corresponds to envelope one (B is two, C equals three, and so on.) To change to a different envelope, use the up and down cursor keys. A list of envelopes currently available can be found in table 2. If you wish to change any of these envelopes, the data can be found at the end of listing 1. The envelope marker can be deleted with Delete or changed to a normal note or rest with the appropriate function key.

Pressing P will perform a screen dump. Replace the routine in DEF PROCdump if you wish to use your own dump. Finally, the number of notes in each voice (excluding gaps) and the current page are displayed at the top of the screen. There are just over 60 pages, each with eight notes, giving you about 500 notes in each voice.

To save your music or load a previously saved tune press @. On a Master Compact, press Shift-0. You will be presented with a short menu of five options: 1 Save, 2 Load, 3 Final, 4 Exit and 5 Quit.

Option 1 will ask you for a filename and save the music in a form that can be loaded back in, using option 2. This means that the key signature, the accidentals and any gaps you left are preserved, so when reloaded the music will look the same. Note that saved files are all the same length regardless of how many notes you entered.

Option 2 will ask you for a filename and load that file. Once loaded, you will be returned to the editor at the beginning of voice one. Option 3 will ask you for a filename and save the music in the Acorn User Tune and Music Notation (or Autumn). Files saved in this form cannot be loaded back into the editor! This may seem funny, but an Autumn file is totally selfcontained and can be played by a simple!

N%: Current note number P%: Current page number S%: Current stave number T%: Tempo ad%: Address of current note c1%: Start of voice 1 c2%: Start of voice 2 c3%: Start of voice 3 co%: colour of current note ct%: True if Control is pressed du: Duration of current note mem%: Memory usage for each voice nd%: New duration nk%: Number of sharps or flats nn%: Old note number notes%: Number of notes in each voice np%: New pitch pgs%: Number of pages in each voice pi%: Pitch of current note pp%: Old page number sh%: True if Shift pressed ss%: Old stave number key\$: S = sharp, F = flat, N = natural k\$: Key pressed names: Name of file to save/load nkey\$: String of ASCII codes for note rkey\$: String of ASCII codes for rest lengths $\ln 2$: LN2 (= 0.69314) E%(): Current envelope numbers for each voice P%(): Note pitches a%(): Key signature ac%(): Accidentals c%(): Pointers to start of each voice ch\$(): Characters for notes d%(): Flags set when voice has finished

Table 4. Main variables

notes

Basic procedure or a short machine code program (both on the yellow pages). For full details of Autumn, read the article starting on page 81.

m%(): Markers for end of each voice


n%(): Number of notes in each voice

p%(): Pointers for playing each voice


up\$(): Characters for upside-down


Option 4 returns you to the editor and option 5 quits the program. That completes the description of the music editor and should be enough to get you started on your next symphony.

Turn to the yellow page index on page 113 for details of where to find the Theme listings and how to enter them.

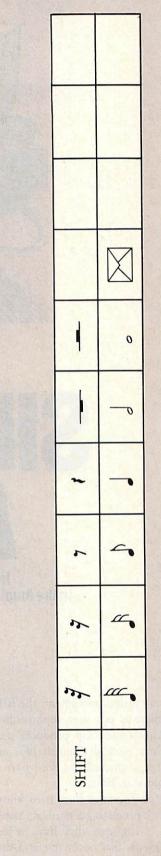





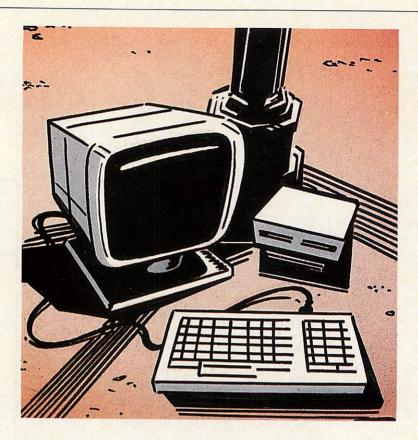

SING-ALONG A MICRO

Here we present a special composition written in the Ample language used with Music 500 and 5000 synthesizers

Bob Cornford-Wood

s a musical instrument, the BBC micro is not very sophisticated. The sound chip produces only three pitched channels plus one 'noise' channel and these have to be programmed in Basic.

As those of you who have tried know, it's hard work producing a musical master-piece with a language like Basic which deals with events that occur one-at-a-time

rather than simultaneously, which is the case with music.

Commercial packages are available to take the programming work out of music production, but all of them have to rely on the crude sound inherent in the BBC computer.

If you still feel inclined to persevere with the sound chip, the Acornsoft book *Creative Sound* is an excellent starting point. It

includes sequencer and synthesizer programs, phase music, and perhaps most impressively, a music compiler. The examples of the music compiler language provided show just what can be done with a lone BBC micro. The Ligetti Continuum may not be everyone's idea of good music, but it is a programming tour de force.

What has all this do so with the Music 500 synthesizer? Well, Creative Sound's

ILLUSTRATION BY MARK THOM

authors, David Ellis and Chris Jordan, are the designers of the Music 500 and its compiled music language, Ample. When applied to a full-blown synthesizer, rather than one sound chip, Ample can make music programming a pleasure.


With the recent introduction of the Music 5000, and its enhanced software – the Studio 5000 'Front End', Music 500s have been available at greatly reduced prices, tempting those previously put off by either the price or by the tales of the unfriendly programming language. This latter objection has been met by the new software, and I think Hybrid Technology, makers of the Music 5000, can now expect to reach micro-owning musicians rather than just programmers.

Underlying the Studio 5000 software, however, is good old Ample, and for those new Music 500/5000 owners who are eager for help and advice, I present here a piece of music, called *Sunrise-Sunset*, which I wrote as a demo for a video soundtrack. The program is written in Ample BCE and is designed to run on a Music 500.

For those readers who are not familiar with Music 500, here is a brief summary of the facilities available to the musician. Sixteen sound generation channels are provided which must be used in multiples of two, giving in effect, an eight-voice polyphonic synthesizer. More complex sounds are available if four or more channels are assigned to a particular voice. (Of course this cuts the total number of independent voices available.) The stereo position of each channel is variable by use of the POS command. Seven placings are possible across the sound stage, from minus three (left) to plus three (right). Music is written as upper or lower case letters - depending on each note's position in the scale relative to the last note.

The pitch range available is over 10 octaves, with the actual frequency range stretching from zero to 20kHz. Pitch can be specified in units of one-sixteenth of a semitone, and fine-tuning is available in units of 0.0056Hz. This is useful for 'modulation effects', that is creating new final sounds by feeding the sound output of one channel into another.

The Ample commands 'Shift' and 'Offset' act on the pitch/frequency to create these modulation effects. 'Frequency' and 'ring' modulation, 'phasing effects' and






Figure 1. Waveform described geometrically (top). Figure 2 (bottom). Waveform described by the strength of a note's harmonics

'synchronisation sound' add to the range of note qualities (or 'timbres') possible.

These qualities in turn depend on the 'waveforms'. Any generated sound has a corresponding waveform and this can be shown graphically, as in figure 1 (above). With Ample, such graphs are considered to be made up of 128 points, and a timbre can be specified by computing these points. An alternative method is to specify 'harmonic' strengths. Each sound consists not of one pitch, but several; a dominant one and weaker 'harmonics' which add to the general quality. Figure 2 shows the same timbre as figure 1, but in terms of the strength of harmonics.

Using either of these methods to describe a timbre, notes are then processed through amplitude and/or pitch envelopes (not unlike Basic's envelopes), giving for instance, a hard, percussive effect, or a gentle pan-pipe effect.

Like any form of programming, personal style plays a large part in the way that the program is constructed. There are many approaches available to Ample program-

mers. The 'threaded' nature of the language with the facility to define 'words' to perform tasks comprising other user-defined words or pre-defined Ample words means that the building blocks exist to manipulate the hardware in almost any way you require. Also, you are able to replace the pre-defined words with your own definitions if you wish.

Sunrise-Sunset illustrates a few of the techniques available to the Ample programmer. Readers familiar with Ample may have other ways of achieving the same results, but those who are less experienced may find some useful hints.

Before describing the program, what about the music I have chosen to illustrate the facilities of the Music 500? Well, it consists of three distinct sections, the central one I shall refer to as 'The Tune'. The first and last sections use repeated phrases of differing bar lengths ('riffs') which, when combined, produce a shifting pattern of sound. Minimalist music fans may note a faint influence of Steve Reich here!

These riffs are in a sort of modal C major, but after a while they collect their thoughts and climb up to F sharp major for The Tune – this key being as far from C major, harmonically, as they can get. To give this tune a rhythmic interest (hopefully!) a few bars of 3/4 time are interspersed with the 4/4 time used throughout the remainder of the piece.

Ample has a 'bar-checking' facility to help you ensure that your note lengths add up, but it is not used here because the 3/4 bars would be rejected! The 'middle eight' bars of the central section gravitate to the key of A major (roughly) before a seemingly imperceptible change in key back to the F sharp of the start of the tune. This is repeated before things start to fall apart. During the disintegration the key falls back to the modal C major, and our riffs return, dying out one by one to leave the bass part humming away on C with a 'coloured' (or frequency modulated) G held above it.

The whole program is controlled by the word 'play'. First, waveforms and envelopes are defined by calling 'setup'. Voices are freed from any previous allocations, the correct number of players are 'hired' you might say, and the initial tempo is set. Each player in turn is given something to play, a 'score', which also tells him

RAM GUIDE

Bruce Smith's RAM User Guide



Sideways RAM is a technique central to the new Acorn Master series of computers. It allows you to load in software from disc or cassette which is designed to behave as if it were part of the machine, and is always on tap to the user.

Acorn User Technical Editor Bruce Smith's book, Advanced Sideways RAM User Guide for the Master and BBC computers will allow you to exploit sideways RAM to the full. The book is backed up with tried and tested software for you to use straight away or adapt to your needs (and for those with less nimble fingers it's available on disc).

Features of the book include: 25 programs and routines demonstrating the use of sideways RAM; compatibility tables and conversion notes for the BBC micro and Electron; writing languages and interpreters; extensive indexing; and there's even a ROM formatter developed by Bruce Smith for use on commercial software, ready for you to type in and use.

Please send me_____copy/copies of the Advanced Sideways RAM User Guide by Bruce Smith at £9.95 (including postage)

Please send me____copy/copies of the book and the Master software* discatthe special price of £14.95 (normal price £17.90)

Please send me ____ copy/copies of the book and the BBC micro software* at the special price of £14.95 (normal price £17.90)

*Discs can be read on 40 and 80 track drives

I enclose my sterling cheque/postal order for £_____payable to Victory Publishing (European readers please add £2 per item for p+p, £5 for airmail)

NAME

ADDRESS


POSTCODE

Send this coupon with your remittance to Acorn User Merchandise Department, 141-143 Drury Lane, London WC2B 5TF.

USERRAM

AUOFFER

Sideways RAM for £30



- New low price only £30
- Easy to fit
- 16k sideways RAM chip with attached connecting lead
- Disc of utility software
- Comprehensive instruction booklet
- Fully compatible with the BBC B and B+ micros
- Simple for schools
- Ideal for Econet

Take a piece of software, load it in *UserRAM* using the utilities provided and it can be accessed instantly using a star command or run as a Basic program. The *Acorn User UserRAM* is as easy to install as a sideways ROM, with just one lead to clip on to the leg of a chip – there's no need to unplug the chip.

A comprehensive printed manual gives fitting instructions, information on how to create your own sideways RAM software and technical notes on how the utilities provided work. Also, a standard disc (which runs on 40 and 80 track drives with any DFS and is unprotected) is supplied with all the basic utilities needed. One year's guarantee is given, with postage and VAT included.

□ Please send me pack at £30.00 each	_ copy/copies	s of th	ne sideways RAN
I enclose a cheque/posta Memory Products Ltd for		le pa	yable to Hybrid
Please debit my Access card	A/c 1	No	Expiry date
NAME ADDRESS			
	POST	CODE	
SIGNED			DATE

the instrument sound to use. They start together on the Ample command 'GO'.

The waveforms are set by giving harmonic strengths (after resetting to zero), which are then converted to a geometric form using the Ample command 'WHG'. Ample does the work of converting a description like figure 2 into one like figure 1. The waveforms are then copied to the wave number specified in 'setup' with the command 'WHC'. Most envelopes are of the 'attack-decay-sustain-release' variety, rather like Basic envelopes, but 'env1' is a pitch envelope, giving a vibrato effect by using 'CYCLE'. The accompanying numbers give the repeating period of the vibrato and its frequency depth.

All sixteen channels are used in the instrument definitions, the bass part and the solo voice for The Tune having four each. '4 CHANS SOUND' turns on all channels. 'ON CHAN' indicates that the following commands relate to all the instrument's channels. Selective commands specify the channel ('1 CHAN') or set of channels ('ODD CHAN'). Wave and envelope allocations use the numbers relating to those in 'setup'. 'AMP' gives the volume, and 'POS' (where specified) the stereo position. Since our players move about, most position commands are embedded in either the 'score' words or the 'music' words.

The riffs ('riffA' to 'riffF') set the initial octave for the part. Middle C is denoted by '0:', minus numbers indicate lower pitches and plus numbers higher ones. The Ample word ',' gives the current note length (in timebase 'ticks'). A usual convention is that '48' gives a crotchet, '24' a quaver and so on. But providing the ratios remain constant, any numbers can be used. '/' gives a tied note and " is a bar line, used here for convenience since bar checking is not enabled, bar lines can be omitted altogether. '-' flattens the following note, '+' sharpens it (not '#' as you might expect), and '=' naturalises it, if set to a sharp or flat by the key signature.

However, 'riffD' is unusual. It forms an ad-lib part using the random generation of some note durations and the pause between repetitions. It is a good example of Ample's use of Reverse Polish Notation, or RPN for short. This is a convention used in programming languages such as Forth. It is beyond the scope of this article to

explain RPN fully, but its use means that numbers and commands are entered in a different, almost reverse, order to similar commands in a Basic program.

The '#' indicates that the following character is a number operator. Thus '-' on its own is a flat sign, but '#-' is a minus sign. RPN uses 'stack operation', so '2+3' would be written as '23 #+', leaving the result on the top of the stack for the next word to use. In 'riffD', 'RAND?' gives our random number (in the range -32768 to 32767). This is divided by 200, leaving the quotient and the remainder on the stack. '#12' swaps these two numbers around so that the quotient comes to the top. '#12' discards this top number, leaving the remainder to be added to 10. Thus a number between 10 and 200 is assigned to the 'duration' value giving a variable pause. A similar process giving a number between 15 and 20 is used to give the note duration for the start of the phrase.

Score

We now come to the words 'score1' to 'score5'. These were the parts given to the musicians in 'play' and so must contain their instrument allocation and any changes required plus the music scores. In 'score1', 'adlibsound' not surprisingly is the instrument that plays 'riffD' described above. Since the exact timings of 'riffD' are now known, the part has been sequenced by trial and error, giving the appropriate values to 'duration' to ensure the correct entry of 'riffE' at the approach to The Tune, and the return to 'riffD' at the end.

The 'FOR()FOR' loop construction is used in these score parts to repeat the riff or section the appropriate number of times. Like most programming languages, Ample generates apparently random numbers by using a very long number sequence. It is possible to specify a starting place when reading numbers from this sequence, and by 'seeding' in this way, we can ensure that the same apparently random numbers come up every time. In 'score1', the random number generator has been seeded with the value 33 to ensure that riffD always plays the same way at each performance, '33 RAND!'.

The other score parts are constructed along more conventional lines. A word defining one 4/4 bar rest has been defined, 'barsrest', and this is used to insert a

measured pause where required. The '@' sign plays in effect a zero length tied note, and its insertion explicitly finishes a musical event before a change in sound and instrument parameters. This happens where 'score2' switches from 'ins2' to 'solovoice'. The Tune components are written in three parts (B, C, and D) associated with each of score 2-5, and these are called as required with a 'FOR' loop dealing with the repeat.

In 'score4', the final notes are played with a modified 'ins4'. Frequency modulation is called for channel one, and a frequency offset specified for channel two.

The most complex score word is 'score5'. Apart from giving the bass line throughout, tempo changes are embedded within the music score. The command 'TEMPO' affects the tempo of all players simultaneously and so all parts keep in sync as the piece slows down or speeds up.

The music parts B, C, and D associated with scores 2 to 5 are unremarkable, apart from having the key of the music explicitly set by the words 'keyC', 'keyA' and 'keyFsharp'. If the piece were to remain in one key throughout, this could be specified in 'play' along with the tempo. But since the piece changes key these words are inserted where appropriate. Ample defaults to the key of C, but a word has been defined for this to change the signature back after F#. Without these key signatures all sharps would have to be written before each note affected. Since six notes out of the eight in the scale of F# are sharpened this would cause a lot of extra work, give more room for error, and use more memory. Linking in with the tempo change function of 'score5', 'part5D' also has embedded 'TEMPO' commands that control the 'disintegration' part of the music as it slides back to C major for the final section.

The scope for improvement on this piece is considerable! Altering the four-channel instrument sounds to just two channels will yield four extra channels for percussion parts. Changing waveforms and envelopes and the modulation controls will conjure up wholly new sounds. Unlike most computer programming, Ample programming is a creative activity in itself, so happy playing and listening!

Turn to the yellow pages index on page 113 for details of where to find the Sunrise-Sunset listing and how to enter it.



31/2 COMPACT versions of CJE software available £2 extra

ENHANCEDI

ALL CJE MICRO'S SOFTWARE IS B, B PLUS, MASTER & MASTER COMPACT COMPATIBLE.

Multi-Font NLQ

Converts most printers to NEAR LETTER QUALITY

in user definable Fonts

For EPSON & EPSON Compatibles, including MX/RX/FX/LX 80/100, STAR DP510/Gemini 10X/SG10/NL10 & Citizen 120D.

Simple to use, standard EPSON codes for Underline and Doublewidth used

After initialising Multi-Font NLQ with a '*MFNLQ' Multi-Font NLQ is normally transparent to the user. Multi-Font does claim some

memory for workspace and storing font data.

Multi-Font NLQ comprises of MFNLQ ROM for the BBC, and utility disc containing the FONT definer, ten fonts, BASIC demonstration program, VIEW demo text file and Driver.

Multi-Font NLG is compatible with nearly all software, including most BASIC programs, VIEW, WORDWISE & InterWORD (SCRIBE & Printer Buffer software currently not supported).

Ten fonts are supplied or create your own using the font definer supplied

NEW

Fonts included are:-Standard NLQ, Courier, Italic, Gothic, CompTS, Bold, Shadow, Outline, Broadway E, Theatre

Additional Font Disc MF 'B' contains:-Hand, Script, Stencil, Broadway, Caps, Italic-Plain, Meccano, Plain, STD large, Wire, Greek/Maths and Inverse.

For Carion & Taxan Kaga users we recommend FONTAID in preference to Multi-Font NLO.

Multi-Font NLQ (ROM and 40/80 Disc) £30.00 Additional font disc 'MF-B' (12 fonts) Additional font disc 'MF-C' (15 fonts) £15.00 £15.00 1.00 P&PonMFNLQ

MASTER Write Protect and ROM select switch. Two switches set to RAM slots to be:-

Internal ROM or RAM Read and Write or RAM Read only. £15.00 inc VAT P&P £1.00

This is Standard

This is COURIER

This is ITALIC

This is bother

This is COMPTS

BOID

THIS IS SHADON

This is OUTLINE

IBIRIDWA YIF

This is THEATRE

EXAMPLE OF MFNLQ FONTS

FONTAID

NLQ Definer for Canon & Taxan Kaga NLQ Printers

Design your own NLQ Fonts or 'download' one of our 40+ predefined fonts.

Fonts can be downloaded within Wordwise, Inter Word or VIEW Documents allowing different fonts to be used for different paragraphs, or even individual lines of text. During downloading your Program or Text will not be corrupted.

On the FONTAID standard font Disk are the following eight fonts:-Square, Outline, Italic, Gothic, Computer Type Style, Bold, Shadow, and Broadway Engraved.

Additional disc 'A' gives an extra 11 fonts including:-Greek/Maths, Plain, Hand & (Elite, Condensed, & Super Condensed).

Now included is a facility to issue ** commands within a VIEW document.
To download new fonts within VIEW documents, the FONTAID ROM needs to be fitted in the BBC. (All other FONTAID facilities are available on both the FONTAID ROM & DISC). Fonts are always downloaded from Disc.

Fontaid is recommended to Canon & Taxan Kaga owners in preference to Multi-Font NLQ. As downloadable NLQ is a built-in facility of the Printer, full access to all the printers control codes is still allowed. The resolution of the FONTAID NLQ is also slightly higher than that of Multi-Font NLQ.

FONTAID requires 6264 RAM chip in printer.

NEW

FONTAID HOIM & STD Font disc (40 or 80 track)
FONTAID ROM & STD Font disc with 6264 RAM (40 or 80 track)
FONTAID Additional Font DISC 'A' (11 fonts) (40 or 80 track)
FONTAID Additional Font DISC 'B' (13 fonts) (40 or 80 track)
FONTAID Additional Font DISC (8) (45 fonts) £30.00 £36.00 £15.00 £15.00 FONTAID Additional Font DISC 'C' (15 fonts) (40 or 80 track) £15.00

FONT ROMS of individual fonts are available eg "Square". P&PonFONTAID

£18.00 £ 1.00

INFORM

A UNIQUE NEW POWERFUL USE FOR SIDEWAYS RAM

INFORM has been developed specifically to take full advantage of the Sideways RAM facility that many BBC micro users now have. Inform is compatible with most SIDEWAYS RAM units including ATPL Sidewise with RAM, Solidisc SWR, BBC B PLUS 128K & BBC MASTER series (not SDL256).

INFORM is a very powerful facility, which allows the user to display text information, of any kind, from Sideways RAM. This information can be readily accessed by using ** commands from the keyboard or from application programs. In this way, much information can be displayed on the screen without stopping the current task, such as entering text in WORDWISE or VIEW.

The information in the RAM can be changed dynamically at any time. Some of the possible applications for INFORM are:-

An on screen help manual can be created for your application, so that a reminder about more obscure points can be displayed at the users request. Information on your program or datafile contents, can remind you of their

Address and/or telephone numbers can be held and displayed quickly even while other applications are running. Very useful if you need to quickly display information about a client while he is hanging on the end of a phone!

Current prices for your products or stock position can be recalled instantly and readily modified using a wordprocessor. Similar files may be created from most databases such as VIEWSTORE.

In fact, any information to which you frequently refer can be displayed immediately without running another program. Your use of INFORM is only limited by your imagination, as they say!

There are three Inform Data Files (I.D.F.), of often used information, supplied on the disk to give an indication of the use of INFORM.

To use INFORM you must have Sideways RAM.

INFORM on 40/80 track disc. P& Pon INFORM £1.00

£20.00

PRINTERS

NOW FREE DELIVERY on PRINTERS (by courier)

Ring for sample printouts, full specification and latest prices.

Near Letter Quality Printers all with Centronics interface, Friction and Tractor feed.

Panasonic KX-P1080 £180.00 Kaga KP810/Canon 1080 £260.00 Canon PW1156A (15") Star NL10 Juki 5510 Juki 5520 (7 colours) Letter Quality Printer Juki 6100 Daisywheel **BBC** Cable

£414.00 £260.00 £320.00 £445.00

£280.00 £ 8.00

Inclusive of VAT & Delivery Ring for latest prices.

CJE BBC Printer PACKS include: CABLE to BBC 1.25M, M/C two tone screen dump. Screen text dump. Function key set up program, Function key label printing program, VIEW driver, Character defining program for downloadable character set (draft mode), 100 sheets of paper, Mains plug with 3AMP Fuse, Booklet giving instruction on pack software and general details of using the printer with a BBC

C.J.E BBC Printer Packs are £15.00 cassette (£16.00 disc) (e.g. Kaga KP810 with Printer pack £260 + £15 = £275 everything included)


TRADE & EXPORT ORDERS WELCOME please inquire for delivery cost.

PRICES INCLUDE VAT

Phone/Credit Card and Offical Orders welcome.

Full range of Printer, BBC, AMSTRAD & ATARI accessories available. Offical ACORN approved Dealer.

C.J.E. MICRO'S (DEPT AU4) 78 Brighton Road Worthing W. Sussex BN11 2EN (0903) 213361



The Superior Collection Volume 3





REPTON



REPTON 2



KARATE COMBAT



DEATHSTAR



MR. WIZ



SMASH AND GRAB



OVERDRIVE

w Concept in Compilations

The Superior Collection Volume 3 features one brand new game, Syncron, together with 7 of Superior Software's classic hits for the Acorn Electron.

Syncron is a fast-action game set against a backdrop of an enormous graphically-detailed scrolling landscape. The landscape is, in total, 1024 times the size of the screen. You must endeavour to complete 16 hair-raising missions; in each mission you have to collect a number of power cylinders, land your spacecraft on a runway with each cylinder in turn, and finally locate and bomb the HQ Building. Whilst skilfully manoeuvring your spacecraft between the defence pylons and force-fields, you are attacked by alien spacecraft and missiles launched from the land bases. A superb game, worth at least £7.95 in its own right.

Acorn Electron dual cassette Acorn Electron 31/2" disc.....£14.95 Here's what the computer press said about some of the other titles on this compilation package:-

REPTON: "This is an astounding game reaching new heights in Electron arcade adventures."... ELECTRON USER

REPTON 2: "Repton 2 is better than anything I've played on the BBC Micro or Electron. Brilliant!" ... ACORN USER

DEATHSTAR: "Deathstar is a super fast, all action arcade classic. It's the sort of game that you can't put down...The graphics are excellent and the scrolling is very smooth in all four directions. The pace is fast and furious even on the starting screen. This action packed game is recommended for all arcade gamers. ... ELECTRON USER

SMASH AND GRAB: "As usual with Superior products the graphics are excellent, with a good use of colour and no flicker. I expect this game will have you rolling with laughter. I certainly did.

95% Instructions 95% Awarded Playability 100% Graphics (Top Rating)" Value For Money 100% ... HOME COMPUTING WEEKLY

Now available on 31/2" disc for the Acorn Electron — due to public demand.



Please make all cheques payable to "Superior Software Ltd".





OUR GUARANTEE

- All mail orders are despatched within 24 hours by first-class post.
- Postage and packing is free.
 Faulty cassettes and discs will be replaced immediately.

24 HOUR TELEPHONE ANSWERING SERVICE FOR ORDERS

А	в	C.	D .	E.	F	G .	
2				Distric		Society	
5 6 PAYMENT		APR	MAY	JUN	JUL	AUG	
9 printin 10 s'tary 11 t'surer	expense j	15.55 8.00 16.50 5.88 12.50	45.55 184.50 0.00 0.00	45.55 0.00 0.00 4.50 12.50	45.55 9.00 10.79 9.00 9.00	45.55 0.80 5.25 0.00 12.50	4
	payment 8	30.43	230.05	62.55	56.34	63.30	4
18 sale of19 sale of	donatio	0.00 12.50 0.00 35.00	0.09 37.59 650.00 320.00	0.00 25.00 0.00 200.00	68.00 12.50 0.00 57.00	84.50 0.00 0.00 88.00	5 1 27
23 total	receipt 14	7.50	1007.59	225.00	137.58	172.50	34
	total 6	7.07	777.45	162.45	81.16	109.20	29

DOINGIT ON THE SIDE

Printing out letters and programs presents no problems, but what of the wide spread sheet?

John Knight

ave you ever wished your printer was wider? One of those able to take 'professional' 14-inch wide paper? How about if your printer was as wide as you wanted and you could print the widest spreadsheet ever seen, or a program listing with multistatement lines where each line really was one line, not several? Or you need to print text data (as opposed to graphics) that is

too wide for any printer? If that has ever been your problem read on.

Normal printing is ideal for text that is long and narrow, such as program listings, letters and lists, but there are occasions, particularly with spread sheets, when your output is wide but not very long.

The following program will be ideal for those situations, it will also handle long documents but of course if your output

won't fit on one piece of paper then you will have to 'cut and paste' no matter how it is printed – at least this program gives you a choice of how you go about reaching the best compromise.

This is a stand-alone program developed (initially for the *ViewSheet* user) to allow text files to be printed sideways down the page. However, to coin a phrase, its use is limited only by your imagination! As long

SEP OCT NOV DEC JAN FEB MAR TOTALS 5.55 45.55 45.55 45.55 45.55 45.55 45.55 546.60 8.98 8.98 99.90 8.98 8.99 9.90 8.99 9.90 9	н.	I.	J.	K	L.	M	N.	0.
5.55 45.55 45.55 45.55 45.55 45.55 45.55 546.69 8.98 9.88 99.80 8.89 <td></td> <td>Account</td> <td>for:</td> <td>1985-8</td> <td></td> <td></td> <td></td> <td></td>		Account	for:	1985-8				
8.98 9.89 99.80 6.89 8.09 0.09 0.09 283.59 8.99 6.89 6.80 77.50 75.00 77.50 77.	SEP	ост	NOU	DEC	JAN	FEB	MAR	TOTALS
6.00 40.50 26.00 58.00 9.00 17.50 22.50 373.00 1.25 64.00 80.00 125.00 16.00 0.00 37.50 421.25 0.00 0.00 0.00 0.00 0.00 0.00 5.00 300.00 48.00 25.00 35.00 108.00 321.00 1912.00 2.25 404.50 154.00 208.00 51.00 125.50 381.00 3356.25	0.00 0.00	9.00 6.00 6.00	99.80 8.30 8.00	6.80 6.80	0.00 0.00 22.06	0.00 0.00 3.60	0.00 0.00 0.00	283.50 47.64 35.98
1.25 64.00 80.00 125.00 16.00 0.00 37.50 421.25 0.00 0.00 0.00 0.00 0.00 0.00 0.00 650.00 5.00 300.00 48.00 25.00 35.00 108.00 321.00 1912.00 2.25 404.50 154.00 208.00 51.00 125.50 381.00 3356.25	5.55	58.65	152.85	64.85	67.55	64.15	45.55	991.22
2.20 101.00 201.00	1.25	64.00	80.00	125.09	16.00	0.00	37.50 0.00	421.25 650.00
6.70 346.45 1.15 143.15 -16.55 61.35 335.45 2365.03	2.25	404.50	154.00	208.00	51.00	125.50	381.00	3356.25
	6.79	346.45	1.15	143.15	-16.55	61.35	335.45	2365.03

as your data to be printed can be stored in a file instead of printing and you are the proud owner of one of the many Epsoncompatible printers then the rest is easy.

Getting the output into a file can be done in several ways, the obvious one is *SPOOL. The View family permits this but other wordprocessing programs such as Wordwise have a menu option to produce spooled output. The *SPOOL option however, leaves unwanted extras and so if you are using one of the View family the best option is to use Graham Bell's excellent spooler program, V.ASCII (Acorn User July 1986 pages 173 to 177). This pretends to be a printer driver but rather than interpret any highlight codes it strips them out and sends the text to a file that is ideal for this program. The capabilities of the program are:

Maximum input file size 20480 bytes Maximum line length up to 20480

Page 'length' 96 lines (eight inch paper) Printer any compatible with Epson dot graphics. Specifically ESC 'L' for 120 dots per inch, and ESC 'A' linefeed.

All non-printable characters, that is, all values below space in the ASCII sequence,

are treated as carriage-return and consecutive non-printable characters are treated as one carriage-return.

Typing the program in should not present any more than the usual heartache. The major cause of problems are likely to be the use of the indirection operators '?' (in FNgetletter and FNgetbyte) and '!' (in PROCgetfile) plus the small chunk of assembler in PROCmccode. None of these is unduly complicated but they are important and crucial to the working of the program. Remember, Knight's First Law of Programming states: 'the consequences of inaccurate typing are inversely proportional to the size of the missing character – send for the disc!'

If you do type it in be sure to save it before you run it, and go easy on spaces and REMs as it's quite a tight fit.

Here are the steps you should follow to print sideways using ViewSheet:

- 1 *SHEET
- 2 LOAD or enter the data manually
- 3 Set print window to cover whole sheet
- 4 PRINTER V.ASCII
- 5 PRINT
- 6 Enter filename at prompt

7 *BASIC

8 CHAIN "SIDEWAY"

9 Enter filename

If you don't have V.ASCII then use these steps instead:

- 4 *SPOOL filename
- 5 SCREEN
- 6 *SPOOL

If you have a printer that can handle paper wider than eight inches then you can alter 'maxdots' in PROCsetlimits to be 120 times the width of your paper in inches, giving you more lines across the page; the value of 'maxwidth'. So any mention of 96 lines really means maxwidth.

When the program is run it will request the name of the file to print. The user can either enter the name of the file if known, or an operating system command such as *CAT, to locate the file or do other housekeeping. The operating system command is detected by the presence of the star as the first character typed. This useful facility needs careful use however, as some star commands overwrite the Basic program.

When a filename is entered the program determines whether or not the file is there

Thinking of PLAYING THE STOCKMARKET... then you should consider one of the INVESTMENT ANALYSTS from Synergy Software

SHAREMASTER

ShareMaster is the ultimate investment analyst and reporting system for the BBC Micro.

Designed for the small or professional investor, ShareMaster the most powerful tool available for predicting the mood and direction of the stockmarket and analysing investment performance. ShareMaster can analyse share prices, currencies, traded options, commodities or any other time based series by a variety of graphical statistical and analytical measures to help you improve the timing and success of investment decisions.

charting facilities include logarithmic-linear scaling, point & figure, linear regression, exponential curve smoothing, correlation, relative strength, comparisons momentum, Rate of Change oscillators, moving averages, highs, lows trendlines etc.

Profit Analysis facilities include Valuation, Performance Reporting, Single Share and Portfolio profit analysis, etc.

Numerical analysis facilities include a variety of indicators and statistics for any selected price range.

ShareMaster has extensive database and file management features including Company Profile, Transaction Reporting, File Import & full editing facilities.

These are only a fraction of the facilities offered by ShareMaster. Ask for our FREE comprehensive brochure.

ShareMaster is exceptionally easy to use and is supplied with a 96 page operating manual which includes sections on interpreting the indicators provided and their use in investment strategy.

We believe that no investment package can match ShareMaster in terms of facilities, performance, flexibility, ease of use and price. We firmly believe that ShareMaster will be the best investment you will ever make.

* Also available. . . SHARE ANALYSER

'excellent... very highly recommended' - Whidh? Software Guide 'an excellent program' - Micro User

A budget reporting, analysis and charting package designed for the small investor. Transaction and Share Price Databases are established for each share name and a variety of report and analysis facilities can be instantly accessed. Reports can be produced on any printer. Share Analyser is easy to use and is supplied with a 20 page operating rnanual. Ask for our FREE brochure.

ORDER FORM: Please state 40 or 80 track-Dealer enquiries welcome. Prices include VAT and first class post. Overseas orders send price in. VAT for airmail despatch.

Cheque, Access, Visa and official educational orders accepted.

ShareMaster BBC B, B+ & Master computers £99.95 Share Analyser BBC B, B+ & Master computers £24.95

Send cheque, P.O etc to Synergy Software, 7 Hillside Road, Harpenden, Herts AL5 4BS (Tel. 05827-2977).

it-Price Disks—

from only £14.99 for 25 disks delivered to your door

Offer 1 - 5.25" 'Universal' HIgrade disks to suit all drives SSSD, SSDD, SSDD, SSDD, SSDD & DSQD 48 or 96tpi (40/80)

Disks are packed in 25's, complete with envelopes, label sets and write protect tabs. Nothing wasted on fancy brand names, just plain good value you can rely

£ 14.99 - 25 disks £ 26.99 - 50 disks * Full spec Higrade disks, made to 60% clipping level £ 49.99 - 100 disks * Life-time no quibble warranty £ 96.99 - 200 disks * Hub-rings on 5.25" disks £119.99 - 250 disks * Label sets & envelopes included £219.99 - 500 disks * No extras - VAT & delivery included.

Same day despatch - at no extra cost

3M_The BRAND leaders

at CASH IN CARRY prices

at CASH IN CARRY pric SSDD-48tpi 744 20 disks C24.99 Remember VAT & Delivery DSDD-48tpi 745 20 disks C35.99 Remember VAT & Delivery DSDD-96tpi 747 20 disks C35.99

very welcome.

Coloured 'Universal' disks at lowest prices!

Higrade Rainbow Coloured disks Offer 5

Use coloured disks to code your files. £ 18.99 – 25 disks
Buy our rainbow pack of 5 different
E 35.99 – 50 disks
C 69.99 – 100 disks
E 129.99 – 200 disks
In quality and price.
E 149.99 – 250 disks
E 279.99 – 500 disks



Send your cheque etc. to Direct Disk Supplies Ltd. at the new address below.

Official Orders. Bona-fide orders from Universities, Colleges, Schools, Charities, etc. are very welcome



ALL PRICES INCLUDE VAT & DELIVERY TO YOUR DOOR! -

Offer 4 Save money by using both sides **Reversible Media Life**

floppy disks complete with 2 notches and two index holes. Again, packed in complete sets of 25 disks

£ 18.99 - 25 disks £ 35.99 - 50 disks £ 69.99 - 100 disks £129.99 - 200 disks £149.99 - 250 disks £279.99 - 500 disks

DIAL-A-DISK DIAL-A-DISK on 01-979 7811, and give your ACCESS or VISA number and

01-979 7811 Answering serv for out of hou orders



How to Order

expiry date.

Direct Disk Supplies Ltd.



Dept AU FREEPOST, 129 High Street, Hampton Hill, Middlesex TW12 1BR

	. я в .	с.	D .	E.	F.	G.
2			Sheem &			Society
3 5 PAYME	NT TO THE RESERVE TO	APR	MAA	зин	JUL	คบด
7 8 lo 9 printa 10 s'ta	in ry expense	45.55 9.86 16.58 5.88 12.50	45.55 184.58 9.88 9.88 8.88	45.55 9.88 9.88 4.58 12.58	45.55 8.66 10.79 8.66 9.86	45.55 8.68 5.25 8.88 12.58
13 14 tot 15 16 RECET	al payment	80.43	238.85	62.55	56.34	63.38
18 sale 19 sale 20 Wynne 21 membe	of T shirt of books 's donatio	9.99 12.58 9.66 135.69	0.00 37.50 650.00 320.00	9.88 25.88 8.88 288.88	68.88 12.58 8.86 57.88	84.50 9.99 9.60 88.00
22	al receipt	147.58	1887.59	225.00	137.58	172.58
24	et total	67.87	777.45	162.45	81.15	189.28

A section of the double-height database illustrated on the previous pages printed normal height

and if so what size it is. The whole file is then loaded into memory, and printed from there. This does, of course, introduce a limit on the size of file that may be printed but removes the need for repeatedly accessing the file. The program next asks if you want the output in double-height characters, these are much easier on the eye (compare the diagrams above and on the previous page), but reduce the page length by a half.

Printing then proceeds using successive letters from each line, the first of each line, then the second from each line, and so on. If more than 96 lines are present then lines 97 onwards are printed to the 'right', ie, further down the paper. The printing is done in much the same way as a graphics screen dump would be done, using not the printer's character set but the characters belonging to the BBC micro.

One interesting benefit which accrues from this is that the pound sign, other ASCII oddities and any user defined characters, appear exactly as they should and not as some bizarre shape dreamt up by the printer manufacturer.

When the file is complete the program asks if there are any more to be printed and if there are returns to the point where you tell it what the filename is.

The program

Those of you keen to get on with the program can now proceed to the yellow pages index, as I shall describe exactly how the program works.

After the file has been selected and loaded as described above, the program deals with it in chunks of 96 lines. The reason for this is the choice of the '960 dots



Program asks for filename

per line' mode and the use of 10 dots per character, including two dots for vertical space between the letters. What actually happens is that by scanning the text in memory, a table of pointers is set up, each one indicating the place in memory where the next line begins. If more text remains after this then the variable 'morelines' is set to 'TRUE' and the rest of the lines are scanned later.

The bit that turns the letters sideways is in PROCreadfile. This procedure goes through the table of line pointers requesting the next letter for the current line. If this line has been finished, ie, the next character in the line has a value less than 32, the function invoked (FNgetletter) returns a value of 32 (the ASCII code for space). If the line has not been finished the appropriate ASCII code is returned, the pointer is changed to point to the next letter, and the count of lines still active is incremented. This is repeated until the count of active lines reaches zero.

All the codes returned from FNgetletter are passed into the machine code routine (CALL vducode on line 860) via the A%

variable, one of the four resident variables that provide access to the registers in the 6502 processing chip.

This routine calls OSWORD 10, the operating system subroutine that returns the dot pattern of any character in an array of eight bytes. These eight bytes are then sent to the printer which is then followed by two zero bytes to give a space between the lines. Driving the printer in graphics mode like this means that data is sent to the printer in a fixed format. What happens is that the Escape 'L' command in line 830 tells the printer to expect (n2 * 256) + n1 numbers (in our case 960) and to use those numbers to control which pins of the print-head to fire. So if a carriage return was sent amongst the 960 numbers it would only result in the pattern for the number 13. The carriage return and line feed codes still need to be sent however, and this is done at the end of each group of 960 bytes.

Currently the program expects the printer to do automatic line feeds with each carriage return sent. If this is not the case for your set-up then change the two VDU 1,13 commands in DEF PROCreadfile to VDU 1,13,1,10.

Finally, error handling is deliberately simple – whenever I type in someone else's program I usually want to change the way errors or the Escape key are handled, so I have only included a simple 'ON ERROR' command for this.

Turn to the yellow pages index on page 113 for details of where to find John Knight's sideways printing program.

You could also save yourself time by buying the monthly listings cassette or disc. See page 136.

Cassette only Fixed Odds Forecaster Case

GUARANTEED WINS!

*Displays in seconds:*Forecasts*StarBets*Bankers*
Form Finder II has been produced wiith the fixed odds
clients very much in mind. And because'Bankers'(best
homes) selected by the program have an 80% minimum
guarantee, we can confidently predict a suitable perm,eg.8
from 10 Bankers, on your long list, will bring you wins
within 13 weeks, including any stakes lost in that period.
Your program gives you the various choices of bets that you
can make that are covered by your guarantee.
Form-Finder II's unique formulas consistently produce

Form-Finder II's unique formulas consistently produce results even on the extremely difficult sections list. Whether your bet preferences are for pools, individual bets, fixed odds or any other football forecasts,) Form Finder II is the one complete package that is a 'must' if you want to take more than chances!

*Displays in seconds: *Pools values *match or coupon numbers*

Added New Feature Bet Runnings Calculator

For your copy of Form Finder II complete the priority order form below and send to ALLAN DATA 1 Lorn Road, Dunbeg, Connel, Argyll. PA37 1QG.

PRIORITY ORDER

EU2

Please rush me within seven days, my copy of Form Finder II for my Electron /BBC. I enclose cheque/P.O. no. for £9.00 made payable to ALLAN DATA, which I understand will be refunded to me in full should the program not perform as stated above within 13 weeks

Please print clearly. NAME

ADDRESS

Everyone needs help! Here it is. HELPSCREEN EPROMS

Our range of Eproms will give your BBC that INSTANTANEOUS HELP facility. Each EPROM contains 15 screens of Help each called by a single keypress.

No need to remember lists of commands. No memory tied up. No interference with other programs.

FOUR UNIQUE SERVICES:-

1) STOCK EPROMS

Ready to fit chips containing a mass of Help, all instantly to hand. Do away with dog-eared reference manuals! Speed up your programming! No.1 BEGINNERS BASIC

All Basic commands and their syntax, specially grouped to aid learning. No.2 PROGRAMMERS BASIC

Packed with the reference information you constantly need when

No.3 PROGRAMMERS MACHINE CODE

Operating System calls & vectors and a host of other invaluable

All one Price £19.95 including P&P.

2) CUSTOM EPROMS.

We have a very comprehensive range of Helpscreens in our catalogue. You select from these the ones you want, and we will arrange them in your order and supply the Custom Eprom. Send for free catalogue and ordering information.

Price £24.95 including P&P.

3) SUPER CUSTOM EPROMS.

You supply your own Screens (or programs to create them) on disc or tape. Supply all 15 or maybe mix in some of our catalogue Screens, and we will arrange them all in Eprom with the necessary code for instant, single key access to each. Send for free catalogue and ordering information.

Price £27.95 including P&P.

4) DISC ALTERNATIVE.

Any of the above options on disc, with (almost) instant access and using the same single key access. (Uses 1K RAM). Price £10.95 including P&P.

All goods come with full instructions on fitting and use.

MIGRO HELP

P.O. Box 17, NEWTOWN, POWYS. SY16 1ZZ.

SUBSCRIPTIONS

ACORN USER OFFER

Subscribe now! – and get a Games Compendium cassette free

If you've enjoyed reading this issue of Acorn User, the biggest and best-selling BBC micro/Acorn magazine, why not ensure you receive your monthly copy regularly by subscription and take advantage of our super new special offer. When you subscribe

at the annual price of £17.50, we'll send you our new games cassette worth £3.95 absolutely free (UK only).

The Acorn User Games Compendium features some great games for BBC micro, Master and Electron owners – such as Spectramania, Quadline,

Picture Slide and Shuggy's Garden.

Stay in touch each month with Acorn User - the biggest and the best!

Overseas subscribers can take advantage of our two-year rate offer, 27 issues for the price of 24. Order form on page 135.

YES! Please start my Acorn User magazine subscription from the	issue and send me my FREE Games Compendium cassette.		
NAME ADDRES			
POSTCODE			
☐ I enclose my cheque/postal order for £17.50 made payable to Redwood Publishing	☐ Please debit £17.50 from my Access/Barclaycard/American Express		
Account No: Expiry Date			
SIGNED	DATE		
Send this coupon with your remittance in an envelope to Christine Allen, Subscriptions Manager, Redwood Publishing, Lambourn Woodlands, Newbury, Berkshire RG16 7TW.			



B.U.5. Station Road, Clowne, Chesterfield, S43 4AB. (0246) 811585 (4 lines)

WE OFFER A DESIGN DEVELOPMENT AND MANUFACTURING SERVICE



SIDEWISE

SIDEWISE, ROM/RAM EXPANSION FOR THE BBC MICRO

- Full Sideways ROM Expansion to a total of 16 ROMS.
- ★ 16K Battery backed CMOS RAM Option - Ram is treated as ROM no 15 on read.
- Software for Sideways ROMS may be down loaded and run in RAM under true Sideways environment. See below for details of software packages available.
- An ideal tool for Sideways ROM program development with the addition of RAM
- Plug-in-and go construction mounts neatly inside the BBC.
- * No soldering required to fit Sidewise.

* Full buffering of address and data busses - prevents data bus loading problems assocaited with unbuffered boards.

Join the 10's of thousands of happy users.

£38.00 + £1.00 P&P + VAT

OPTIONS FOR SIDEWISE Battery back up kit

£17.00 + 50p P&P + VAT CMOS RAM 8K Bytes

£5.00 + 50p P&P + VAT

Buy 2 for £8.00 + 50p P&P + VAT



SIDEWISE PLUS

The Sideways ROM Board for the new BBC B+ Computer

- ★ Full Sideways expansion to a total of 10 x 16K ROMS.
- ★ Mounts neatly over the Sideways area inside BBC + Micro.
- No soldering required to fit Sidewise Plus.
- * Fully buffered board.

£32.95 + £1.00 P&P + VAT



SOFTWARE PACKAGES

A range of software specifically designed to enhance and extend the use of Sideways RAM on ATPL Sidewise and other products.

* SPOOLIT Allows the Sideways RAM to be used as an 8K or 16K printer buffer.

£10.00 + 50p P&P + VAT

★ DFS SHIFT Moves the user RAM workspace required by the DFS into Sideways RAM. Allows memory recovery to & 0E00. Works with Acorn 0.9 DFS only.

£10.00 + 50p P&P + VAT

★ SIDESWIPE Allows you to save Sideways ROM onto disc and load Sideways ROMS from disc into RAM.

£10.00 + 50p P&P + VAT

★ TURBOPROM - 1-2 Uses a fast programming algorithm to greatly reduce

programming time of EPROMS (14 mins = 2 mins). Used with Autoprom available on disc or Sideways ROM.

£15.00 + 50p P&P + VAT



CUSTOM RAM/ROM WRITER
Utility to produce a ROM image for
AUTOPROM or SIDEWISE RAM to

automatically download and run a BASIC programme, and/or your utilities on power up. Several utilities supplied with this package, please specify 40T, 80T, disk or cassette.

£14.95 + 50p P&P + VAT

Please state 40 or 80 track disc.

ĄΤ

INSIDEOUT

INSIDEOUT is designed to make a sideways ROM socket available outside the BBC computer, to allow for easy exchange of Sideways ROM's.


- Can be used from BBC model B or expansion board sockets.
- Supplied with low insertion force socket for ease of use-no costly cartridge packing
- * EPROM plug in and go.
- ★ Not limited to one device.
- Socket rated at 100's of insertions mounted outside the BBC. Easily removed and refitted.
- ★ Can be mounted in user defined location
 not fitting in an illegal position.

ONLY £13.00 + 50p P&P + VAT

AT

MOUSE PAC

Advanced software for the BBC Computer, available in the following combinations.



COMPATIBLE WITH AMX MOUSE

- Comprehensive manual.
- Drawing facilities include: Multi point rubber banding, 4 colour shapes for circles, squares, rectangles, elipses, arcs and sectors at any angle and size.
- Drag drawing and air brush facilities with unique area masking.
- ★ Colour fill in any of 4 solid colours and a choice of 120 textured colours.
- Screen printer dumps to Epson printer.
- Utilities to use mouse or light pen in your own programs.
- Colour stick fits analogue port, mouse fits to user port and needs 40 or 80 track disc drive.
- Text can be entered in various sizes, fonts and colours.
- Save and load screens to and from disc.



BREAK LOCK

EVER HIT YOUR 'BREAK' KEY WHEN YOU DIDN'T MEAN TO?

FOR THE BBC MICRO

Fit ATPL 'BREAK LOCK' to your BBC Micro and avoid disaster where inadvertant use of 'BREAK' will cause loss of data and/or programmes.

ATPL 'BREAK LOCK' is a 2 position keyswitch that will:

★ Prevent accidental or unauthorised

use of the 'BREAK' key.

- Act as a security device to prevent unauthorised use of your system more effectively and cheaper than security ROMs.
- * Easily and neatly fit in the 'Ash-tray'.
- ★ Render demonstration machines tamper-proof.

£8.53 + 50p P&P + VAT



CAD SYSTEMS



Distributor

Professional CAD packages for IBM, Sperry, BBC and Apple computers

- ★ Over 10,000 users worldwide comprising: Electrical, electronic, mechanical, chemical, planning engineers, architects and educational establishments.
- ★ Complete systems supplied comprising: Computers, monitors, plotters and software.

Please contact Dale Atkins for further details.

DEALERS ENQUIRIES WELCOME ON ALL OUR PRODUCTS -PLEASE CALL



For technical queries on ATPL products phone (0246) 811585 between 3-5 p.m. Mon to Fri.

ΑŢ

AUTOPROM

Professional EPROM Programmer for the BBC computer and Acom type Systems.

- Capable of programming all 27 series EPROMS up to 27256 and most 25 series EPROMS.
- ★ Tape or disc based software, including fast program algorithm (27128 in 2
- mins) and comprehensive manual.
- ★ Unique facility to run users own basic or machine code programs at Switch on or Paget

£98.00 + £2.00 P&P+ VAT

CONDITIONS OF SALE & DELIVERY

Cheques made payable to Advanced Technology Products Ltd. Please allow 28 days for delivery. Cost of carriage or postage refer to each section. Quantity orders and overseas carriage charged at cost. Condition of sales available on request.



ACCESS/VISA accepted. Carriage to be added to advertised price, then add VAT to the total. In accordance with our policy of progressive development, we reserve the right to modify specifications without prior notice.

PART EXCHANGE YOUR BBC



AMSTRAD PC1512SD£458.85 PC1512DD£573.85 BBC MASTER 128....£449.00 TURBO UPGRADE.....£125.00 WRITE PROTECT SWITCH CUMANA DISK SYSTEMS CSX100L£79.95 CSX400S.....£125.35 CS100.....£102.35 CS400.....£159.85 CD200£188.60 CD800S£251.85 PRINTERS KAGA KP810 £263.35 CANON PW1080A £286.35 PJ1080A £458.85 EPSON LX80£217.35 JUKI 6100.....£251.85 6200.....£516.35 MONITORS MICROVITEC 1431 £193.20 1451£251.85 1431AO£251.85 1451AP.....£286.35 KAGA/TAXAN 12"....£113.85 PHILIPS 12"£90.85

FOR ANYTHING WE CARRY IN STOCK ALLOWANCE ON YOUR OLD MACHINE

We will accept your BBC computer, any age, any condition, even nonworking, in part exchange for any product we normally hold in stock. This offer applies to both BBC products and Amstrad computers.

A selection from our product range is shown here, and as you can see, our prices are very competitive. The allowance you can expect for your machine is detailed in the table opposite.

Just send your BBC (and manual please) to us with a cheque or credit card number, and provided we have the item you require in stock (please phone to check), it will be sent by return.

This offer means that Compshop has a number of second hand BBC 32K machines for sale, all with 3 months warranty. So if you want a BBC but can't afford a new one, phone us for prices and availability.

CARRIAGE ON ANY ITEM POST — £3.00 COURIER — £10.00 ALL PRICES INCLUDE VAT

	MORE THAN TWO YEARS OLD	TWO OR LESS YEARS OLD
WITHOUT ACORN DISK INTERFACE	£125	£175
WITH ACORN DISK INTERFACE	£175	£225

PLEASE DEDUCT £30.00 IF YOUR BBC HAS ANY REPAIRABLE FAULTS

COMPSHOP PRICE PROMISE vve guarantee to match the price on equipment offered from stock through any other supplier.

COMPSHOP was established in 1978 and has continually offered the best in micro computers to discerning customers.

Quotations given

One year warranty on all products



We sell only computers and peripherals, and therefore can offer the support many other shops cannot.










14 Station Road, New Barnet, Hertfordshire, EN5 10W (Close to New Barnet BR Station - Moorgate Line)
Telephone: 01-441 2922 (Sales) 01-449 6596 Telex: 298755 TELCOM G
OPEN (BARNET) - 10am - 7pm - Monday to Saturday

NEW BRANCH OPEN AT 311 London Rd., Camberley, Surrey GU15 3HE Telephone (0276) 22677

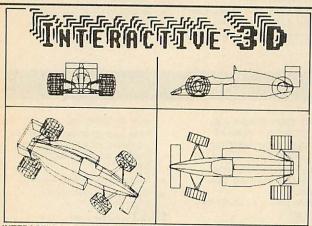

INTERACTIVE 3D is a unique program that actually allows you to create a design directly in a 3D view. And you can zoom, rotate and change view at any time to visualise the effect of design changes. Full editing facilities allow you to create and delete points and lines, and adjust their positions in any direction, all under cursor control without having to enter any numerical data. Circles can be generated automatically and symmetrical forms can be created by reflections. Designs can be saved to tape/disc and reloaded. Views shown on the screen can be saved or printed. Altogether, nearly 50 operations are included.

For BBC B, B + and MASTER series.

- Acclaimed in reviews (Micro User, Beebug, A&B etc)
- * Widely used in schools, colleges and industry
- Licenced to Education Authorities
- * Sold in nearly 20 different countries worldwide
- * Probably the most powerful 3D CAD system for any home micro, and at an unbelievably low price

£8.95 cassette £12.95 disc (state 40 or 80 track)



Cheque/PO to: DESIGN DYNAMICS[A] 8 Meadow Way, Ampthill, Bedford MK45 2QX

RESOLUTION **BREAKTHROUGH!**

The BBC computers have quite high resolution graphics. The maximum horizontal resolution of 640 is good but the overall effect is spoilt by the mediocre vertical resolution of 256, even in MODE O. The same limitation applies to normal screen dumps, so the only way to obtain smooth curves has been an expensive plotter.

expensive plotter.

Nothing can be done about the screen resolution, but now our unique software, MODE-ØØ DUMP, provides a means of outputting graphics to a dot-matrix printer at an amazing 640 x 512 resolution. All you have to do is add two simple 'SPOOL statements to your BASIC or machine code program. All the VDU data used to plot the picture are then saved to disc for use later by MODE-ØØ DUMP. Your program can run in any MODE-ØØ DUMP. The dump is in one colour (i.e. as MODE O) and covers most of an A4 page.

A useful graph plotting program is included as an example to show you how to add the 'SPOOL statements to your own programs.

MODE-ØØ DUMP for BBC B, B+ and Master computers on 5½" disc.

£12.95 disc only (state 40 or 80 track)

Please note: MODE-ØØ DUMP works with most dot-matrix printers, but if ESC"*" is not available (check your printer manual) then you have to omit from the dump 6% of the screen height (either top or bottom).

SPECIAL OFFER: (40 or 80 track disc only) INTERACTIVE 3D + MODE-ØØ DUMP £20.00

You can save INTERACTIVE 3D pictures to use with MODE-ØØ DUMP



Your task is to save the village of Austburg from imminent devastation. You must enter Ravenskull Castle and retrieve the silver crucifix which the evil Baron Strieg has stolen. Only then will Austburg be safe from the Zombies who inhabit the swamp surrounding the medieval castle.

Ravenskull is a massive arcade-adventure featuring smooth 4-way screen scrolling over the 4 levels of play. Each level is 64 times the size of the screen, and there is an initially-bewildering variety of game characters including: acid pools, man-eating plants, time-doors, keys, pick-axes, scythes, spades, bows and arrows, dynamite, bells, food and wine (beware! it may be poisonous or have strange side-effects). There are also several magical scrolls and potions to be found. These may be good or evil; for example the strength scroll gives you the power to push wooden casks, whereas the lightning-strike scroll is fatal if used.

The guardians of the castle, the vicious Ravenbees have to be avoided or, in some cases, destroyed — but there is only one way to kill them; you must discover how as you venture through the dank passages of the castle. Your quest is not an easy one — only with time, experience and a little luck will you unravel all the mysteries within Ravenskull Castle.

PRIZE COMPETITION

lf you are skilful enough to complete Ravenskull, you can enter our prize competition. The prizes include a £100 first-prize, with Superior Software T-shirts for runners-up.

BBC Micro disc (51/4").....£11.95 Electron cassette.....£9.95 BBC Micro cassette......£9.95

Ravenskull is compatible with the BBC B, B+, Master





The screen pictures above show the BBC Micro version of Ravenskull

24 HOUR TELEPHONE ANSWERING SERVICE FOR ORDERS



OUR GUARANTEE

- All mail orders are despatched within 24 hours by first-class post.
 Postage and packing is free.
 Faulty cassettes and discs will be replaced immediately.

PRESENTING POINTER PICTURES

The Compact has a pointer ROM as standard software, which can be used to draw sprites

David Atherton

n your Master Compact desktop manual, you have already seen the moving pointer, and also the moveable pictures such as the calculator. In this article, I will be telling you how to use the pointer and moving picture objects (known as sprites) in your own programs. You will not need to know anything other than a little Basic to write these programs, and I have given you an example in the yellow pages.

A standard set of sprite pictures is supplied with the machine.

To use the pointer and sprite systems you will first need to load some files into memory. Prepare a disc as described in the box below and start it up with Shift-Break. All the relevant files will load in. You are now ready to try any of the techniques or run any of the example programs mentioned in this article.

Making a sprite work disc

- 1 Run the Welcome disc to the point where the pull-down menus are displayed 2 Press CTRL-Break
- 3 Insert a formatted disc, and type *MOUNT
- 4 Type: *SRSAVE SPRITER 8000+2400 W Q
- *SRSAVE PMFS 8000+2000 X Q
 *SPRITE

SSAVE WIMPSPR

5 Type *BUILD !BOOT, and then: 0001 *SRLOAD SPRITER 8000 WQI 0002 *SRLOAD PMFS 8000 XQI 0003 *SPRITE*

OCCUPATION TO

0004 *SLOAD WIMPSPR

1 0000

then press Escape

6 A disc suitable to run the programs described in this article is now prepared. Press Shift-Break to initialise it



Programming the pointer

You have seen on the Welcome desktop that the pointer can be moved around the screen with cursor keys, joystick or mouse. It can also be moved with an analogue joystick on a Master 128 or a trackerball. Separate commands exist to select each of these devices. Actually, the mouse (anything AMX compatible) and trackerball (anything Marconi RB2 compatible) commands are identical. These devices are both connected to the joystick port on a Compact, and the user port on a Master 128, and although their wiring is slightly different, the software can work out which device is connected. Don't assume from this that a Compact trackerball is available yet. I've not seen one, although like mice, it is only a question of rewiring the plugs.

To select a device, the relevant pointer system star command is given (see box above) either without a parameter, or with 1 as the parameter. So to select the cursor keys the command would be *KEYS or *KEYS 1. To change to joystick, two commands would be needed: *KEYS 0 to

Pointer system star commands

KEYS 0/1 Select (1) or deselect (0) cursor keys as pointer drivers

DIGITAL 0/1 Select or deselect joystick as pointer driver

JOYSTICK 0/1 Select or deselect analogue joystick as pointer driver. This is only relevant where the pointer system is used on a Master 128

MOUSE 0/1 Select or deselect mouse as pointer driver

POINTER 0/1/2 0 = Remove pointer

1 = Show pointer

2 = Update pointer, but don't show it TRACKERBALL 0/1 Identical to *MOUSE. Software detects which device is present

TSET (X) (Y) Move pointer directly to X,

SETPAL Implement stored colours on screen palette

FX 163,243,n n=0...7 Sets background colour in store:

n=8...15 Sets foreground colour in store n=64 Step background colour on one n=72 Step foreground colour on one

deselect the cursor keys and *DIGITAL 1 to select the joysticks. The pointer code will get confused if you don't deselect the old device before selecting the new one.

The commands to move the pointer round the screen are fairly straightforward. Having selected the device you require, the single command *POINTER, or *POINTER 1, will display the pointer on screen. Another command *FX22 is needed to allow the pointer to move. Touch the controls on the device you have chosen, and the pointer will move. No further program lines are needed for this—the pointer ROM controls it automatically.

So far so good! We have a pointer

moving round the screen. You'll notice when moving the pointer that it accelerates as it moves, and it does not corrupt text and graphics as it passes over them. This is all taken care of in the pointer ROM. The next step is to tell the rest of the program where the pointer is. This information is supplied by Basic's ADVAL function. ADVAL (7) gives the horizontal position (the X-axis) and ADVAL (8) gives the vertical position (the Y-axis). When you know where the pointer is, you have to write the appropriate code to check what else is at that point, and act accordingly.

Listing 1 on the yellow pages gives a practical example of all this. The set up procedure draws some random boxes. The pointer is then activated, and can be moved round the screen. If you press Copy (or Fire), the colour at the pointer tip is reported. I have deliberately kept the example simple to make the programming clear. You should be able to adapt this 'point' method for a number of purposes. If you change the program to run in mode 130, there are 16 possible colours to point to. Listing 2 is another application for the pointer, a program menu. When you press Copy or Fire, the program prints out which number you have selected. Of course, it could easily be modified to chain another program or call a procedure.

When writing your own programs using the pointer ROM, there are a few restrictions you should know about. You should never print on top of the pointer. If you are printing further data, it is best to turn off the pointer temporarily, and then turn it on again. Also, the pointer should be off during a screen clear or mode change.

Programming with sprites

The sprite system allows you to design and edit sprites using a full screen grid. Let's look at this first. If you have set up the sprite system as instructed, you'll have the desktop sprite set already installed. Type MODE 128 and then *SEDIT 15. The screen should look like figure 1. You are now in the sprite editor and can alter this sprite to be anything you want. The cursor keys will move the cursor (as shown in the bottom left corner) around the grid. There are a lot of keys to employ in the editor (see box right), and you would be wise to make up a keystrip like your View strip. Figures 2 to 4 show more sprites.

In the example given, which is a picture of a ROM chip, only part of the picture is shown enlarged. Moving the cursor to the edge of the visible grid will force other




Figure 1. The editor screen with part of sprite 15, a ROM chip, displayed

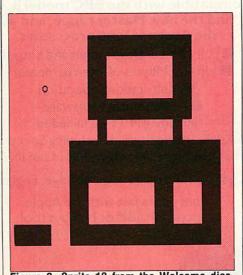


Figure 2. Sprite 13 from the Welcome disc

Sprite editor control keys

Cursor keys Move around grid Shift cursor keys Move eight cells CTRL cursor keys Move to sprite edge of sprite

- fo Pen up/down
- f1 Fill row
- f2 Fill column
- f3 Extend column
- f5 Insert row
- f6 Insert column
- f7 Mirror vertically
- f8 Mirror horizontally
- Shift-f3 Reduce column
- Shift-f4 Reduce row
- Shift-f5 Delete row Shift-f6 Delete column

foreground colour)

Return Plot pixel in current colour

1 to 9, A to F Select colour (current

colour shown on screen) Delete Plot a pixel in colour zero (back-

ground colour) Copy Plot a pixel in colour seven (text parts of the picture to come into view. The patterns are altered by changing the colour of each cell.

While working in two colour modes (0/128 and 4/132), you can set cells just using the Delete (for black) and Copy (for white) keys. The sprite size can be altered using extend and reduce commands. Also, insert and delete position the sprite in the cell space.

If you are going to animate your sprite you can save yourself a lot of work at a later stage by including a background border around it. This must be at least one cell on top and bottom, and on the left and right, eight cells in 80 column modes, four cells in 40 column modes, and two cells in 20 column modes.

The example program listing 3 will animate any sprite, but it is a bit flickery. If you have left the border around your sprite, you can delete the GCOL statement (line 80) and the second plot command (line 150), and the smoothness of the animation will improve remarkably.

To use the editor in other modes, and thus with colour, select the mode first, and then select your sprite for editing. The editor will continue in that mode and you will get automatic access to the extra colours. There are four colours in modes 1/5/129/133 and 16 in modes 2/130. The editor also works in mode 4/132, but not in the text-only modes. Colour is selected by pressing a number key zero to nine or letter key (A to F corresponding to 10 to 15). Return actually fills in the cell. Note that sprites produced in a certain screen mode can be displayed and used only in that mode. The editor is left by pressing Escape, which confirms the changes to the particular sprite that you have been editing.

Having produced one or more masterpieces, you'll want to save them. You can only save all the sprites in one go, so check what you've got in memory. The easiest way to do this is to type:

REPEAT : INPUT I% : V DU 23,27,0,1% : PLOT &ED ,640,512 : UNTIL FALSE

Keep typing sprite numbers, and pictures or a 'doesn't exist' message will appear. Any surplus sprites can be deleted by *SDELETE, then *SSAVE "PIX" will save the sprites to disc file called Pix. To use those sprites again, type *SLOAD PIX.

Next we display the sprite. Actually you've already used the display commands in the above line. VDU 23,27,0,1% will select sprite I% for display, and PLOT

L A B O R A T O R Y W O R K S T A T I O N F O R Y O U R C O M P U T E R

Professional instrumentation with the 1401 intelligent laboratory interface

Compatible with the BBC model B, B+ and the new Master range, and all the Acorn second processors.

- Full 12 bit analogue input and output
- Up to 2 Mbytes of internal memory
 - Multi-tasking operation
 - Full laboratory software including FFTs is included
- Application programs including Spectrum Analyser, Signal Averager, PSTH and INTH.

Designed and made in Cambridge, England

It runs just as fast with the Apple, Apricot, HP, IBM or Nimbus too!



&ED,X,Y displays sprite I% with its bottom left-hand corner at X,Y on the screen. Instead of VDU 23,27,0 there is a command SCHOOSE followed by a number. Typing the following:

*SCHOOSE 0 PLOT &ED,0,0

would place sprite zero at the bottom left of the screen. There must, of course, be a sprite zero defined or loaded in, and the screen mode must be correct, for it all to work properly. The sprite is removed from screen by normal techniques, either clearing that part of the screen or 'Exclusive-ORing' the sprite. There isn't space here to say why, but if you select GCOL 3,1 and plot some graphics, and plot the same graphics again in exactly the same place, the screen returns to the display present when you started. Listing 3 uses this. It plots a sprite, then plots it again, making it disappear. The variables are altered and the process is repeated further along the screen. The eye is tricked into thinking that it is animation, although it is, as I have said, rather flickery, and there are better animation techniques.

The sprite system has a few other useful features. The *SEDIT command allows you to take an already defined sprite to use as the basis for new sprite. If you typed *SEDIT 3,8 the picture for sprite three would appear in the editor, ready for alteration, but when you press Escape, the revised picture would become sprite eight. SDELETE will delete several sprites ie, *SDELETE will delete several sprites ie, *SDELETE 3,4,5,6 and *SRENUMBER 12,2 will copy the picture in sprite 12 into sprite two, delete sprite 12, and lose the old version of sprite two as well. A summary of sprite commands is available at any time by typing *HELP SPRITES.

One way of defining sprites is particularly suitable where you already have the picture in a program. The *SGET command (or VDU 23,27,1...) will read in an area of screen defined by the last two graphics points, and make it into a sprite.

MOVE1000,0:MOVE1279,255:*SGET 2 would copy a small rectangle in the bottom right-hand corner of the screen into sprite two, without using the editor at all.

I've really only scratched the surface of what you can do with the sprite system in this article. Once you've got the hang of designing sprites and putting them on screen, you should look up some of the articles in past issues of *Acorn User* on sprite design, and topics like 'aliases' – slightly altered versions of the sprites which are displayed consecutively to give

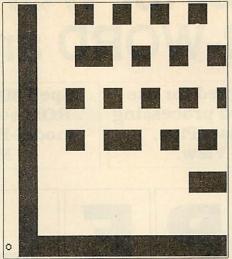


Figure 3. Detail of sprite 10




Figure 4. Sprite designed by David Atherton

effects such as walking. The system is quite good, and together with the very fast BBC Basic, it should be possible to write your own simple animated games.

Star (*) commands

SPRITE Activate sprite ROM and allow other commands

NOSPRITE Deactivate sprite ROM. Other commands do not work

SCHOOSE n Select sprite n for plotting ie, *SCHOOSE 5 VDU 23,27,0,n has an equivalent effect

SDELETE n(,m,p..) Delete sprite n (or multiple sprites) from memory

SEDIT n(,m) Define/edit sprite n (it may or may not already exist). Optionally take sprite n, edit it, and edited version becomes sprite m, ie, when generating aliases for animations. See page 105 for editor commands.

SGET n Define sprite n from screen memory. VDU 23,27,1,n; has an equivalent effect

SLOAD filename Load a file of sprites from disc

SMEARGE filename Load a file of sprites without wiping those in memory. If a number exists both in memory and in the file, the memory version is lost

SNEW Delete all sprites from memory SRENUMBER n,m Make sprite n into sprite m. Any old sprite m is overwritten. There is now no sprite n

SSPACE n Does nothing (accepted for BBC B compatibility)

Plotting

PLOT &ED,X,Y Plots sprite X,Y – obeys GCOL first parameter

PLOT &EE,X,Y Plots sprite outline rectangle in colour 15

PLOT & EF,X,Y As &ED, but acts as always GCOL 0

JARGON BOX

GCOL A BBC Basic command which determines the colour and manner in which the next graphics plotting shall take place

POINT A BBC Basic function which will return the colour of a given pixel on the screen

Pointer The small on-screen arrow that is moved by you to select something from the screen display

Pointer ROM The program that makes the pointer appear. It is not actually a ROM chip – it is a disc file, but it is written in ROM format, so people refer to it (and the sprite software) as a ROM. Sprite A small computer graphic picture or pattern, that can be placed anywhere on the screen, and animated.



Trackerball A ball mounted in a box (see picture above). Running your hand over the ball causes the on-screen cursor or pointer to move.

Turn to the yellow page index on page 113 for details of the sprite listings.

The ultimate spelling checker for WORDWISE, INTER-WORD and VIEW

Spell Master is designed for use with all the major word processing packages -Wordwise/Plus, Inter-Word and View.

Spell Master occupies just one ROM socket, easily fitted to a model-B, B+, B+128, Master or Master Compact.





Over 50,000 words are stored permanently in the basic dictionary ROM, easily extended by the user into sideways RAM and even ROM.



If you are unsure of the spelling of a word, a special 'fuzzy match' facility will list words which approximate to your guess at the spelling.



The speed at which words are checked is around **10,000 per minute...** much faster than any other spelling checker available.



At any time at all, whether in a word processor or not, a 'browse' facility will enable any area of the dictionary to be examined.



Because Spell Master is a ROM, it is always instantly available from within your word processor - no need to load it from disc each time.



Extra star commands provide many unusual facilities associated with words anagrams, crossword solutions, and so on...



The ultra-fast checking speed allows a convenient check-asyou-type mode to be used. In this mode, every word is instantly checked without loss of typing speed.



MONEY-BACK GUARANTEE: If you are not completely satisfied with Spell Master, we will refund the cost of any purchase made direct from Computer Concepts.

A more detailed specification is available upon request

Recommended retail price £51.30 + VAT (£59.00 inclusive)
Available direct from Computer Concepts and all good BBC dealers



Gaddesden Place, Hemel Hempstead Herts. HP2 6EX. Tel. (0442) 63933.

Telephone orders welcome • ACCESS & VISA accepted.

GOMPETTON

THE BEST BET

Write a horse racing program and win one of 25 copies of *The Punter's Revenge*

Simon Dally

The Punter's Revenge: Computers in the World of Gambling; Tony Drapkin and Richard Forsyth; 264 pp; Chapman and Hall; £7.95


This attractively produced book is an intelligent and informative insight into the world of gambling, how the 'authorities' use computers themselves and how the informed punter can use a home computer to assist selections.

One thing the book certainly doesn't set out to do is go for the computer freak; the programs in this book are simple to follow, would work on most computers, including BBC micros, and do no more than assume a passing acquaintance with Basic.

Just over half the book is devoted to horse racing – not surprisingly since probably no other gambling activity has a wider audience in the United Kingdom – and the rest is devoted to concise but sensible discussions of probability theory, what a 'book' is, the football pools, roulette,

blackjack and poker.

Like most good gambling books, this one tells you that it is completely ridiculous to imagine that when you win money by betting on horses you are 'caning the bookie', all you are doing is taking money off other punters. To illustrate this point see the table, which shows a horse race where a) the book is balanced and the bookie neither wins nor loses and b) a more likely table of odds, where anything in excess of 100 in the total is the bookie's profit. The formula to work out the difference between the odds quoted and the amount of money staked is as follows. Take the odds as written and add the two figures together, this is the bottom half of the fraction. Now make the right hand side of the odds the top of the fraction and multiply it by 100. The figure you get is the desired percentage. For example, three horses (or dogs, or whatever) are quoted at 3 to 1, 11 to 8 and 100 to 30 respectively:

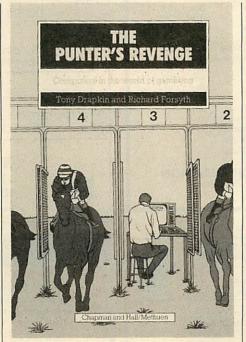

Horse	SP	%
Battling Beeb	evens	50
Angry Amstrad	6-4	40
Trailing Tandy	9-1	10
	Total	100
Table A. A round	d book	
Horse	SP	%
Battling Beeb	1-2	66.7
Angry Amstrad	3-1	25
Trailing Tandy	100-30	23.1
	Total	114.8

Table B. An overround book. Bookie's profit = 14.8%

 $3-1 \rightarrow 1/(3+1) \rightarrow 1/4 \rightarrow 100/4 = 25\%$ $11-8 \rightarrow 8/(11+8) \rightarrow 8/19 \rightarrow 800/19 = 42.1\%$

 $100-30 \rightarrow 30/(100+30) \rightarrow 3000/130 = 23.08\%$

Through this sort of approach, and with programs which could be modified to suit your own beliefs or instincts the authors

show you how you can use a computer to help you find not the dead certs (no such thing!) but vfm (value for money) bets, ie, bets where the odds on offer are higher than you should reasonably expect and therefore possibly worth a flutter.

The authors also give some detailed analysis of the football pools, pointing out that this really is a mug's game, with less than 30 per cent of the total staked being returned to the punters (avoid Zetters at all costs if this is your criterion!). However, they do indicate an interesting strategy of following a particular named newspaper columnist, Figaro of *Racing and Football Outlook*, and betting on his forecasted away wins as draws!

Roulette is covered in the book with tests on how to use the micro as a time-saving device when working out a system.

The book concludes with some fascinating remarks about blackjack (the only casino game where the odds, in theory at least, can be marginally turned to the punter's favour) and programming a computer to play poker; this latter chapter delves a little into the fascinating world of Artificial Intelligence.

Competition

This month's competition, easier than usual, is to write a program enabling a punter to analyse a horse race as shown in Table A, by entering the name of each horse and the quoted odds, and producing an overall view of the book and the bookie's profit.

Please enclose a listing and a sample output (preferably taken from real life).

Points will be awarded for neatness and clarity, and the 25 most elegant entries in the editor's opinion will each receive a copy of the book.

Entries to April Competition, Acorn User, 141-143 Drury Lane, London WC2B, 5TF to arrive by April 16, 1987.

DOUBLE PHANTOM?

YES! This IS the program demonstrated on BBC TV's "Micro Live". The Worlds first micro multi-user combat flight simulation is now available direct from DOCTOR SOFT via our 'HOT LINE' FIRST CLASS MAIL ORDER service.

DOUBLE PHANTOM is basically a TWO computer version of the highly acclaimed PHANTOM COMBAT simulation. At least one BBC must have a disc system. A hardware link (included) then links the machines which become separate aircraft sharing the same airspace, each VISIBLE and VULNERABLE to the other!

DOUBLE PHANTOM has all the usual PHANTOM features including the fastest and smoothest 3D colour graphics around (15fps). RAF Phantom pilot Paul Courtnage's verdict: "Marvellous . . . quite the best micro flight simulation I've ever seen ... Totally captivating!"

Phone: Mail Order Hot line 0903 776000 with VISA/ACCESS. Mail: PO BOX 66, East Preston, West Sussex BN16 2TX. Most orders despatched SAME DAY, FIRST CLASS, POST FREE.

DOUBLE PI	HANTOM (inc link)		BBC	*	disc	19.95
LINK separa	ately		BBC		cable	9.95
PHANTOM	COMBAT		BBC	*	disc	12.95
PHANTOM	COMBAT	Electron &	BBC		cass	9.95
747			BBC	B only		9.95
747				B only	cass	8.95
747		Electron			cass	7.95
747	Commodore 64				cass	
747	Commodore 64					14.95
747	Commodore 64	USA format)		Charles and Charles	14.95

(Overseas orders, equiv currency, add air mail at cost) JOYSTICKS optional with all programs BBC means all machines from 32k up * SPECIFY DFS when ordering discs £2 discount on multiple order

DOCTOR SOFT - THE FLIGHT SIMULATION SPECIALIST



since 1970

ALL DISCS TESTED INDIVIDUALLY **100% GUARANTEED**

51/4"	S/S DD D/S DD	96TPI	10' 10'S	£8.00 £8.50
31/2"	S/S DD	30111	10'S	£15.95
	D/S DD		10'S	£19.95

FREE LIBRARY BOX WITH 10'S V.A.T. AND POST/PACK, INCLUDED

BULK PURCHASE DISCS

		50	100	250
51/4"	S/S DD	£27.50	£50.00	£120.00
	D/S DD (96)	£32.50	£60.00	£145.00
3"	ĆF2		10'S	£27.95
3"	CF2		5'S	£14.75
	All diago of main	. F		

All discs of major European manufacturer complete with Hub Rings, Labels etc

STORAGE BOXES

Lockable, anti-static, storage box, holds 50 51/4" discs, complete with divders, keys etc

SPECIAL OFFERS OR only £2.50 when purchased with fifty discs.



NEVIS RECORDS LTD. 76 MUSWELL HILL ROAD LONDON N10. 01-883 7656

See us on Prestel, page 258880082



£7.95

SQUIRRELSOFT

The new 'CARE' range of programs:
The Master, Master Compact, BBC-B & B+, and Electron.

INVESTMENT CARE — £13.95
Keeps track of all UNIT TRUSTS, SHARES etc. Produces displays & printouts of Capital Gains. Dividends. Current Holdings valuations showing Quantities. Bid/Offer prices. Values. Gains/Losses, APR., HiVal %, etc.

CASH CARE – £11.95
Bank account AND Savings account. Full Analysis – 60
categories. Budget Forecasts. 3-D Bar Charts. Password
Protection. Easy storage of data. Printouts of all accounts and
Ray Charts.

BUILDING SOCIETY CARE — £9.95
Checks the complex interest calculations involved on a day to day basis. Shows interest earned to date. Spreadsheet display. Easy storage of data. Printout of account to date.

VAT CARE — £14.95
225 Sales AND 225 Purchases each month (BBC). Three month period. ALERT warning if VAT 2% or more incorrect. Easy storage of data. Printout with month & 3 monthly totals.

The CARES DISK - £24.95 - comprising all four Cares utilities.

This disk is less than 50% of the total cost of the individual programs.

NEW RELEASE:-

"TV DIRECTOR" — Make your own VIDEO (using all BBC micro colours) on VHS or Betamax with this program which includes this suite of purpose-built programs:—
"Picture maker"— 'Gallery'—'Program review' 'Gallery' includes one TX and 8 P/V monitors, A&B bank vision mixer to provide cuts, fades, & dissolves, opening & closing credits. Sample picture datafile provided to get you going — choose your own soundtrack & record the result on to any suitable videorecorder — £14.95.

PLUS our range of QUALITY games: Supergolf – £7.50 Trafalgar – £8.00 Polar Perils – £7.95 Bunfun – £6.50 THE GAMES DISK £14.95 COMPILATION OF GAMES PROGRAMMES

This disk is less than 50% of the total cost of the individual programs.

☐ 40TK ☐ 80TK ☐ 3.5" ☐ 51/4" I HAVE A BBC: ☐ B ☐ B+ ☐ MASTER ☐ COMPACT

ENCLOSED £ OR DEBIT MY ACCESS CARD NO. NAME

Dept AU4, Bindloss Avenue, Eccles, Manchester M30 ODU Please phone 061/789 4120 for further information



BBC B MASTER **ECONET**

Oxford Pascal is the most popular full

extended implimentation of PASCAL for Acorn machines

"The code produced is very compact" Acorn User

"I can wholeheartedly recommend it to Pascal novices and experts alike" Computer Weekly.

The Oxford Pascal package contains

1) A Resident compiler. This compiler runs entirely in RAM and provides a very fast and convenient way to learn the language and debug programs. Using the resident compiler is like using a BASIC interpreter in that programs are ready to run in seconds.

2) A full disk to disk compiler producing relocatable object files. This compiler is capable of compiling very large programs (e.g. the compiler itself!)

3) The LINKER. This extension to standard Pascal allows you to break up programming tasks into small separately compilable files and then link them together into a single object module. Whenever you make a change to a file you need only compile that file and relink. Because you can work with short files you can use the resident compiler even for developing large programs.

The LINKER also allows the building of libraries.

4) The LOCATOR. This utility allows you to produce stand alone programs which run on any machine without the Pascal system.

Oxford Pascal allows many extensions to standard Pascal including:

* program chaining * Machine code calls with parameters

sound extensions

Random numbers

ECONET USERS

- Machine code calls with part etc)
 Graphics (Move, draw, plot etc)
 Trainal numbers and I/O
- Bit manipulation
- * String input * Clock access Peek, Poke etc
- * Run time error trapping
- AND MORE

Oxford Pascal is now available for the ECONET with BBC B or MASTER stations and is installed in numerous educational sites in the UK and Europe. Call us for details.

I IIIS IIIOITU	n s specia	orrer.		20 1
Oxford disk	Pascal for	the BBC B	£49295 €	39.95

3.3.0.E. 10D 1	TORCESTER!	LACE, OXI	OND ON	2) **	Tel: (0003) 3417	3
Please rush me: -	OXFORD PASCAL	FOR THE BBC	B (DISK) £39	.95	(CASSETTE) £34.95	

OXFORD PASCAL FOR THE MASTER (DISK) £59.95

OXFORD PASCAL	ECONET INFO PACK FREE
l enclose cheque/postal order for	Male Religion of the Control of the
(prices include VAT, please add £1.00 pp	UK. £3.00 overseas).

NAME **ADDRESS**

MAKE ALL CHEQUES PAYABLE TO S.S.O.L Allow 14 days for delivery.




LAN




COMPUTER SYSTEMS LTD

Bringing the World of Technology to your fingertips

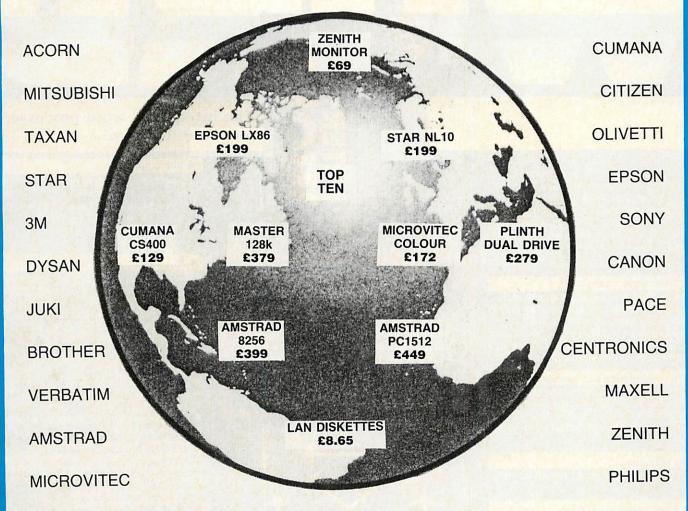

Spring Education Catalogue Available Now

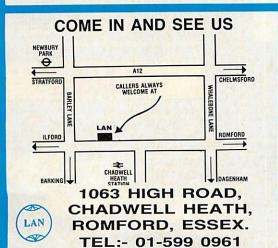

HOW TO ORDER



Enclose letter with cheque, postal order or credit card number for total amount including VAT and delivery charge. Credit card holders may order by telephone. Dispatch normally in 24 hours. Contact Sales Desk.

OFFICIAL ORDERS from Education Establishments, Local Authorities and Government departments welcome. Contact Education Department.

DEALER AND EXPORT enquiries Contact Trade Dept.

DELIVERY CHARGES

Below £10 add £1.50 Below £50 add £2.50

Below £100 add £3.50 Above £100 add £8.00

PRICES EXCLUSIVE OF V.A.T. AND CORRECT AT TIME OF GOING TO PRESS.

Education callers ask for:



Tony Judge or Mike Brown



ACORN USER APRIL 1987

111

INTER-WORD is fast, efficient and simple to use. Being menu operated the newcomer does not need to remember strange key combinations or command names. The menus are not a burden to the experienced user since there are shortcuts to access many of the features.

Some of its special features are:

On screen style changes

Underline, bold and a special dotted style are shown on screen exactly as they would appear on the final printout. Also left, centred and right justified text is shown on screen as you edit. What you see on screen is really what you get on the printout.

Multiple documents in memor

Most people do not work on one document at a time. INTER-WORD allows up to 16 documents to be stored in memory at once, and text to be transferred from one to another.

Built in facilities for printing text in up to 5 columns.

Pull down menu operation

Simple and fast selection of all INTER-WORD options and page layout.

Multi-file operation

Very large documents can be handled with ease. INTER-WORD's unique multi-file mode puts virtually no limits on document size and allows simple and fast movement to any point in the document.

Specific page printing

Any page or range of pages may be printed, even in multi-file mode, with any number of copies.


discount

Available to all WORDWISE PLUS owners. Simply quote your serial number, name and address when ordering direct. Discount price; £39.20 + VAT (£45.08 incl.)

word processo for the BBC Mic

"INTER-WORD is the most powerful and comprehensive word processor available for the BBC today. It is more powerful and flexible than View and still retains much of the friendliness and ease of use of Wordwise. Inter-Word looks set to become the standard word processor for the BBC Micro."

Computer Concepts



Inter-Word is part of the 'ROM Link' series which is the only truly integrated suite of ROMs for the BBC micro.

£49.00+vat (£56.35)

Computer Concepts

Gaddesden Place, Hemel Hempstead, Herts HP2 6EX, England. Telephone (0442) 63933

The integrated word processor for the BBC micro

Block operations

These are common to most word processors, but with INTER-WORD any part of the text can be marked and then instantly moved, copied, deleted, printed, saved, underlined etc. There is no limit to the amount that can be marked.

Automatic re-formatting

This enables the user to just type—no keys to press to re-format the paragraph after changes to the text or margins have been made; the margins on the rulers can simply be dragged, all text being instantly reformatted to the new settings.

40, 53, 80 and 106 column screen

- Mail merge
 Integrates with all other parts of INTER family
- Automatic page numbering, with headers and footers
- Very fast and smooth scrolling
 Powerful search and replace facilities including wildcards, upper/lower case sensitivity, stored search and replace strings for instant re-use
- Automatic word count
 Fast simple cursor movement to any

- Easily tailored to any printer
 Line numbering
 Selectable screen colours
 Compatible with the B, B+ and Master;
 Solidisk, Aries and Watford shadow RAM boards.

MONEY-BACK GUARANTEE

Buy INTER-WORD—if you don't like it—send it back for a full refund!

(Available when purchased directly from Computer Concepts)





Access/Barclaycard accepted. All orders despatched within 24 hours.

all Pac Micros Compatible

INDEX/COMPATIBILITY

Entering listings

To make the task of entering listings easier, Acorn User has adopted several standards in the Yellow Pages. Programs are listed with line numbers in increments of 10, so type AUTO <Return> for automatic line numbering before you start. Before you list what you've entered, type LISTO 1 <Return> to provide spaces after the line numbers. Programs in the Yellow Pages are often listed to a width of 40 characters, so type MODE 6 <Return> before you start. Comparing the line-endings of your listing with the Yellow Pages will help you spot extra or missing characters.


To make sure that the program you want to enter will work on your particular machine, check the index below. All the listings work with Basic 1,2 and 4 (unless stated otherwise) and with operating system OS1.2 or above. If a program is accompanied by an article, please read the article first. If special care is needed when entering, we provide a 'How to Enter' box.

Once you've typed in your program, save it to tape or disc then test it by running it. If you have a major problem with a listing, ask someone to check it. You can also send off for a list of *Checksums* which help you find the errors. Send a large SAE (26p stamp) to *AU* Checksums, PO Box 641, London NW9 8TF.

MICRO MUSIC

114

With the help of our programs you can compose musical scores



DOING IT ON THE SIDE

124


Have you ever had problems with printing wide documents? Try this program



PRESENTING POINTER PICTURES

125

The Compact comes with sprites and a sprite editor for you to design your own



DISCS AND TAPES



All the listings on these pages can be found on this month's listings disc or cassette. See page 109 for details.

BACK ISSUES





For help with entering and debugging listings see the following back issues: April '86, June '85, Aug '84, Sept '83.

Program	Page	ввсв	BBCB+/ 128k	BBC with ADFS	Shadow RAM	Electron	Electron with Plus 1	Electron with Plus 1 & Plus 3	Master 128	Master 128 + ADFS	Master Compact	6502SP	Econet	Monthly tape & disc
David Acton														Milanali
Listings 1-5	114	1	1	J	1	×	×	×	1	J	1	×	1	1
Dave Lawrence			1000	9 . Sy (X)	TERRE	Ny grante	THE MELLINE							
Listings 1-2	117	1	1	1	1	×	×	×	1	J	1	×	1	1
Cornford Wood											TANK STEWN			
Listings 1-2	122	√1	11	11	11	×	×	×	11	11	×	×	11	1
Knight		E SKOL												
Listing 1	124	J	J	1	1	×	×	×	1	1	J	1	1	1
David Atherton														
Listing 1-3	125	J^2	J^2	J^2	J^2	×	×	×	×	×	1	×	1	1
First Byte				F. State										
Listings 1-2	126	×	1	×	×	×	×	×	1	1	J	×	1	1
Hints & Tips											The sales			
Listing 1-4	127	1	1	1	1	1	J^3	J ³	1	1	J	1	1	J
1 Requires Music 500 2 Listing 3 works with G. 3 Listing 1 and 2 only with	XR ROM h Electron													

MUSIC

Micro Music, page 81

```
Listing 1. Sample Autumn file creator
     10 REM Sample AUTUMN file creator
     20 REM by Dave Acton
30 REM for BBC B/B+/M/C
     40 REM (c) Acorn User April 1987
     50 :
     60 MODE 6
     70 DIM data% 1000, env%(13), save% 20
     BO :
     90 total%=0
    100 FOR e%=1 TO 291
    110 READ byte%:total%=total%+byte%
    120 NEXT
    130 IF total%<>17386 PRINT"Checksum err
 or - please check DATA": END
    140 RESTORE
    150 :
    160 FOR e%=1 TO 13:READ env%(e%):NEXT
    170 p%=data%+6
    180 FOR voice%=0 TO 1
    190 PROCpoint (voice%)
    200 PRINT"Compiling voice "; voice%+1
    210 ?p%=254
    220 FOR e%=1 TO 13
    230 p%?e%=env%(e%)
    240 NEXT
    250 p%=p%+14
    260 REPEAT
    270 PROCnext
    280 IF byte%<255 PROCnext
    290 UNTIL byte%=255
    300 NEXT voice%
    310 p%=p%-1
320 PROCpoint(2)
    330 $save%="SAVE SAMPLE "+STR$~data%+"
  "+STR$~(p%+1)
    340 X%=save%: Y%=save% DIV 256
    350 PRINT"Saving 'SAMPLE'
    360 CALL &FFF7
    370 END
    380 :
    390 DEF PROCpoint (k%)
    400 pointer%=p%-data%:loc%=data%+2*k%
410 ?loc%=pointer%
    420 loc%?1=pointer% DIV 256
    430 ENDPROC
    440 :
450 DEF PROCnext
    460 READ byte%:?p%=byte%:p%=p%+1
    470 ENDPROC
    480
    490 DATA 1,0,0,0,1,1,1,80,0,0,253,80,80
    500
    510 DATA 17,8,0,8,0,2,65,2,109,2
520 DATA 101,2,93,2,85,2,81,2,73,2
    530 DATA 65,4,93,4,61,4,93,4,65,4
    540 DATA 45,4,33,4,45,4,17,4,65,4
550 DATA 53,4,65,4,25,8,0,8,0,4,73,4
560 DATA 61,4,73,4,33,8,0,8,0,4,65,4
    570 DATA 81,4,93,4,53,4,93,4,89,4
    580 DATA 101,4,61,4,93,2,85,2,93,4
590 DATA 73,4,45,4,73,4,93,12,255
    600
    610 DATA 141,2,161,2,157,2,149,2
    620 DATA 141,2,133,2,129,2,121,2
    630 DATA 113,1,121,1,113,1,121,1
    640 DATA 113,4,0,4,121,4,129,2,113,2
650 DATA 109,2,113,2,141,2,121,2
660 DATA 113,2,121,2,129,2,133,2
    670 DATA 129,2,121,2,113,2,129,2
    680 DATA 121,2,133,2,129,2,149,2
    690 DATA 145,2,149,2,161,2,157,2
700 DATA 149,2,141,2,137,2,141,2
    710 DATA 137, 2, 129, 2, 121, 2, 137, 2
```

Continued ▶

```
Autumn listing 1 continued
720 DATA 129,2,141,2,137,2,157,2
730 DATA 149,2,157,2,169,2,161,2
740 DATA 157,2,149,2,141,2,149,2
750 DATA 141,2,137,2,129,2,141,2
760 DATA 149,2,157,2,161,2,177,2
770 DATA 169,2,177,2,189,2,181,2
780 DATA 177,2,169,2,161,2,177,2
790 DATA 169,2,177,2,197,2,189,2
800 DATA 185,2,177,2,197,2,189,2
800 DATA 185,2,177,2,169,2,161,2
810 DATA 157,2,149,2,157,2,141,2
820 DATA 149,2,137,2,141,1,149,1
830 DATA 141,1,149,1,141,16,255
```

```
Listing 2. Autumn file player (Basic)
     10 REM AUTUMN file player (Basic)
     20 REM by Dave Lawrence/Dave Acton
30 REM for BBC B/B+/M/C
     40 REM (c) Acorn User April 1987
     50
     60 MODE 7
     70 HIMEM=&6000: S%=&6000
     80 DIM p%(3),d%(3),env% 14
     90
    100 INPUT"AUTUMN file name
    110 DSCLI("*LOAD "+name$+" 6000")
    120 REPEAT
    130 INPUT"Tempo (1=fastest) : "tempo%
    140 UNTIL tempo%>0
    150 REPEAT
    160 INPUT"Repeat tune? Y/N : "rep$
    170 rep$=CHR$(ASC(rep$) AND &DF)
    180 UNTIL rep$="Y" OR rep$="N"
    190 REPEAT
    200 FOR 1%=0 TO 2
    210 p%(I%+1)=S%+?(S%+I%*2)+256*?(S%+I%
 *2+1)
    220 d%(I%+1)=FALSE
    230 NEXT
   240 REPEAT
   250 FOR I%=1 TO 3
   260 IF ADVAL (-5-I%) > 0 PROCsound
    270 NEXT
    280 UNTIL d%(1) AND d%(2) AND d%(3)
    290 UNTIL rep$="N"
   300 END
   310 :
   320 DEF PROCsound
    330 IF d%(I%) ENDPROC
   340 p%=?p%(I%):d%=?(p%(I%)+1)
350 IF p%=254 PROCenv:ENDPROC
360 IF p%=255 d%(I%)=TRUE:ENDPROC
   370 IF p%=0 V%=0 ELSE V%=1%
   380 SOUND 1%, V%, p%, d%*tempo%
   390 p%(I%)=p%(I%)+2
   400 ENDPROC
   410 :
   420 DEF PROCenv
430 IF ADVAL(-5-I%)<>15 ENDPROC
440 ?env%=I%
    450 FOR J%=1 TO 13
    460 J%?env%=?(p%(I%)+J%)
    470 NEXT
    480 X%=env%: Y%=env% DIV 256
    490 A%=B: CALL &FFF1
   500 p%(I%)=p%(I%)+14
    510 ENDPROC
```

```
Listing 3. Autumn file player (Play)

10 REM AUTUMN file player (*PLAY)

20 REM by Dave Acton

30 REM for BBC B/B+/M/C Continued
```

MUSIC

```
■ Autumn listing 3 continued

     40 REM (c) Acorn User April 1987
    50 :
    60 MODE 7
    70 DIM save% 40
    80 command=%F2:name=%70:addr=%72
    90 read=&74:fin=&76:free=&79
    100 start=&86:point=&88:voice=&8E
    110 tempo=&BF:string=&AEO
    120 osfile=&FFDD:osbyte=&FFF4
    130 osword=&FFF1:oscli=&FFF7
    140 FOR pass%=0 TO 2 STEP 2
    150 P%=&900
    160 COPT pass%
   170 .play
    180 LDY #4
   190 JSR skipspace
200 TYA
    210 CLC
    220 ADC command
   230 STA command
   240 LDA command+1
   250 ADC #0
   260 STA command+1
   270 LDY #0
   280 .copyloop
   290 LDA (command), Y
   300 STA string, Y
   310 INY
   320 CMP #32
   330 BNE copyloop
    340 LDA #13
   350 STA string, Y
    360 LDA #0
    370 LDX #15
   380 .clear
    390 STA addr, X
    400 DEX
    410 BPL clear
    420 JSR skipspace
    430 .decode
    440 LDA (command), Y
   450 CMP #32
    460 BEQ done
    470 CMP #ASC"0"
    480 BCC syntax
    490 CMP #ASC"9"+1
   500 BCC number
510 CMP #ASC"F"+1
    520 BCS syntax
    530 CMP #ASC"A"
    540 BCC syntax
    550 SBC #55
   560 JMP add
    570 .number
    580 EDR #48
    590 .add
    600 LDX #4
    610 .shift
    620 ASL addr
    630 ROL addr+1
    640 DEX
    650 BNE shift
    660 CLC
    670 ADC addr
    680 STA addr.
    690 INY
    700 BCC decode
    710 INC addr+1
   720 JMP decode
    730 syntax
    740 BRK: BRK
    750 ]: $P%="Syntax: *PLAY <name> <addr>
   <tempo>":P%=P%+LEN$P%
    760 COPT pass%: BRK
```

Continued ▶

```
■ Autumn listing 3 continued
     770 :
     780 .done
     790 LDA addr
     800 STA start
     810 LDA addr+1
     820 STA start+1
     830 JSR skipspace
     840 CMP #ASC"9"+1
     850 BCS syntax
     860 CMP #ASC"1"
     870 BCC syntax
     880 SBC #48
     890 STA tempo
     900 LDA #string MOD 256
     910 STA name
     920 LDA #string DIV 256
     930 STA name+1
     940 LDX #name MOD 256
     950 LDY #name DIV 256
     960 LDA #&FF
     970 JSR osfile
     980 JSR initpoint
     990 .repeat
    1000 LDA #3
    1010 STA voice
    1020 .voiceloop
    1030 JSR dovoice
    1040 DEC voice
    1050 BNE voiceloop
    1060 BIT &FF
    1070 BMI escape
    1080 LDA fin
    1090 AND fin+1
    1100 AND fin+2
    1110 BEQ repeat
    1120 RTS
    1130 :
    1140 .escape
    1150 BRK
1160 J:?P%=17:P%=P%+1
    1170 $P%="Escape": P%=P%+LEN$P%
    1180 COPT pass%: BRK
    1190 :
    1200 .initpoint
    1210 LDY #5
    1220 .copypoint
    1230 LDA (start), Y
    1240 STA point, Y
    1250 DEY
    1260 BPL copypoint
    1270 LDX #2
    1280 LDA #0
    1290 .finloop
    1300 STA fin, X
    1310 DEX
    1320 BPL finloop
    1330 RTS
    1340 :
    1350 .dovoice
    1360 LDX voice
    1370 LDA fin-1, X
    1380 BNE nosound
    1390 LDA #251
    1400 SEC
    1410 SBC voice
    1420 TAX
    1430 LDY #&FF
    1440 LDA #128
    1450 JSR osbyte
    1460 STX free
    1470 CPX #0
    1480 BEQ nosound
    1490 LDA voice
                                     Continued ▶
```

MUSIC

Autumn listing 3 continued

```
■ Autumn listing 3 continued
     1500 ASL A
     1510 TAY
     1520 LDA point-2,Y
     1530 CLC
     1540 ADC start
     1550 STA read
     1560 LDA point-1,Y
     1570 ADC start+1
     1580 STA read+1
     1590 LDY #0
     1600 LDA (read), Y
     1610 CMP #&FE
     1620 BNE notenv
     1630 JSR env
     1640 JSR next
     1650 JMP dovoice
     1660 .notenv
1670 CMP #&FF
     1680 BNE notfin
     1690 LDX voice
     1700 STA fin-1, X
     1710 JMP nosound
      1720 .notfin
     1730 JSR sound
     1740 .next
     1750 LDA voice
     1760 ASL A
     1770 TAY
      1780 LDA read
     1790 SEC
     1800 SBC start
     1810 STA point-2, Y
1820 LDA read+1
      1830 SBC start+1
      1840 STA point-1, Y
      1850 .nosound
      1860 RTS
     1870 :
      1880 .sound
      1890 STA pitch
      1900 JSR incread
      1910 LDA #0
      1920 LDX tempo
      1930 .howlong
      1940 ADC (read), Y
      1950 DEX
      1960 BNE howlong
      1970 STA dur
      1980 JSR incread
      1990 LDA voice
      2000 STA note
      2010 STA volume
      2020 LDA pitch
      2030 BNE notrest
      2040 STA volume
      2050 .notrest
      2060 LDX #note MOD 256
      2070 LDY #note DIV 256
      2080 LDA #7
      2090 JMP osword
      2100 :
      2110 .env
      2120 LDA free
2130 CMP #15
      2140 BEQ empty
      2150 RTS
      2160 .empty
      2170 LDA voice
      2180 STA pars
      2190 LDX #1
      2200 .envloop
      2210 JSR incread
      2220 LDA (read), Y
      2230 STA pars, X
```

```
2240 INX
2250 CPX
         #14
2260 BNE envloop
2270 LDX #pars MOD 256
2280 LDY #pars DIV 256
2290 LDA #8
2300 JSR osword
2310 :
2320 .incread
2330 INC read
2340 BNE nothigh
2350 INC read+1
2360 .nothigh
2370 RTS
2380 :
2390 .notspace
2400 INY
2410 .findspace
2420 LDA (command), Y
2430 CMP #32
2440 BNE notspace
2450 RTS
2460 :
2470 .space
2480 INY
2490 .skipspace
2500 LDA (command), Y
2510 CMP #32
2520 BEQ space
2530 RTS
2540 :
2550 .note
              BRK: BRK
2560 .volume BRK:BRK
2570 .pitch BRK:BRK
2580 .dur
              BRK: BRK
2590 .pars
2600 1: NEXT pass%
2610 $save%="SAVE PLAY 900 "+STR$~P%+"
"+STR$~play
2620 X%=save%: Y%=save% DIV 256
2630 PRINT"Saving *PLAY"
2640 CALL oscli
2650 total%=0
2660 FOR check%=&900 TO P%-1
2670 total %=total %+?check%
2680 NEXT check%
2690 IF total%<>52235 PRINT"Checksum er
```

Listing 4. To play music is the background 180 LDY #5

ror - please check listing"

2700 END

```
750 ]:$P%="Syntax: *EVENT <name> <addr>
 <tempo>":P%=P%+LEN$P%
  971 SEI
  972 LDA #event MOD 256:STA &220
 973 LDA #event DIV 256:STA &221
  974 CLI
 975 LDA #14:LDX #0:JSR osbyte
 976 LDA #230:LDX #255:LDY #0:JSR osbyte
 1110 BNE initpoint
2541 .event
2542 PHA: TXA: PHA: TYA: PHA
2543 JSR repeat
2544 PLA: TAY: PLA: TAX: PLA
2545 RTS
2610 $save%="SAVE EVENT 900 "+STR$~P%+"
"+STR$~play
2630 PRINT"Saving *EVENT"
2690 IF total%<>57347 PRINT"Checksum err
or - please check listing"
```

MUSIC

```
Listing 5. Event demonstration
      10 REM *EVENT Demonstration
     20 REM by Dave Acton
     30 REM for BBC B/B+/M/C
     40 REM (c) Acorn User April 1987
     50 :
      60 MODE 0:HIMEM=&2000
     70 *EVENT SAMPLE 2000 1
      80 PROCsquare (640, 512, 512)
      90 END
     100 :
     110 DEF PROCsquare(x%,y%,d%)
     120 IF d%<16 ENDPROC
     130 LOCAL x1%,y1%,x2%,y2%
140 x1%=x%-d%/2:x2%=x%+d%/2
     150 y1%=y%-d%/2: y2%=y%+d%/2
     160 MDVE x1%,y1%
170 DRAW x2%,y1%:DRAW x2%,y2%
     180 DRAW x1%, y2%: DRAW x1%, y1%
     190 PROCsquare(x1%, y1%, d%/2)
     200 PRDCsquare(x2%,y1%,d%/2)
     210 PROCsquare(x2%, y2%, d%/2)
     220 PRDCsquare(x1%, y2%, d%/2)
     230 ENDPROC
```

See Variations on a Theme, page 86

```
Listing 1. Loader for Music Editor (Theme)
      10 REM Loader for Music Editor
      20 REM by David Lawrence
      30 REM for BBC B/B+/M/C
      40 REM (c) Acorn User April 1987
      50 :
     60 MODE 7
      70 PROCcode
     80 PROCchecksum
      90 PROCVdus
     100 PROCenvs
     110 CHAIN "MUSIC2"
     120 :
     130 DEF PROCcode
     140 addr=&70
     150 FOR pass%=0 TO 2 STEP 2
     160 P%=&9CO
     170 COPT pass%
     180 .findend
     190 STA addr+1
200 LDY #0
     210 STY addr
     220 .loop
     230 DEY
     240 DEY
     250 CPY #&FE
     260 BNE notlo
     270 DEC addr+1
     280 .notlo
     290 LDA (addr),Y
     300 BNE got
     310 INY
     320 LDA (addr),Y
     330 BNE got2
     340 DEY
     350 JMP 100p
     360 .got2
     370 DEY
     380 .got
     390 STY addr
     400 RTS
     410 ]
     420 NEXT pass%
     430 ENDPROC
     450 DEF PROCchecksum
     440 T%=0
                                        Continued ▶
```

```
■ Theme listing 1 continued

      470 FOR I%=&900 TO P%-1
      480 T%=T%+?I%
      490 NEXT
      500 IF T%<>3992 PROCerror("code")
      510 T%=0
      520 FOR I%=1 TO 256
      530 READ V%
      540 TX=TX+VX
      550 NEXT
      560 IF T%<>13632 PROCerror("vdus")
      570 T%=0
      580 FOR I%=1 TO 208
      590 READ V%
      600 T%=T%+V%
      610 NEXT
      620 IF T%<>2581 PROCerror("envs")
      630 RESTORE
      640 ENDPROC
      450 :
      660 DEF PROCerror (a$)
      670 VDU 7
      680 PRINT "Checksum error in ";a$;"."
      490 END
      700 :
      710 DEF PROCVdus
      720 FOR 1%=128 TO 159
      730 VDU 23,1%
      740 FOR J%=1 TO 8
      750 READ V%
      760 VDU V%
      770 NEXT
      780 NEXT
      790 ENDPROC
      B00 :
      810 DEF PROCenvs
      820 M%=&A00
      830 FOR E%=0 TO 15
      840 ?(M%+E%*16)=E%+1
      850 FOR I%=1 TO 13
      860 READ V%
      870 ?(M%+E%*16+I%)=V%
      880 NEXT
      890 X%=E%*16 : Y%*&A : A%=8 : CALL&FFF
      900 NEXT
      910 ENDPROC
      920 :
      930 REM VDU data
      940 :
     950 DATA 0,0,60,102,66,102,60,0

960 DATA 12,12,124,204,204,204,120,0

970 DATA 12,12,124,252,252,252,120,0

980 DATA 14,15,125,252,252,252,120,0

970 DATA 0,12,12,12,12,12,12,12
     1000 DATA 0,14,15,13,12,12,12,12
    1010 DATA 0,14,15,13,14,15,13,12
1020 DATA 0,0,40,124,40,40,124,40
1030 DATA 32,32,44,50,34,44,48,0
    1040 DATA 0,16,16,28,20,28,4,4
    1050 DATA 0,0,0,0,0,192,192,0
1060 DATA 1,3,2,2,3,3,6,14
1070 DATA 128,192,64,192,128,0,0,0
1080 DATA 26,26,49,97,99,199,201,216
1090 DATA 0,0,0,0,192,240,24,152
    1100 DATA 204,68,96,56,15,0,6,7
1110 DATA 152,152,176,224,128,128,128,1
   28
    1120 DATA 127,128,128,220,124,8,0,0
1130 DATA 192,102,38,16,16,16,22,22
    1140 DATA 0,0,0,0,0,0,1,2
    1150 DATA 16,16,32,32,64,128,0,0
1160 DATA 0,49,31,2,4,4,8,8
    1170 DATA 8,4,6,6,6,12,24,16
                                                   Continued ▶
```

ACORN USER APRIL 1987

MUSIC

```
■ Theme listing 1 continued
    1180 DATA 8,4,14,17,32,32,16,8
    1190 DATA 0,0,0,126,126,255,0,0
1200 DATA 255,126,126,0,0,0,0,0
    1210 DATA 0,30,51,51,51,62,48,48
    1220 DATA 0,30,63,63,63,62,48,48
    1230 DATA 0,30,63,63,62,52,60,56
    1240 DATA 48,48,48,48,48,48,48,0
    1250 DATA 48,48,48,48,52,60,56,0
    1260 DATA 52,60,56,52,60,56,0,0
    1270
    1280 REM Envelope data
    1290
    1300 DATA 1,0,0,0,0,0,0,127,-1,-1,-1,12
   0,80
    1310 DATA 1,0,0,0,0,0,0,90,-1,-1,-1,90,
  50
    1320 DATA 1,0,0,0,0,0,0,40,-1,-1,-1,40,
  5
    1330 DATA 1,0,0,0,0,0,0,127,0,0,-127,12
  7,0
    1340 DATA 1,0,0,0,0,0,0,90,0,0,-90,90,0
    1350 DATA 1,0,0,0,0,0,0,40,0,0,-20,40,0
    1360 DATA 1,0,0,0,1,1,1,126,0,0,-3,126,
  126
    1370 DATA 1,0,0,0,1,1,1,80,0,0,-3,80,80
    1380 DATA 5,1,-1,0,1,1,1,126,0,0,-16,12
  6,126
    1390 DATA 3,1,-1,0,1,1,1,126,0,0,-16,12
  6,126
    1400 DATA 1,0,0,0,1,1,1,126,-B,-3,-3,12
    1410
   1420 REM Put your own envelopes here
    1430 :
   1440 DATA 1,0,0,0,0,0,0,0,0,0,0,0
   1450 DATA 1,0,0,0,0,0,0,0,0,0,0,0,0
   1460 DATA 1,0,0,0,0,0,0,0,0,0,0,0,0
   1470 DATA 1,0,0,0,0,0,0,0,0,0,0,0,0
   1480 DATA 1,0,0,0,0,0,0,0,0,0,0,0,0
```

```
Listing 2. The Music Editor
      10 REM The Music Editor
      20 REM by David Lawrence
      30 REM for BBC B/B+/M/C
      40 REM (c) Acorn User April 1987
      50 :
      40 ON ERROR GOTO 180
      70 *TV 0 1
      80 MODE 4 : HIMEM=&4C00
      90 PROCcheck
     100 PROCinit
     110 PROCwindows
     120 PROCscrn
     130 PROCedit
     140 MODE 4
     150 PROCstars
     160 END
     170 :
    180 PROCstars
     190 VDU 3
    200 PROCflash(1)
    210 REPORT : PRINT " at line "; ERL
    220 END
    230 :
    240 DEF PROCcheck
    250 PROCflash (0)
    260 T%=0
    270 FOR I%=1 TO 97
    280 READ V%
    290 T%=T%+V%
    300 NEXT
                                      Continued ▶
```

```
■ Theme listing 2 continued

     310 IF T%=9899 RESTORE : ENDPROC
     320 PRINT "Error in data." : VDU7
     330 PROCstars
     340 END
     350 :
     360 DEF PROCstars
     370 *FX 4
     380 *FX 12 3
     390 *FX 225 1
     400 *FX 200 0
     410 ENDPROC
     420 :
     430 DEF PROCinit
     440 DIM c%(3),ch$(5),P%(29),p%(3)
    450 DIM d%(3),a%(29),ac%(3,2),m%(3)
460 DIM up$(5),n%(2),E%(3)
     470 c1%=&4C00:c2%=&5000:c3%=&5400
     480 c%(1)=c1%:c%(2)=c2%:c%(3)=c3%
     490 notes%=512: mem%=2*notes%
     500 pgs%=notes%/8-1:S%=2:N%=1:ss%=-1
     510 nn%=-1:P%=0:pp%=-1:1n2=LN2
     520 nkey$="":rkey$="":T%=1:end%=FALSE
     530 *FX 4 1
     540 *FX 12 3
    550 *FX 225 140
560 *FX 226 150
    570 *FX 200 1
     580 FOR 1%=0 TO mem%-4 STEP 4
    590 IX!c1%=0:IX!c2%=0:IX!c3%=0
    600 NEXT
    610 FOR IX=1 TO 3:?(c%(I%))=15:?(c%(I%
  )+1)=8
    620 n%(I%-1)=1:E%(I%)=1:NEXT
    630 FOR I%=0 TO 5: READ ch1%, ch2%
    640 ch$(I%)=CHR$ch1%+CHR$8+CHR$10+CHR$
  ch2%
    450 NEXT
    660 FOR I%=0 TO 5: READ ch1%, ch2%
    670 up$(I%)=CHR$ch1%+CHR$8+CHR$10+CHR$
  ch2%+CHR$11
    680 NEXT
    690 FOR I%=0 TO 3:FOR J%=0 TO 2
    700 READ ac%(I%,J%):NEXT:NEXT
710 FOR I%=0 TO 5
    720 nkey$=nkey$+CHR$(140+I%)
    730 rkey$=rkey$+CHR$(150+I%)
    740 NEXT
    750 PROCflash(0)
    760 PRINTTAB(12); FNdouble ("The Music E
  ditor")
    770 PRINTTAB(12,2); STRING$(16,"~")
    780 PRINT'FNdouble("Please enter the k
  ey signature (eg: 1S,2F,<ret>) :");CHR$1
    790 PROCflash(1)
    800 REPEAT n$=GET$
    810 UNTILns=CHR$130R(n$>"0"ANDn$<"6")
    820 key$=FNgetkey
    830 nk%=VAL(n$):PROCflash(0):CLS
    840 ENDPROC
    850 :
    860 DEF FNgetkey
    870 IF n$=CHR$13 THEN ="N"
    880 PRINT CHR$11; FNdouble(n$); CHR$10;
    890 REPEAT key$=GET$
    900 UNTIL key$="S"ORkey$="F"
910 PRINT CHR$11; FNdouble(key$)
    920 =key$
    930 :
    940 DEF FNdouble(s$)
    950 ?&B0=128: X%=&B0: Y%=0: A%=&A
    960 CALL &FFF1
    970 FOR i%=1 TO LEN(s$)
                                      Continued >
```

MUSIC

```
◀ Theme listing 2 continued

      980 ?&70=ASC(MID$(s$,i%,1))
      990 X%=&70: CALL &FFF1
     1000 IF POS=39 PRINT'
     1010 VDU 23,128,7%71,!%71;!%72;!%73;7%7
    4,128,10,8
     1020 VDU 23,128,7&75, !&75; !&76; !&77; ?&7
    8,128,11
     1030 NEXT
1040 VDU 23,128,!&81;!&83;!&85;!&87;
     1050 =CHR$0
     1060
     1070 DEF PRODflash(s%)
1080 VDU 23,0,10,255-159*s%;0;0;0;0;
     1090 ENDPROC
     1100 :
     1110 DEF PROCwindows
     1120 VDU 28,32,12,39,0,11
1130 PRINTFNdouble("The")''FNdouble("Mu
    sic") ''FNdouble("Editor") ''
     1140 PRINT"By DavidLawrence"'"(c) AU 87"
     1150 COLOUR 129: COLOUR 0: GCOL 0,0
     1160 VDU 28,0,0,30,0,12
1170 VDU 28,32,12,39,12,12
     1180 VDU 28,32,31,39,14,12,26
1190 PRINTTAB(32,12); "Tempo: 1"
     1200 ENDPROC
     1210 :
     1220 DEF PROCECTA
     1230 RESTORE 5520
     1240 FOR I%=1 TO 29: READ P%(I%): NEXT
     1250 VDU 28,0,31,30,2,12,26
     1260 PRINTTAB(0,0); "Page: 0
                                         V1:
                                                 V2
         V3:
     1270 VDU 5
     1280 FOR st%=0 TO 2:FOR I%=2 TO 12
     1290 IF I%<>7 MOVE 0,st%*320+1%*20+10:P
   LOT 1,160,0
     1300 NEXT
     1310 MOVE 4,st%*320+250:VDU 139,140
1320 MOVE 4,st%*320+218:VDU 141,142
     1330 MDVE 4,st%*320+186:VDU 143,144
     1340 MOVE 4,st%*320+126:VDU 145,146
1350 MOVE 4,st%*320+94:VDU 147,148
     1360 IF key$<>"N" PROCkeysig
     1370 NEXT
     1380 VDU 4: PROCalter (key$, nk%)
     1390 FOR st%=0 TO 2
     1400 PRINTFNnumb(st%): NEXT
     1410 ENDPROC
     1420 :
     1430 DEF PROCalter (key$,nk%)
     1440 FOR IX=1 TO 29:a%(IX)=1:NEXT
1450 IF key$="N" ENDPROC
     1460 RESTORE 5580: a%=4
     1470 IF key$="F" RESTORE 5590:a%=-4
     1480 FOR IX=1 TO nk%: READ SX: REPEAT
     1490 P%(s%)=P%(s%)+a%:a%(s%)=a%/4+1
     1500 5%=5%+7
     1510 UNTIL s%>29: NEXT
     1520 ENDPROC
     1530 :
     1540 DEF PROCpage(p%)
     1550 FOR st%=0 TO 2
     1560 PROCstave(st%): NEXT
     1570 PRINTTAB(6,0); P%; " ";
     1580 ENDPROC
     1590 :
     1600 DEF PROCstave(st%)
     1610 R%=(2-st%)*10+2
     1620 VDU 28,5,R%+9,30,R%,12,26:GCGL0,0
     1630 FOR IX=2 TO 12
1640 IF IX<>7 MOVE 160, stX*320+1X*20+10
    :PLOT 1,832,0
```

1650 NEXT

```
■ Theme listing 2 continued

    1660 FOR 1%=0 TO 7
    1670 AX=c%(st%+1)+16*p%+1%*2
    1680 PROCnote(st%, I%+1, ?A%, A%?1,0)
    1690 NEXT: ENDPROC
    1700 :
    1710 DEF PROCkeysig
    1720 RESTORE 5550
    1730 IF key$="F" RESTORE 5560
    1740 READ C%: X%=64
    1750 FOR I%=1 TO nk%
    1760 READ H%: MOVE X%, st%*320+H%: VDU C%
1770 READ H%: MOVE X%, st%*320+H%: VDU C%
    1780 X%=X%+16: NEXT: ENDPROC
    1790 :
    1800 DEF FNnumb (c%)
    1810 VDU 31,13+c%*7,0,32,32,32,8,8,8
    1820 PRINT; n% (c%)
    1830 =CHR$0
    1840 #
    1850 DEF PROCcurs(st%,no%)
    1860 GCOL 3,1
    1870 PROC1 (1):PROC1 (3):PROC1 (15)
    1880 PROC1 (27): PROC1 (29)
    1890 ENDPROC
    1900 :
    1910 DEF PROC1 (1n%)
    1920 IF 1n%>29 OR 1n%<1 ENDPROC
    1930 MOVE 100*no%+72, st%*320+1n%*10
    1940 PLOT 1,78,0
    1950 ENDPROC
    1960 :
    1970 DEF PROCs1 (1n%)
    1980 IF 1n%>29 OR 1n%<1 ENDPROC
    1990 MOVE 100*no%+90,st%*320+ln%*10
2000 PLOT 1,48,0
    2010 ENDPROC
    2020 :
    2030 DEF PROCnote(st%,no%,pi%,du%,co%)
    2040 GCDL 0,co%: IF pi%=&FE PROCshowe(st
  %,no%,du%):ENDPROC
2050 IF pi%=0 AND du%=0 ENDPROC
    2040 W%=pi% AND 31:V%=st%*320+16+10*W%
    2070 H%=100*(no%+1):L%=LN(du%)/ln2
    2080 IF pi%=0 PROCrest(st%,no%,L%):ENDP
   ROC
    2090 DX=0:IF LN(duX)/1n2<>L% DX=TRUE
    2100 Z%=(pi%/32) AND 3:VDU 5
2110 IF W%<22 OR L%=5 MOVE H%,V%+32:PRI
   NTch$(L%);: V%=2 ELSE MOVE H%, V%-B: PRINTU
   p$(L%);:MOVE H%+36,V%:V%=-2
    2120 IF D% VDU 138,8
    2130 IF Z% VDU 8,8,134+Z%
    2140 VDU 4
    2150 IF W%=1 OR W%=15 OR W%=29 PROCs1 (W
    2160 IF W%<4 PROCs1 (3)
    2170 IF W%>26 PROCs1 (27)
    2180 IF co%=1 GCOLO,0:L%=(W%-1)OR1:PROC
   1 (L%-V%) : PROC1 (L%) : PROC1 (L%+V%) : PROC1 (L%
   +2*V%)
    2190. ENDPROC
    2200 :
    2210 DEF PROCrest(st%,no%,L%)
2220 VDU 5:V%=V%+192
    2230 IF L%<3 FOR Q%=0 TO 2-L%: MOVE H%+Q
   %*4, V%+Q%*8+12: VDU 149: NEXT: VDU 4: PROCd:
   ENDPROC
    2240 MOVE H%,V%:IF L%<>3 PLOT 0,0,20
2250 VDU 148+L%
2260 IF L%=3 MOVE H%,V%+32:VDU 150
    2270 VDU 4: PROCd
    2280 ENDPROC
    2290 1
                                          Continued ▶
    2300 DEF PROCE
```

Continued ▶

MUSIC

■ Theme listing 2 continued

```
2310 IF co%=1 GCOLO,0:PROC1(19):PROC1(2
  1):PROC1 (23)
  2320 ENDPROC
   2330 :
   2340 DEF PROCshowe(st%,no%,num%)
   2350 MOVE 100*(no%+1),st%*320+160
  2360 VDU 5:PRINTCHR$(num%+64):VDU4
2370 IF co%=1 GCOL 0,0:PROC1(15)
  2380 ENDPROC
   2390
  2400 DEF PROCuetvals
  2410 ad%=c%(S%+1)+16*P%+N%*2-2
  2420 pi%=?ad%:du%=ad%?1
  2430 ENDPROC
  2440
  2450 DEF PROCedit
  2460 PROCgetvals
  2470 REPEAT
  2480 PROCcurs(ss%,nn%)
  2490 IF P%<>pp% PROCpage(P%) ELSE PROCn
 ote(ss%,nn%,pi%,du%,0)
  2500 PROCcurs (S%, N%): PROCqetvals
  2510 PROCnote(S%,N%,pi%,du%,0)
  2520 REPEAT: *FX21,0
  2530 k$=GET$:ss%=S%:nn%=N%:pp%=P%
  2540 sh%=INKEY-1:ct%=INKEY-2
2550 PROCdo
  2540 UNTIL S%<>ss% OR N%<>nn% OR P%<>pp
 % OR end%
  2570 UNTIL end%
  2580 ENDPROC
  2590 :
  2600 DEF PROCdo
  2610 IF ks=CHR$136 PROCleft:ENDPROC
  2620 IF k$=CHR$137 PROCright: ENDPROC
  2630 IF k$=CHR$139 PROCup:ENDPROC
  2640 IF k$=CHR$138 PROCdown: ENDPROC
  2650 IF INSTR(nkey$,k$) PROCgetnate: END
PROC
 2660 IF INSTR(rkey$,k$) PROCgetrest:END
PROC
 2670 IF k$=CHR$13 PROCnextone: ENDPROC
  2680 IF INSTR("SFNO", k$) PROCaccident: E
NDPROC
 2690 IF k$=CHR$9 PROCplay:ENDPROC
2700 IF k$="." PROCdot:ENDPROC
 2710 IF k$=CHR$127 PROCdelete: ENDPROC
 2720 IF ks="I" PROCinsert: ENDPROC
 2730 IF ks="@" PROCfile: ENDPROC
 2740 IF k$>"0" AND k$<":" PROCtempo:END
PROC
 2750 IF k$=CHR$146 PROCenvel:ENDPROC
2760 IF k$="P" PROCdump
 2770 ENDPROC
 2780 :
 2790 DEF PROCleft
 2800 IF sh% AND P%>0 P%=P%-1
2810 IF ct% P%=0:N%=2
 2820 N%=N%-1:IF N%=0 N%=8
 2830 ENDPROC
 2840 :
 2850 DEF PROCright
 2860 IF sh% AND P%<pgs% P%=P%+1
 2870 IF ct% P%=pgs%: N%=8
 2880 N%=N%+1: IF N%=9 N%=1
 2890 ENDPROC
 2900 :
 2910 DEF PROCup
 2920 IF sh% S%=(S%+1)MOD3:ENDPROC
2930 IF pi%=&FE PROCnewenv(1):ENDPROC
2940 IF (pi% AND 31)<29 AND pi%<>0 PROC
newnote(pi%+1,du%)
2950 ENDPROC
2960 :
2970 DEF PROCdown
```

```
◆ Theme listing 2 continued

    2980 IF sh% S%=(S%+2)MOD3:ENDPROC
    2990 IF pi%=&FE PROCnewenv(-1):ENDPROC
    3000 IF (pi% AND 31)>1 PROCnewnote(pi%-
   1,du%)
    3010 ENDPROC
    3020
    3030 DEF PROChewenv(in%)
    3040 PROCcurs (S%, N%)
    3050 GCOL 0,1:PROCshowe (5%,N%,du%)
    3060 du%=du%+in%: IF du%=0 du%=16
    3070 IF du%=17 du%=1
    3080 ad%?1=du%
    3090 GCOL 0,0:PROCshowe(5%,N%,du%)
    3100 PROCcurs (5%, N%)
    3110 ENDPROC
    3120 :
    3130 DEF PROCgetnote
    3140 np%=pi%
   3150 IF pi%=0 OR pi%=&FE np%=15
   3160 PROCnewnote(np%, 2^(ASC(k$)-140))
   3170 ENDPROC
   3180 :
   3190 DEF PROCgetrest
   3200 PROCnewnote (0, 2^(ASC(k$)-150))
   3210 ENDPROC
   3220 :
   3230 DEF PROCnewnote(np%,nd%)
   3240 PROCnote(S%,N%,pi%,du%,1)
   3250 IF pi%=0 AND du%=0 n%(S%)=n%(S%)+1
  :PRINTFNnumb (S%)
   3260 pi%=np%:du%=nd%
   3270 PROCnote (S%, N%, pi%, du%, 0)
   3280 ?ad%=pi%:ad%?1=du%
   3290 ENDPROC
   3300 :
   3310 DEF PROCnextone
   3320 IF pi%=0 AND du%=0 PRDCnewnote(15,
  8) : ENDPROC
   3330 N%=N%+1: IF N%=9 N%=1:P%=P%+1: IF P%
  =pgs% VDU7:P%=P%-1:N%=8:ENDPROC
   3340 np%=pi%:nd%=du%:IF pi%=0 du%=0
3350 PROCsound(S%+1,pi%,du%)
   3360 PROCgetvals
3370 IF pi%<>0 OR du%<>0 pi%=np%:du%=nd
  %: ENDPROC
   3380 IF P%=pp% PROCnote(S%,N%,np%,nd%,O
  3390 ?ad%=np%:ad%?1=nd%
  3400 n%(S%)=n%(S%)+1:PRINTFNnumb(S%)
  3410 pi%=np%:du%=nd%
3420 ENDPROC
  3430 :
3440 DEF PROCplay
  3450 FOR IX=1 TO 3:p%(I%)=c%(I%)
  3460 m%(I%)=FNfindend(I%-1):!m%(I%)=-1
  3470 d%(I%)=TRUE:E%(I%)=1:NEXT
  3480 REPEAT
  3490 FOR 1%=1 TO 3
  3500 IF ADVAL (-5-1%) >0 AND d%(1%) PROCs
 ound(I%,?p%(I%),?(p%(I%)+1))
  3510 NEXT
  3520 UNTIL d%(1)+d%(2)+d%(3)=0 DR INKEY
 -99
  3530 IF INKEY-99 THEN *FX15
  3540 FOR I%=1 TO 3: !m%(I%)=0:NEXT
  3550 ENDPROC
```

3570 DEF PROCsound(\%,p%,d%)
3580 IF p%<>0 V%=E%(\%) ELSE V%=0:IF d%

3590 IF p%=&FF d%(I%)=FALSE:ENDPROC 3600 IF p%=&FE E%(\%)=d%:p%(\%)=p%(\%)+ 2:ENDPROC

3610 a%=(p%/32) AND 3:p%=p%AND31

=0 p%(v%)=p%(v%)+2:ENDPROC

3540 :

Continued ▶

Continued ▶

MUSIC

◀ Theme listing 2 continued

```
3620 p%=P%(p%)+ac%(a%,a%(p%))
 3630 SOUND VX, VX, pX, dX*T%
 3640 p%(v%)=p%(v%)+2
3650 ENDPROC
 3660 :
 3670 DEF FNfindend(s%)
 3680 A%=&50+s%*4: CALL &9C0
 3690 = ?&70+256*?&71+2
 3700 :
 3710 DEF PROCaccident
3720 IF du%=0 OR pi%=0 OR pi%=&FE ENDPR
OC
 3730 np%=(pi% AND 31)
 3740 IF k$="S" np%=np%+32
 3750 IF k$="F" np%=np%+64
 3760 IF k$="N" np%=np%+96
 3770 PROCnewnote(np%,du%)
 3780 ENDPROC
 3790 :
 3800 DEF PROCdot
 3810 IF du%=0 OR pi%=&FE ENDPROC
 3820 d=LN(du%)/1n2
 3830 IF d=INT(d) nd%=du%*1.5 ELSE nd%=d
u%/1.5
 3840 PROCnewnote(pi%,nd%)
 3850 ENDPROC
 3840 :
 3870 DEF PROCdelete
 3880 IF P%=0 AND N%=1 ENDPROC
3890 FOR I%=ad% TO FNfindend(S%) STEP 2
:! I%= I%! 2: NEXT
 3900 IF pi%<>0 OR du%<>0 n%(S%)=n%(S%)-
1:PRINTFNnumb (S%)
 3910 PROCsortout
 3920 ENDPROC
 3930 :
 3940 DEF PROCinsert
 3950 IF P%=0 AND N%=1 ENDPROC
 3960 IF P%=pgs% AND N%=8 ENDPROC
 3970 FOR I%=FNfindend(S%)-2 TO ad% STEP
 -2: ! I%=I%!-2: NEXT
 3980 ?ad%=0:ad%?1=0:PROCsortout
 3990 ENDPROC
 4000 :
 4010 DEF PROCsortout
 4020 p%=P%:PROCstave(S%)
 4030 PROCcurs(S%, N%): PROCgetvals
 4040 ENDPROC
 4050 :
 4060 DEF PROCfile
 4070 VDU28,32,31,39,14
4080 PRINT" ";FNdouble("Filing")'''
 4090 PRINT'"Please"'"select"'"option:"
4090 PRINT'"Please"'"Select" "option:"
4100 PRINT'"1) Save"'"2) Load"'"3) Fina
14) Exit"'"5) Quit"
4110 PRINT'" ";FNdouble("Which?");CHR$1
 4120 PROCflash(1): *FX21,0
 4130 REPEAT: k$=GET$
 4140 UNTIL k$>"0" AND k$<"6"
 4150 IF k$="1" PROCsave
 4160 IF k$="2" PROCload
 4170 IF k$="3" PROCfinal
 4180 IF k$="4" VDU 12,26:PROCflash(0)
 4190 IF k$="5" end%=TRUE
 4200 ENDPROC
 4210 :
 4220 DEF PROCSave
 4230 name$=FNname
 4240 CLS:PRINTFNdouble("Writing.")
 4250 ch%=OPENOUT (name$)
 4260 PRINT#ch%, key$, nk%
 4270 FOR 1%=0 TO 2
 4280 PRINT#ch%,n%(I%):NEXT
4290 FOR I%=c1% TO &5800
                                        Continued ▶
```

◀ Theme listing 2 continued

```
4300 BPUT#ch%, ?I%
 4310 NEXT: CLOSE#0
 4320 VDU 12,26: ENDPROC
 4330 :
 4340 DEF FNname
 4350 REPEAT: CLS
 4360 PRINT"Enter a"'"filename"'">";
 4370 INPUT""name$
 4380 ch%=OPENIN(name$)
 4390 1%=EXT#ch%: CLOSE#0: yn$="Y"
 4400 IF 1%>0 PRINT'"Replace ?";:REPEATY
n$=GET$: UNTILyn$="Y"ORyn$="N"
 4410 UNTIL yn$="Y":PROCflash(0)
 4420 =name$
 4430 :
 4440 DEF PROCload
 4450 REPEAT
 4460 CLS:PRINT"Enter"'"filename"'">";
 4470 INPUT""name$
 4480 ch%=OPENIN(name$)
 4490 1%=EXT#ch%:CLOSE#0:ok%=TRUE
 4500 IF 1%=0 PRINT'"No such"'"file.":ok
%=FALSE
4510 IF 1%<>&C18 AND ok% PRINT'"Not a"'
"Music"'"file.":ok%=FALSE
 4520 IF NOT ok% PRINT'"<SPACE>";:q%=GET
 4530 UNTIL ok%: PROCflash(0)
 4540 CLS:PRINTFNdouble("Reading.")
4550 ch%=OPENIN(name$)
4560 INPUT#ch%,key$,nk%
4570 FOR I%=0 TO 2
 4580 INPUT#ch%,n%(I%):NEXT
 4590 FOR I%=c1% TO &5800
 4600 71%=BGET#ch%
 4610 NEXT: CLOSE#0
 4620 P%=0:N%=1:S%=0:pp%=-1
 4630 nn%=-1:55%=-1
 4640 CLS: PROCSCTN: ENDPROC
 4650 :
 4660 DEF PROCfinal
 4670 names=FNname
 4680 CLS:PRINTFNdouble("Writing.")
 4690 ch%=OPENOUT(name$)
 4700 BPUT#ch%, 6: BPUT #ch%, 0
 4710 add%=6:FOR I%=0 TO 1
 4720 J%=0: REPEAT
 4730 p%=?(&4C00+1%*&400+J%)
 4740 d%=?(&4CO1+I%*&400+J%)
 4750 IF p%<>0 OR d%<>0 add%=add%+2
4760 IF p%=254 add%=add%+12
 4770 J%=J%+2:UNTILJ%=&400:add%=add%+16
 4780 BPUT#ch%, add% MOD 256
 4790 BPUT#ch%, add% DIV 256
 4800 NEXT
 4810 FOR 1%=0 TO 2
 4820 PRINT'FNdouble("Voice "+STR$(I%+1)
 4830 PROCwrenv(1)
 4840 FOR J%=0 TO &3FE STEP 2
 4850 p%=?(&4C00+1%*&400+J%)
 4860 d%=?(&4CO1+I%*&4OO+J%)
 4870 IF p%=%FE PROCwrenv(d%) ELSE PROCw
rnote
 4880 NEXT
 4890 BPUT#ch%, 255: BPUT#ch%, 255
 4900 NEXT: CLOSE#0
 4910 VDU 12,26: ENDPROC
 4920 :
 4930 DEF PROCWrenv(d%)
 4940 BPUT #ch%,&FE
 4950 FOR by%=1 TO 13
4960 BPUT #ch%,?(&9F0+d%*16+by%):NEXT
 4970 p%=0:d%=0
                                      Continued ▶
```

121

MUSIC

See Sing Along A Micro, page 90

```
■ Theme listing 2 continued

     4980 ENDPROC
     4990 :
     5000 DEF PROCErnote
     5010 a%=(p%/32)AND3:p%=p%AND31
     5020 p%=P%(p%)+ac%(a%,a%(p%))
5030 IF p%<>0 OR d%<>0 BPUT #ch%,p%:BPU
   T #ch%,d%
     5040 ENDPROC
     5050 :
     5060 DEF PROCtempo
     5070 T%=VAL(k$): VDU 31,39,12,ASC(k$)
     5080 ENDPROC
     5090 :
    5100 DEF PROCenvel
    5110 PROCnote(S%,N%,pi%,du%,1)
    5120 IF pi%=0 AND du%=0 n%(S%)=n%(S%)+1
   :PRINTFNnumb (S%)
    5130 pi%=&FE:du%=1:GCOLO,0
    5140 PROCshowe (S%, N%, du%)
5150 ?ad%=pi%:ad%?1=du%
    5160 ENDPROC
    5170 :
    5180 DEF PROCdump
    5190 VDU 28,32,31,39,14
5200 PRINTFNdouble("Printer") "FNdouble
   ("Dump")
    5210 PRINT' "Sure ?";:*FX 21,0
    5220 PROCflash(1)
    5230 REPEAT: yns=GETs
    5240 UNTIL yns="Y" OR_yns="N"
    5250 IF yns="N" VDU 12,26:PROCflash(0):
   ENDPROC
    5260 LOCAL XX, YX, ZX, AX, BX, CX
    5270 CLS:PRINTFNdouble("Dump key") 'FNdo
   uble("sig ?"); CHR$10;
    5280 REPEAT: ks$=GET$
    5290 UNTIL ks$="Y" OR ks$="N"
    5300 IF ks$="Y" C%=0 ELSE C%=160
    5310 PROCflash(0):PROCcurs(S%,N%)
    5320 PROCnote(8%,N%,pi%,du%,0)
5330 CLS:PRINTFNdouble("Dumping.")
    5340 VDU 2,1,27,1,65,1,8,1,10
    5350 FOR XX=CX TO 960 STEP 32
5360 VDU 2,1,27,1,76,1,208,1,2
    5370 FOR Y%=0 TO 960 STEP 4
    5380 A%=0:FOR Z%=0 TO 7
    5390 IF POINT (XX+ZX*4, YX)=0 AX=AX+2^(7-
   Z%)
   5400 NEXT: VDU 1,A%,1,A%,1,A%
   5410 NEXT: VDU 1,10
5420 NEXT: VDU 1,27,1,64,3,7
    5430 PROCeurs (5%, N%): VDU 12,26
   5440 PROCnote(S%,N%,pi%,du%,0)
   5450 ENDPROC
   5460 :
   5470 DATA 134,131,134,130,133,130,132,1
  30,132,129,9,128
5480 DATA 156,159,155,159,155,158,155,1
  57,154,157,128,9
   5500 DATA 0,0,0,8,4,0,0,-4,-8,4,0,-4
   5510
   5520 DATA 5,13,21,25,33,41,49,53,61,69,
  73,81,89,97,101,109,117
5530 DATA 121,129,137,145,149,157,165,1
  69,177,185,193,197
   5550 DATA 135,130,270,98,238,138,278,11
  0,250,150,218
   5560 DATA 136,86,226,114,254,74,214,106
  ,246,66,206
   5570 :
   5580 DATA 4,1,5,2,6
   5590 DATA 7,3,6,2,5
```

```
Listing 1. Ample sample

"play" [] "setup" [] "riffA" [] "riffB"

[] "riffC" [] "riffD" [] "score1" []

"score2" [] "score3" [] "score4" []

"score5" [] "part2B" [] "part2C" []

"part2D" [] "part3B" [] "part3C" []

"part3D" [] "part4B" [] "part4C" []

"part4D" [] "part5B" [] "part5C" []

"part5D" [] "adlibsound" [] "ins3" []

"ins4" [] "wave1" [] "wave2" [] "wave3"

[] "wave4" [] "env1" [] "env2" []

"env3" [] "env4" [] "riffE" []

"solovoice" [] "barsrest" [] "riffF"

[] "ins2" [] "keyC" [] "keyFsharp" []

"keyA" [] "env6" [] "bass" []
```

```
Listing 2. Sunrise-Sunset listing
 10."play" [setup 0 VOICES 5 PLAYERS 1400
20.TEMPO 1PLAY(score1)PLAY
 30.2PLAY(score2)PLAY 3PLAY(score3)PLAY
40.4PLAY(score4)PLAY 5PLAY(score5)PLAY
 50.GO1
 RUN CLEAR
 10. "setup" [1WMOD wave1 2WMOD wave2
 20.3WMOD wave3 4WMOD wave4 13 WMOD WZERO
 30.WHG WGC 1EMOD env1 2EMOD env2 3 EMOD
 40.env3 4EMOD env4 6 EMOD env6]
 RUN CLEAR
  10. "wave1" [WZERO 128 1 WH! 125 2 WH!
 20.120 3 WH! 115 4 WH! 90 6 WH! 40 14
 30.WH! WHG WGC]
 RUN CLEAR
 10. "wave2" [WZERO 128 1 WH! 125 2 WH!
 20.120 6 WH! 100 10 WH! 40 15 WH! WHG
 30.WGC1
 RUN CLEAR
 10."wave3" [WZERD 128 1 WH! 125 3 WH! 20.100 5 WH! 90 7 WH! WHG WGC]
 RUN CLEAR
 10. "wave4" [WZERD 128 1 WH! 120 2 WH!
 20.110 4 WH! 100 6 WH! WHG WGC]
 RUN CLEAR
 10. "env1" [20 5 CYCLE]
 RUN CLEAR
 10. "env2" [ADSR 1 ATTACK 50 DECAY 120
 20. SUSTAIN 300 RELEASE]
 RUN CLEAR
 10. "env3" [ADSR 1 ATTACK 10 DECAY 115
 20. SUSTAIN 30 RELEASE
 RUN CLEAR
 10. "env4" [ADSR 5 ATTACK 300 DECAY 115
 20. SUSTAIN 500 RELEASE]
 RUN CLEAR
 10. "env6" [ADSR 1 ATTACK 100 DECAY 0
 20.SUSTAIN]
 RUN CLEAR
 10. "adlibsound" [2 CHANS SOUND ON CHAN
 20.128 AMP 4 WAVE 4 AENV 1 PENV -1 POS 1 30.CHAN ON INVERT 50 OFFSET 1 POS]
 RUN CLEAR
                                        Continued ▶
```

MUSIC

■ Ample listing 2 continued

10. "solovoice" [4 CHANS SOUND ON CHAN
20.128 AMP EVEN CHAN 1 WAVE 1 PENV 2
30.AENV ODD CHAN 2 WAVE 3 AENV 1 CHAN ON
40.RM 50 OFFSET 2 CHAN ON INVERT 5 FM
50.500 OFFSET 3 CHAN ON INVERT 250
60.OFFSET 4 CHAN 100 FMJ
RUN CLEAR

10."ins2" [2 CHANS SOUND ON CHAN 128 AMP 20.2 WAVE 2 AENV 1 CHAN 5 FM ON INVERT] RUN CLEAR

10."ins3" [2 CHANS SOUND ON CHAN 124 AMP 20.3 WAVE 2 AENV 1 CHAN ON RM 30 OFFSET] RUN CLEAR

10."ins4" [2 CHANS SOUND ON CHAN 128 AMP 20.4 WAVE 3 AENV 1 PENV 1 CHAN ON INVERT 30.300 OFFSET] RUN CLEAR

10."bass" [4 CHANS SOUND ON CHAN 128 AMP 20.0DD CHAN ON SYNC 4 PENV 4 AENV 1 CHAN 30.2 WAVE 1 PENV 2 AENV ON INVERT 3 CHAN 40.3 WAVE 3 AENV 500 OFFSET 2 CHAN 13 50.WAVE 4 CHAN 4 WAVE 4 AENV 1 PENV] RUN CLEAR

10."riffA" [-2:96,C72,-b24,C] 20.48,/-b72,D24,c] 30.72,-bC48,D]24,/72,-b48,C-b] RUN CLEAR

10."riffB" [0:12,-2POS gCDG 2POS ADAG
20.-2POS Agdc 2POS gAdc:32,0POS gDADGg:]
RUN CLEAR

10."riffC" [0:16,3POS gGA 2POS GAd 1POS 20.gAe OPOS cDa;24,-1POS DA72,D24,-2POS 30.G48,c;96,-3POS a48,ed;]
RUN CLEAR

10."riffD" [2:RAND? 200#/ #12 #2 10#+
20.DURATION RAND? 20#/ #12 #2
30.15#+,Ag+fe20,+FG48,+f0,^]
RUN CLEAR

10."riffE" [2:18,A16,g14,+f 20.12,e20,+c30,b210,+C0,^] RUN CLEAR

10."rifff" [0:12,-2POS cDE -1POS cDE 20.0POS cDE 1POS cDE 2POSAGAe:] RUN CLEAR

10."score1" [adlibsound 1700 DURATION 33 20.RAND! 6FOR(riffD)FOR 1000 DURATION 30.riffE 7800 DURATION 8FOR(riffD)FOR 40.0,^] RUN CLEAR

10."score2" [ins2 3barsrest
20.16FOR(riffF)FOR
30.12,+FeG+fBa+Cb16,+D+D+D24,+D+D!
40.12,+E+d+E//+d+E/+d/+E/+d//!@
50.solovoice O POS part2B 2FOR(part2C
60.part2B)FOR part2D @ ins2
70.10FOR(riffF)FOR 0,^ 6barsrest]
RUN CLEAR

10."score3" [ins3 7barsrest
20.4FOR(riffC)FOR 2POS
30.24,E+F^+C/+F//{12,+Cb+C//b+C/+f+c+f/Continued > Continued > Continu

■ Ample listing 2 continued

40.48,/| part3B 2FOR(part3C part3B)FOR 50.part3D 4FOR(riffC)FOR 0,^ 4barsrest]RUN CLEAR

10."score4" [ins4 4barsrest
20.7FOR(riffB)FOR -2POS
30.16,eGADGA^^^+fdc!24,bb^^b//b!
40.+g+g^+g+g+g+g! part4B 2FOR(part4C
50.part4B)FOR part4D 7FOR(riffB)FOR @1
60.CHAN 20 FM 2 CHAN 300 OFFSET 1
70.barsrest 192,gg48,d600,g0,^]
RUN CLEAR

10."score5" [bass -1POS 4FOR(riffA)FOR
20.1200 TEMPO 48,D^24,DD48,E: 1000 TEMPO
30.96,/24, dE48,/:950 TEMPO
40.24,/72,dE24,+F:48,/ 925 TEMPO / 850
50.TEMPO / 800 TEMPO /:24,+e+e 875 TEMPO
60.^+e+e 925 TEMPO +e^ 875 TEMPO +e: 800
70.TEMPO @1 POS ON CHAN 6 AENV part5B
80.2FOR(part5C part5B)FOR part5D 1300
90.TEMPO @ON CHAN 2 AENV -1POS
100.4FOR(riffA)FOR @1 CHAN -2POS 3 CHAN
110.2POS 768,CO,^]
RUN CLEAR

10."part2B" [keyFsharp 0:24,FF^cF^C/| 20.//F///| Bagfe/cG|144,/| 30.<24,ff^cF^C/|//96,>C|]
RUN CLEAR

10."part2C" [24,fGABcDGf;96,/e;keyA 20.24,cc^bC/a/;144,B24,fA;BB^aB/E/;144,c 30.48,^;24,cc^bC/a/;144,B24,fA; 40.BCEFCgfG;96,f^;] RUN CLEAR

10."part2D" [keyFsharp 24 20.fGABcDFG:192,/!keyC 48,Ba//:192,^!] RUN CLEAR

10."part3B" [keyFsharp 192 20.A:48,g/A:96,fG:B48,f:96,Af:144,e:] RUN CLEAR

10."part3C" [24,F72,dE24,E:32
20.FCbagf:keyA @ON CHAN 3AENV 24
30.eeeeeeee:GGGGAAAA:B=gB=g^=gB=g:
40.ee^eGG^G:eeeeeeee:GGGGfBfd:
50.+d+d^+d+d+d^+d:@ON CHAN 2 AENV 48
60.c//b:]
RUN CLEAR

10."part3D" [keyFsharp 96,d=E| keyC 6,E 20.15FOR(Fe)FOR F |6,F 15FOR(Gf)FOR G | 30.6,G 15FOR(Ag)FOR A | 0,^ 1 RUN CLEAR

10."part4B" [keyFsharp 48,cccc|E 20.24,c//F:48,ddcc:DDD:cA/A:ggg:] RUN CLEAR

10."part4C" [24,g/f/edc/!48,aB32 20.CDc!keyA 24,/cc^^cc^!^EE^^dd^! 30.^dd^^EE^!^EE^^Eb^!^CC^^CC^!^EE^^dd^! 40.FFF^BBB^!48,+a/+e+d!] RUN CLEAR

10."part4D" [keyFsharp 24,g/f/G//fikeyC 20.ebb^^bbb!^^aaa^^a!gg^^^gS6!0,^]
RUN CLEAR

Continued ▶

MUSIC

■ Ample listing 2 continued

```
10. "part5B" [keyFsharp
20.-2:24,ff^^^Cff!cc^^FF!BB^^^qCC!
30.gg^^BB!ff^^^Cff!cc^^GG!]
RUN CLEAR
10."part5C" [24,BB^BCC^g!fC/f6C/g!keyA
20.144,A24,^A!E//bD//a!=g////^e!
30. AE/aBE/b!a////^a!E//bD//a!BB^Bff^B!
40.fC/f+GCfB!]
RUN CLEAR
10."part5D" [keyFsharp 24,8B^BCC^g|keyC 20.900 TEMPO eee^ 1000 TEMPO ^eee!^ 1080 30.TEMPO ^ddd^^c! 1130 TEMPO cc^^c 1200
40. TEMPO cc:0, ^]
RUN CLEAR
10. "barsrest" [192 #*, ^]
RUN CLEAR
10. "keyC" [K()K]
RUN CLEAR
10. "keyFsharp" [K(+F+C+G+D+A+E)K]
RUN CLEAR
10. "keyA" [K(+F+C+G)K]
RUN CLEAR
```

See Doing It On The Side, page 96 Listing 1. Sideways printing

360 S%=ptr%(line) 370 B%=text?S%

380 IF B%=13 OR B%=0 THEN =32

Continued ▶

390 ptr%(line)=ptr%(line)+1

```
10 REM Sideways printing
20 REM By John Knight
30 REM For BBC B/B+/M/C
 40 REM (c) Acorn User April 1987
 50 :
 60 ON ERROR GOTO 220
 70 VDU 3: MODE 7
 80 PROConceonly
 90 :
100 REPEAT
110 line=0:ptr%(line)=0
120 REPEAT
130 PROCfindlines
140 PROCreadfile
150 UNTIL morelines=FALSE
160 PROCagain
170 UNTIL again$="N"
180 MODE 7
190 END
200 :
210 REM Error Handler
220 VDU 3,7:REPORT
230 IF ERR=17 THEN END
240 PRINT" in line " ERL
250 PRINT'' "Press any key to continue"
260 key=GET
270 RUN
280 END
290 :
300 DEF FNquery(q$)
310 PRINT q$;
320 INPUT""q$
330 =q$
340 :
350 DEF FNgetletter
```

```
■ Sideways printing listing 1 continued

    400 IF B%<32 GOTO 360
    410 activelines=activelines+1
    420 =B%
    430 :
    440 DEF FNgetbyte
    450 sub=sub+1
    460 =text?sub
    470
    480 DEF PROConceonly
    490 PROCsetlimits
    500 FOR A%=0 TO maxwidth
    510 ptr%(A%)=-1
    520 NEXT
    530 PROCmccode
    540 PRINTSPC(8); "ViewSheet Printer"
550 PRINTSPC(8); "=============
    560 VDU 28,0,24,39,6,12
    570 sub=0
    580 ENDPROC
    590 :
    600 DEF PROCfindlines
    610 IF NOT morelines PROCgetfile
    620 VDU 3,12
630 PRINT'"Please wait:"
    640 PRINT"Assembling line pointers.";
    650 PROCfinders
    660 morelines=FALSE
    670 IF sub<size THEN IF line>=pagelen
 morelines=TRUE
   680 IF line=-1 PRINT "File Empty": VDU
 7: FND
    690 ENDPROC
    700 :
    710 DEF PROCfinders
    720 REPEAT
   730 REPEAT UNTIL FNgetbyte=13 OR NOT (
 sub(size)
   740 PRINT".";
    750 IF sub>=size GOTO 770
    760 line=line+1 :ptr%(line)=sub+1
    770 UNTIL sub>=size OR line>=pagelen
    780 ENDPROC
    790 .
   800 DEF PROCreadfile
   810 L%=line
   820 VDU 12,2,1,27,1,ASC"@"
   830 VDU 1,27,1,ASC"A",1,8
   840 PRINT"Printing in progress.."
850 n1=maxdots MOD 256
   860 n2=maxdots DIV 256
   870 VDU 1,13,1,10
   880 REPEAT
   890 activelines = 0
   900 VDU 1,27,1,ASC"L",1,n1,1,n2
   910 FOR line = pagelen TO 0 STEP-1
   920 IF line>L% A%=32 ELSE A%=FNgetlett
   930 CALLyducode
   940 NEXT
   950 VDU 1,13,1,10
960 UNTIL activelines=0
   970 ENDPROC
   980 :
   990 DEF PROCsetlimits
  1000 DIM ostext 50, code 100
  1010 maxtextsize=&5000
  1020 DIM text maxtextsize+4
  1030 maxdots=960
  1040 maxwidth=(maxdots/10)-1
  1050 DIM ptr%(maxwidth)
  1060 morelines=FALSE
  1070 ENDPROC
  1080
  1090 DEF PROCagain
                                      Continued ▶
```

PRINTING

```
■ Sideways printing listing 1 continued

  1100 VDU 3,12 :
1110 PRINT"Print another Sheet";
   1120 REPEAT
   1130 again==CHR$( ASC(FNquery("(Y/N) ?"
  ) ) AND &DF)
  1140 UNTIL again$="Y" OR again$="N"
   1150 ENDPROC
   1170 DEF PROCgetfile
   1180 CLS
   1190 PRINT"Enter Filename or * Command:
   1200 VDU 28,0,24,39,7,12
   1210 REPEAT
   1220 file$=FNquery(">=")
   1230 oscomm=(LEFT$(file\$,1) = "*")
   1240 IF NOT oscomm PROCgetfilesize ELSE
   size=0 :PROCoscli(file$)
   1250 UNTIL (NOToscomm) AND (size) 0)
   1260 IF size> maxtextsize PRINT"Too big - for now...":END
   1270 PROCoscli("LOAD "+file$+" "+STR$~
  (text) )
   1280 text!size = 0
   1290 PRINT "Double or Single height ";
   1300 REPEAT
   1310 doubles=CHRs( ASC(FNquery("(D/S) ?
  ") ) AND &DF)
   1320 UNTIL double$="D" OR double$="S"
   1330 IF double = "D" ?double=1 ELSE ?dou
  ble=0
   1340 IF double$="D" dots=20 ELSE dots=1
  0
   1350 pagelen=(maxdots/dots)-1
   1360 sub=-1 :VDU 28,0,24,39,6
   1370 ENDPROC
   1380 :
   1390 DEFPROCgetfilesize
   1400 size=EXT#(OPENIN(file$)):CLOSE #0
   1410 IF size<1 PRINT "No such data!"'
   1420 ENDPROC
   1430 :
   1440 DEF PROCoscli(star$)
   1450 $ostext=star$
   1460 X%=ostext MOD 256
   1470 Y%=ostext DIV 256
   1480 CALL&FFF7
   1490 ENDPROC
   1500 :
   1510 DEF PROCoccode
   1520 osword=&FFF1:oswrch=&FFEE
   1530 FOR pass=0 TO 2 STEP 2
   1540 P%=code
   1550 COPT pass
   1560 .double
   1570 NOP
   1580 .block
   1590 NOP: NOP: NOP
   1600 NOP: NOP: NOP
   1610 NOP: NOP: NOP
   1620 \
   1630 .vducode
   1640 STA block
   1650 LDA #10
   1660 LDX #block MOD 256
   1670 LDY #block DIV 256
   1680 JSR osword
   1690 LDX #8
   1700 \
1710 .vdu1loop
   1720 LDA #1
                     :JSR oswrch
   1730 LDA block, X : JSR oswrch
   1740 LDA double :BEQ nextline Continued ▶
```

```
■ Sideways printing listing 1 continued

  1750 LDA #1
                     :JSR oswrch
  1760 LDA block, X : JSR oswrch
  1770 .nextline
  1780 DEX
                     :BNE vdulloop
  1790 LDA double :BEQ normspc
  1800 LDA #1
                     :JSR oswrch
  1810 LDA #0
                     :JSR oswrch
  1820 LDA #1
                     :JSR oswrch
  1830 LDA #0
                     :JSR oswrch
  1840 .normspc
  1850 LDA #1
                     :JSR oswrch
  1860 LDA #0
                     :JSR oswrch
  1870 LDA #1
                     :JSR oswrch
  1880 LDA #0
                     :JSR oswrch
  1890 RTS
  1900 ]
  1910 NEXT
  1920 ENDPROC
```

See Presenting Pointer Picture, page 104

```
Listing 1. Picking coloured boxes
     10 REM Pointer Listing 1
     20 REM by Dave Atherton
     30 REM Compact only
     40 REM (c) Acorn User April 1987
     50
     60 ON ERROR GOTO 380
     70 MODE 129
     80 VDU 23,11
     90 *KEYS 0
    100 *POINTER O
    110 PROCsetup
    120 PRINTTAB(4,30) "Move cursor keys th
 en press COPY"
    130 *KEYS
    140 *POINTER
    150 *FX22
    160 REPEAT
    170 X%=ADVAL 7
    180 Y%=ADVAL 8
    190 UNTIL (ADVAL(O)AND1) DR INKEY-106
    200 *FX15
    210 p=POINT(X%-4,Y%+8)
    220 PRINTTAB (4, 30) "
                            You picked colo
  ur ";p;SPC 9;
    230 GOTO 160
    240 :
    250 DEFPROCsetup
    260 VDU 24,0;200;1279;1023;
    270 FOR i=1 TO 15
    280 PROCbox(i)
    290 NEXT
    300 ENDPROC
    310 :
    320 DEFPROCHOX (x)
    330 GCOLO, x
    340 MDVE RND(1280),RND(1024)
350 PLOT 101,RND(1280),RND(1024)
    360 ENDPROC
    370 :
    380 *FX23
    390 *POINTER 0
    400 *KEYS 0
    410 *FX4
    420 VDU23,1,1!
    430 PRINTTAB(0,31);
    440 END
```

YELLOW PAGES COMPACT

```
Listing 2. Selecting an item from a menu
      10 REM Pointer-Listing 2
      20 REM by Dave Atherton
      30 REM Compact only
       40 REM (c) Acorn User April 87
      50 :
      60 ON ERROR GOTO 390
      70 MDDE129
      80 VDU19,1,6:23,1:
      90 *KEYS 0
      100 *PDINTER O
      110 PROCsetup
     120 VDU31,2,28,136
130 PRINT" Pointer"
      140 *KEYS
      150 *POINTER
      160 *FX22
      170 REPEAT
      180 X%=ADVAL 7
      190 Y%=ADVAL B
     200 PRINTTAB(0,28); (13-Y% DIV 64)" "
     210 UNTIL (ADVAL(0)AND1) OR INKEY-106
     220 *FX15
     230 P%=(13-Y% DIV 64)
     240 PRINTTAB(8,30) "You picked menu ite
     "; P%
     250 GOTO170
     260 :
     270 DEFPROCsetup
     280 READ title$
     290 PRINTTAB((40-LEN title$)/2,2) tit1
   e$
     300 READ N
     310 PRINTTAB(0,6);
     320 FOR I=1 TO N
     330 READ I$
     340 PRINTI;", ";1$
     350 PRINT
     360 NEXT
     370 ENDPROC
     380 :
     390 *FX23
     400 *FX4
     410 *POINTER O
     420 *KEYS 0
     430 VDU23,1,1;
440 PRINTTAB(0,30);
     450 IF ERR<>17 THEN REPORT: PRINT" at "
   ; ERI
     460 END
     470 :
     480 DATA Program Menu, 5
     490 DATA Program One, Program Two
     500 DATA Program Three, Program Four
     510 DATA Program Five
```

```
Listing 3. Animated sprites
      10 REM Compact Listing 3
      20 REM by Dave Atherton
      30 REM Compact or B/B+ with GXR
      40 REM (c) Acorn User April 1987
      50 :
      60 MODE 128
      70 *SPRITE
      80 GCOL3,1
      90 *FX4 1
     100 X%=640: Y%=512
     110 *SCHOOSE 1
     120 REPEAT
     130 PLOT&ED, X%, Y%
     140 A%=GET AND &7F
     150 PLOT&ED, X%, Y%
     160 IFA%=8 THEN X%=X%-16
     170 IFA%=9 THEN X%=X%+16
                                      Continued ▶
```

```
■ Pointer listing 3 continued
```

180 IFA%=10 THEN Y%=Y%-4 190 IFA%=11 THEN Y%=Y%+4 200 UNTIL FALSE 210 END

See First Byte, page 49

```
Listing 1. Memory ROM creator
       10 REM Memory ROM Creator
      20 REM by Tessie Revivis
      30 REM for Master and Compact
       40 REM (C) Acorn User April 1987
      50 :
      60 MDDE 7
      70 PROCassemble
      80 PRINT"Writing ROM image.."
90 *SRWRITE 5000 5105 8000 6
     100 PRINT"Press CTRL-BREAK"
     110 END
     120 :
130 DEF PROCassemble
     140 PRINT"Assembling Data..."
     150 c%=0:base=&5000
     160 FOR loop=0 TO &105
     170 READ byte
     180 c%=c%+byte
     190 base?loop=byte
     200 NEXT
     210 IF c%=31709 THEN ENDPROC
     220 VDU 7
     230 PRINT"Error in Data - re-check"
     240 END
     250 :
     260 DATA 0,0,0,76,33,128,130,25
270 DATA 1,77,101,109,111,114,121,32
     280 DATA 82,79,77,32,49,46,48,48
     290 DATA 0,0,40,67,41,32,88,88
     300 DATA 0,201,4,240,1,96,72,90
     310 DATA 218, 136, 162, 255, 200, 232, 177, 2
     320 DATA 41,223,221,254,128,240,245,18
     330 DATA 254,128,201,255,240,3,76,250
     340 DATA 128,162,255,232,189,218,128,2
  40
     350 DATA 5,32,238,255,208,245,165,1
     360 DATA 56,229,24,133,129,165,0,233
370 DATA 0,133,128,32,157,128,32,135
380 DATA 128,162,255,232,189,235,128,2
    390 DATA 5,32,238,255,208,245,56,165
400 DATA 6,229,0,133,128,165,7,229
410 DATA 1,133,129,32,157,128,32,135
     420 DATA 128,250,122,104,169,0,96,162
430 DATA 255,232,189,149,128,240,5,32
     440 DATA 227, 255, 208, 245, 96, 32, 98, 121
     450 DATA 116,101,115,13,0,162,4,169
460 DATA 0,149,112,56,165,128,253,208
     470 DATA 128, 168, 165, 129, 253, 213, 128, 1
     480 DATA 8,133,129,132,128,246,112,208
     490 DATA 235, 202, 16, 227, 162, 5, 202, 240
    500 DATA 4,181,112,240,249,181,112,9
510 DATA 48,32,238,255,202,16,246,96
520 DATA 1,10,100,232,16,0,0,0
530 DATA 3,39,80,114,111,103,114,97
    540 DATA 109,32,108,101,110,103,116,10
    550 DATA 58,32,0,77,101,109,111,114
560 DATA 121,32,102,114,101,101,32,58
570 DATA 32,0,250,122,104,96,77,69
```

580 DATA 77,79,82,89,255,102,102,0

Continued ▶

YELLOW PAGES FIRST BYTE

First Byte listing 2

```
10 REM *SRDATA demo
 20 REM Tessie Revivis
 30 REM for B+128/Master/Compact
 40 REM (C) Acorn User April 1987
 50 :
 60 *SRDATA W
 70 *SRDATA X
 80 *SRDATA Y
 90 *SRDATA Z
100 offset=0
110 FOR loop=1 TO 4
120 GCOL 0,1
130 MODE 4
140 READ a,b,c,d,e,f
150 MOVE a, b
160 MDVE c,d
170 PLOT 85,e,f
180 A$="SRWRITE 5000 8000 "
190 B$=STR$~(offset)
200 DSCLI (A$+B$)
210 offset=offset+&3000
220 NEXT
230 key=GET
240 MODE 4
250 :
260 REPEAT
270 offset=0
280 A$="SRREAD 5000 8000 "
290 FOR loop=1 TO 4
300 B$=STR$~(offset)
310 OSCLI (A$+B$)
320 offset=offset+&3000
330 NEXT
340 UNTILO
350 :
360 *SRREAD 3000 3000 0
370 *SRREAD 3000 3000 3000
380 *SRREAD 3000 3000 6000
390 *SRREAD 3000 3000 9000
400 UNTILO
410 :
420 DATA 0,0,1000,0,500,500
430 DATA 1000,0,500,500,1000,1000
440 DATA 500,500,1000,1000,0,1000
450 DATA 0,1000,500,500,0,0
```

See Hints & Tips, page 41

Listing 1. Displays 256 bytes of memory

```
10 REM Hints & Tips - Listing 1
   20 REM By Martin Phillips
   30 REM For BBC B/B+/M/E/C
   40 REM (c) Acorn User April 1987
   50 :
   60 @%=3
   70 VDU 14
   80 a$=" "
   90 b$=" "
  100 INPUT "Start at page &" start$
110 page=EVAL("&" + start$)
  120 FOR location=page TO page+&FF STEP
  130 PRINT "%"; ~location; a$;
  140 B$=b$
  150 FOR line=0 TO 7
  160 contents=location?line
  170 PRINT ~contents;
180 IF contents<32 OR contents>126 THE
N contents=46
                                      Continued ▶
```

■ Hints & Tips listing 1 continued

```
190 B$=B$ + CHR$(contents)
200 NEXT line
210 PRINT B$
220 NEXT location
```

Listing 2. Strips control codes from wordprocessor files

```
10 REM Hints & Tips - Listing 2
   20 REM By Martin Phillips
   30 REM FOR B/B+/M/E/C
   40 REM (c) Acorn User April 1986
   50 :
   40 CLS
   70 INPUT "Start point = &"S$
80 INPUT "File length = &"L$
   90 S%=EVAL ("&"+S$)
  100 E%=S%+EVAL ("&"+L$)
  110 FOR N%=S% TO E%
  120 IF ?N%<32 OR ?N%>126 THEN ?N%=32
  130 NEXT N%
  140 REPEAT
  150 S%=S%+1
  160 PRINT TAB(5,5); "At point &"; ~S%;
  170 IF ?S%=32 AND (S%?-1)=32 PROCshuff
10
  180 UNTIL S%>=E%
  190 PRINT TAB(0,10)"Finished"
200 PRINT "New file length is &"; ~(E%
-(EVAL("&"+S$)))
  210 END
  220
  230 DEF PROCshuffle
  240 5%=0
  250 REPEAT
  260 s%=s%+1
  270 UNTIL S%?s%<>32 OR s%+S%>=E%
  280 FOR N%=S% TO E%
  290 ?N%=N%?s%
  300 NEXT N%
  310 E%=E%-5%
  320 ENDPROC
```

Listing 3. Tree game listing

```
10 REM Hints & Tips - Listing 3
 20 REM By Martin Phillips
30 REM For BBC B/B+/M/C
40 REM (c) Acorn User April 1987
 50 :
 60 MODE 7
 70 PROCinit
 80 PROCLOAD
 90 PROCrun
100 PROCsave
110 END
120 :
130 DEF PROCinit
140 S%=&3000:E%=S%+4:a%=40
150 b%=44:c%=48:os%=&A00
160 $E%="Has it four legs"
170 E%!a%=E%+c%:E%!b%=E%+2*c%:E%=E%+c%
180 $E%="A dog"
190 E%!a%=0:E%!b%=0:E%=E%+c%
200 $E%="A sparrow"
210 E%!a%=0:E%!b%=0:E%=E%+c%
220 ENDPROC
230 :
240 DEF PROCrun
250 P%=5%+4
```

Continued ▶

YELLOW PAGES HINTS & TIPS

◀ Hints & Tips listing 3 continued 260 VDU 26,12 270 PRINT CHR\$141; SPC(12); "The Tree Game" 280 PRINT CHR\$141; SPC(12); "The Tree Game" 290 VDU 28,0,24,39,4 300 PRINT "Are you thinking of an anim 310 PROCinput 320 IF A\$="N" THEN ENDPROC 330 IF P%!a%=0 THEN PRINT "Is it "; 340 PRINT \$P%; " "; 350 PROCinput 360 IF A\$="Y" AND P%!a%=0 PRINT "I win !": I=INKEY(500):GDTD 250 370 IF A\$="N" AND P%!b%=0 PROCgetquest ion: GOTO 250 380 IF A\$="Y" AND P%!a%>0 P%=P%!a%:GOT 0 330 390 IF A\$="N" AND P%!b%>0 P%=P%!b%:GOT 330 400 ENDPROC 410 : 420 DEF PROCinput 430 REPEAT 440 A\$=GET\$ 450 UNTIL A\$="Y" OR A\$="N" 460 IF A\$="Y" THEN PRINT "Yes" ELSE P RINT "No" 470 ENDPROC 480 : 490 DEF PROCgetquestion 500 PRINT "What were you thinking of?" 510 INPUT object\$ 520 IF LEN(object\$)>39 THEN PRINT "Tex t too long": VDU 7:GOTO 500 530 PRINT "Tell me a question that wil distinguishbetween "\$P%" and "object\$ 540 INPUT question\$ 550 IF LEN(question\$)>39 THEN PRINT "T ext too long":VDU 7:GOTO 530 560 PRINT "What would the answer be fo r" '\$P% 570 PROCinput 580 \$E%=\$P%: \$P%=question\$ 590 E%!a%=0:E%!b%=0:E%=E%+c% 600 \$E%=object\$:E%!a%=0 610 EX!b%=0: E%=E%+c% 620 IF A\$="Y" P%!a%=E%-2*c%:P%!b%=E%-c %: ENDPROC 630 P%!a%=E%-c%:P%!b%=E%-2*c% 640 ENDPROC 650 : 660 DEF PROCload 670 CLS 680 PRINT' "Have you a tree to load? "; 690 PROCinput 700 IF A\$="N" THEN ENDPROC 710 *LOAD TREE 720 F%= 15% 730 ENDPROC 740 750 DEF PROCsave 760 !S%=E% 770 PROCoscli ("SAVE TREE "+STR\$~S%+" " +STR\$~E%) 780 ENDPROC 790 800 DEF PROCoscli(\$os%) 810 X%=os% MOD 256:Y%=os% DIV 256 820 CALL &FFF7

```
Listing 4. Tree Game editor
     10 REM Hints & Tips - Listing 4
     20 REM By Martin Phillips
     30 REM For BBC B/B+/M/C
     40 REM (c) Acorn User April 1987
     50 :
     60 MODE 7
     70 os%=&A00
     80 PROCload
     90 PROCedit
    100 PROCsave
    110 END
    120 :
    130 DEF PROCedit
    140 VDU 26,12
    150 PRINT CHR$141; SPC(10); "The Tree
  Game Editor"
    160 PRINT CHR$141; SPC(10); "The Tree
  Game Editor"
    170 PRINT' "Enter new text or press RET
  URN"
    180 VDU 28,0,24,39,5
    190 5%=&3000
    200 FOR N%=S%+4 TO E%-1 STEP 48
    210 PRINT " "$N%
    220 INPUT temp$
    230 IF LEN(temp$)>39 PRINT"Text too lo
 ng": VDU7: GOTO 210
    240 IF temp$>"" $N%=temp$
    250 NEXT N%
    260 ENDPROC
    270 :
    280 DEF PROCLoad
    290 *LOAD TREE
    300 E%=!S%
    310 ENDPROC
    320 :
    330 DEF PROCsave
    340 !S%=E%
    350 PROCoscli("SAVE TREE "+STR$~S%+" "
  +STR$~E%)
    360 ENDPROC
    370 :
    380 DEF PROCoscli($os%)
    390 X%=os% MOD256:Y%=os% DIV256
    400 CALL &FFF7
    410 ENDPROC
```

Listing 5. Removes embedded commands

```
115 PROCwordwise
330:
340 DEF PROCwordwise
350 PRINT "Removing embedded commands"
360 FOR NZ=5% TO E%
370 IF ?N%<>2 THEN GOTO 410
380 REPEAT
390 ?N%=32:N%=N%+1
400 UNTIL ?N%=7
410 NEXT N%
420 ENDPROC
```

April listings

The easiest way to enter the listings is to buy the monthly listings' disc or cassette. It saves time and avoids errors. The disc is fully menu driven and an excellent buy at only

£5.95. The cassette version costs £3.95.

Order form on page 136.

830 ENDPROC



ombuters



ACORN SPECIALIST COMPUTER CENTRE All our prices include VAT.





APPOINTED WATFORD DEALER

Microman has been appointed a Watford Dealer. We are stocking a large range of Watford products, including the popular BEEB DIGITIZER, MAGAZINE MAKER, 32K SHADOW RAM CARD, RAM/ROM CARDS, DFS UPGRADES and many more available from our shop.

and M. Corp. applies	
BBC MASTER SERIES	475.00
Master 128	125.00
Master Turbo Module Master 512 Upgrade	228.85
BBC MASTER COMPACT SERIES	220.00
Master Compact + TV Modulator	458.85
Master Compact + TV Modulator Master Compact + Green Monitor	539.35
Master Compact + Colour Monitor	688.85
Compact Viewsheet Compact Viewstore Selection of Games	59.80
Compact Viewstore	59.80
Selection of Games	Call for prices
ACORN PERIPHERALS	STATE OF THE PERSON
800K Dual Disc Drive + Stand	316.00
Prestel Receiver	139.00
IEEE Interface	
BBC B DISC INTERFACES	
Acorn 1770 Disc Interface	
Acorn ADFS ROM	29.99
Watford Single Density DFS	66.70
RAM/ROM SHADOW EXPANSION	24.00
Watford Solderless Rom Board Aries B12 Sideways ROM Board	
Watford Shadow Board	
Aries B32 RAM Extension Board	92.00
	43.70
EPROM PROGRAMMERS/ERASERS	
Control Telemetry Eprom Prog.	109.25
Uviprom EPROM Prog.	20.95
Uviprom EPROM Prog. + ZIF	25.95
Multi-Prom Programmers Uviprom ROM Software	44.95
Uviprom ROM Sottware	5.00
Uviprom SWR Disc Software	2.00
Using EDDOM Errors	20.05
Please not Uviprom programmers software extra. Uvipac EPROM Eraser Uvipac EPROM Eraser + Timer	25.95
EPROMS/RAM	20,70
Eproms 2764 8K	2.95
Enrome 27128 16K	3.45
27128 per 5 Eproms RAM 6264LP-15 8K	16.50
RAM 6264LP-15 8K	3.95
27256 (12.5v)	5.95
27512 (12.5v)	9.95
MONITORS (inc BBC CABLE)	***
Microvitec 1431 Std/Metal Microvitec 1451 Med/Metal	229.00
Microvitec 1451 Med/Metal Philips CMB8533 Med/RGB/CV	299.00
Philips Green 7502	85.00
Philips Amber 7522	89.00
Philips White 7542	
MODEMS/COMMUNICATIONS	
Pace Nightingale + Commstar II	99.00
PRINTERS (includes free BBC lead)	
Canon PW1080A	289.00
Panasonic KX-P1080	179.00
Star NL10 + BBC/Cent Interface	278.00
Star NL10 Sheetfeeder Juki 6100 Daisywheel	63.25

PLOTTERS Roland DXY-880A A3 Plotter	835.00
Roland DXY-980A A3 Plotter	1207.50
Epson H180 Plotter (4 pen)	458.85
Hitachi A3 Plotter (4 pen)	595.00
Microman Plotter ROM	29.95

LOW COST A4 PLOTTER PACKAGE

9L/80 A4 Four Pen Plotter (DXY type commands), 0.2mm resolution plus FREE MICROMAN PLOTTER ROM (produces plots from view-plot, interchart etc). Plus Beeb Cable, all for

£	7	8	9	O	0	

DIGITISERS Graphpad II	75,50
Cherry Digitiser	632.50
BBC CAD SYSTEMS	A STATE OF THE PARTY OF THE PAR
Bitstik 1	375.00
Bitstik Multi-plotter Driver	79.00
Bitstik 2 (Master compatible)	799.00
Bitstik 2 Upgrade	460.00
Pineapple Diagram (40T Disc)	28.75
Pineapple Diagram (680T Disc)	28.75
Pineapple PCB Designer	
Novacad Trackerball Compatible	113.85
Novacad Plotter Utilities	32.78
MOUSE/TRACKERBALL PRODUCTS	
AMX CAD	69.9
AMX Xtra Xtra	24.95
AMX Mouse + Free Watford Art	79.9
AMX Mouse: Maseter Version	79.9
AMX Pagemaker	49.9

OPUS DISC DRIVES

OPUS 5802 400K 40/80T/DS £109.95

OPUS 5802D 800K 40/80T/DS £209.95
OPUS 5802D 800K 40/80T/DS including PSU

£239.95

AMX Pagemaker: Master Version	49.95
AMX Max	
AMY Super Art POM	49.95
AMX Super Art ROM: Master Version	49.95
Fleet Street Editor	39.95
Fleet Street Editor Utilities	14.95
Trackerball RB2 + ICON Soft	69.95
Trackerball + Pointer (Master)	69.95
Pointer ROM	14.37
Pointer ROM Trackerball/Mouse Interface	9.20
VIDEO DIGITISERS	
Watford BBE Video Dititiser	126.50
Watford Magazine Maker	148.35
WORD PROCESSORS + UTILITIES	
View 2.1 ROM	52.00
View 3.0 ROM	
Viewspell ROM	39.95
Interword ROM	49.00
Wordwise Plus ROM	49.00
Watford Word-Aid	
FONT/NLQ UTILITIES	
Watford NLQ ROM for Epson	
Clares Fontwise (Disc)	12.00
Clares Fontwise Plus (Disc)	
Clares Fonteditor (Disc)	
Fontaid ROM	
Fontaid Utilities Disc A	15.00

PANASONIC KX-	P1080
Acorn LOGO ROM	
ISO Pascal Stand Alone Generator	
ISO Pascal ROM	59.95
BCPL Stad Alone Generator	
BCPL Calculations	34.50
BCPL Rom	
Interchart ROM	33.95
Intersheet ROM	
Viewplot ROM	29.95
Viewsheet ROM	52.00
SPREADSHEETS/CHARTS	25.00
Betabase	
Acorn Database (Disc) Masterfile II (Disc)	
Viewstore ROM	
DATABASES + UTILITIES	
Multi-Font NLQ	30.00
Fontaid Utilities Disc B	

PRINTER

This well-built printer offers many advanced features. It provides both friction and tractor feat NLQ as wel as draft modes and full Epson code compatibility. This special offer includes a BBC Cable.

Logotron LOGO ROM	69.00
Micro-Prolog ROM	79.95
UTILITIES	CALL STREET
Acorn Basic Editor ROM	29.90
Acorn Termulator ROM	34.5
Acorn Graphics Ext. ROM	
Computer Concepts	Full range
Beebug	_ Full range
Caretaker Basic Utility ROM System ADE + BBC And BBC+	33.35
System ADE + BBC And BBC+	52.90
System ADE + Master	56.35
Slave Plus ROM	39.9
Floppywise Plus ROM	29.9
Proc-Kit (Disc)	10.9
Loc-Kit (Disc)	25.00
Vinc Replay ROM's	35.00
Vine TD ROM	18.00
Clares Profile Disc	12.00
Clares BROM Plus (Disc)	30.00
Clares Ramrod ROM	40.00
Watford The Investigator	
Watford Dumpout 3 ROM	28.75
CJE Inform	20.0
Moviemaker ROM	29.90
SupergraphPineapple Compiler	28.75
VIGLEN PRODUCTS	
Viglen Console	
Viglen Printer Stand	19.95
Viglen Consoles, cartridge systems and printer stand	P.O.A

PC SHOWROOM

With the launch of the Amstrad PC1512 and Opus PC II, we are opening a new showroom for the sales of PC compatible computers, add-on card, hard discs, printers and software. The showroom is adjacent to our existing shop and we welcome our existing and new customers to visit us and have an opportunity to see and use this new range of machines and software.

We will be stocking the range of Amstrad PC1512, Opus PC II and Tandon computers along with software titles such as VP Planner, VP Info, Executive Writer, Supercalc 3, Wordstar 1512, Word Junior and many more applications.

Opening times for the showroom will be 9-5 Mon.-Fri. and 9-12 Sat. Our shop times remain unchanged.

MAIL ORDER SALES



PHONE Access 074488 5295

MESA

We accept both Access and Visa credit cards. Simply telephone your order, giving card number, expiry date, name and address, or send your order with cheque or postal order to the address opposite.

Carriage/Postage Charges: Computers/Printers/Disc Drives: Next day delivery, £8.00; Royal Mail Trackback, £4.00; ROM/Exp. Boards/Software: First class post,


Our Mail Order Dept. will despatch your order within 24 hours (subject to availability).

ALL PRICES INCLUDE VAT Government and Educational Orders accepted.

SHOP

SHOP OPENING 9-6 MONDAY TO SATURDAY

Unit 1A **Rainford Industrial Estate** Mill Lane, Rainford, St Helens, Merseyside, WA11 8LS Phone 074488 5242/3667



ROMS

ACORN USER OFFERS

User Dump – Acorn User's printer control ROM – £19.95



Dump graphics screens with User Dump

User Dump includes a ROM chip which plugs into any free sideways ROM socket on your BBC micro, and an easy-to-follow manual. With the User Dump ROM installed you'll have access to a wide range of commands to help you control your printer's facilities – all for just £19.95.

You will be able to dump any screen image in any display mode by entering a single command – either as a line of your program or alternatively by typing in


direct from the keyboard. *User Dump* will also give a perfect dump while a machine code program is running.

This versatile ROM will work with all the popular dot-matrix printers, including all those with single and double density bit-image graphics.

Send an A4 SAE to Seran at Redwood Publishing, 141-143 Drury Lane, London WC2B 5TF, for more details.

Order form on page 136.

User ROM – Acorn User on a chip only £19.95



Dot fill routine from UserROM

The Acorn User UserROM brings the best of Acorn User into your micro. Put together by our technical editor, Bruce Smith, this 8k ROM chip is packed with your favourite Acorn User routines. Simply plug the ROM chip into a sideways ROM socket and all the routines are instantly accessible via easy-to-use *commands – what could be simpler?

Routines include the popular colour fill and dot fill routines, bad program recov-

ery, variable lister, function key lister, a graphics compiler, a circle drawing routine, sound compiler, plus lots, lots more!

Included with *UserROM* is a 22-page manual which explains how to get the most from your *UserROM*, and you'll find many demonstration programs showing how to use the new commands.

Full details available by sending an A4 SAE to Seran, Redwood Publishing, 141-143 Drury Lane, London WC2B 5TF.

Acorn User Assembler Extension ROM just £19.95!

Assembler Extension ROM (AXR) 1.10
BITS (Use *BITS for help on OPT)
ASSM (Sro) (OPT 1) ((OPT 2)) ((dest))
DSM ((address)) ((ROM))
LURR
STRIP (fsp) ((:))
FX 104,0,0 to disable
Condition: On

AXR for machine code programmers

The AXR ROM is aimed at the machine code programmer. It adds a variety of assembly options and commands to the Basic assembler, including:

- New options controlled via OPT
- Assemble from disc or memory
- Assemble to disc or memory
- Branch to jump
- Enhanced error checking and reporting
 The AXR also adds several new pseudo op codes to the assembler these are: ORG -

sets assembly origin, DST – specify destination, DFR – define real numbers, DFX – define byte, word, double word, SWR – send assembly to sideways RAM.

The AXR also allows full Basic expression evaluation, the use of binary numbers (eg, %01100110). A disassembler is included, and all the 65CO2 instructions can be used (including BBR,SWB etc.). The ROM is compatible with both Basic 1, 2, and Master.

Order form on page 136 - 24 hour telephone service (0672) 40825

PROGRAM LISTINGS

ACORN USER OFFERS

Monster monthly listings on cassette and disc



Phil Wilkes' monster, this month's bonus

This month you too can join the ranks of the famous using David Lawrence's excellent, easy-to-use program music Editor. With it, you'll be able to compose and play your own masterpieces, and experiment with those written by your favourite artists. Plus there's a musical special by Bob Cornford-Wood.


Meanwhile David Atherton shows you how to use trackerballs, mice and joysticks with the Master Compact, in your own

programs. John Knight helps out all *View-Sheet* users with a guide to printing spread sheets sideways on your printer.

All the programs in this issue are on cassette for the BBC and Electron and 5.25in disc. This month we have included a Monster graphics bonus, so don't miss out, send off for your disc or cassette now using the order form on page 135.

In exceptional circumstances please note we reserve the right to alter the contents.

Monthly program subscriptions on disc and cassette



Quadline on the free Games Compendium


Save yourself the trouble of ordering your disc or cassette listings each month and take out a subscription. We'll send you our great *Games Compendium* cassette when you apply for a cassette subscription – worth £3.95, or you may prefer to try us out for six months, which will cost you £20, a saving of over £3. These offers are only open to UK subscribers, not overseas.

New *Acorn User* monthly disc subscribers (in the UK) are entitled to receive one of our

smart grey cloth disc binders in its own sturdy slip case – normally priced at £9.95. So you'll be able to keep your monthly discs in safety. If you prefer, you may subscribe at the six month discounted price of £30 – a saving of over £5.

Whichever you choose, you won't regret investing in our monthly listings, they'll provide you with useful utilities, graphic abilities, entertainment and much more throughout the year.

Vastly reduced disc binders £6.95



The Acorn User magazine and disc binders

This unbeatable offer must end soon! Save yourself £3 and buy the *Acorn User* disc binder now. The best way to care for your monthly discs.

The binder is made of superb quality grey cloth and comes with its own highly protective slip case. The binder has a huge capacity of 30mm, so it will comfortably hold all your monthly discs for a year. Our disc binder is already filled with six trans parent inserts, which hold two 5.25in discs.

An Acorn User magazine binder is the one and only way to keep your precious copies of Acorn User magazine in pristine condition. For only £4.95 your magazines can last a lifetime.

Our smart red magazine binder features a wide spine with the capacity to hold 12 full issues of *Acorn User* which are held in palce by metal strips.

Send in your orders now, by using the order form on page 136.

Order form on page 135 & 136 - 24 hour telephone service (0672) 40825

DISCS

A C O R N U S E R O F F E R S

Disc problems? The Disc Help Disc will sort them out for £6.95



The Disc Help Disc's menu page

Have you just bought a disc interface or disc drive but the jargon has left you perplexed and puzzled?

Do you simply want to know all about discs and how to use your disc filing system ROM to its full potential?

Acorn User has the answer with the Disc Help Disc. It contains all you need to know about discs on a disc. Simply insert it into your disc drive and all the information you will ever need will be at your fingertips. Everything you ever wanted to know about file maintenance is covered, and help is given on the transfer of Basic programs from cassette to disc.

A simulated disc filing system helps you practice using commands. You can even test your progress with the question and answer tutorial at the end of each section.

The disc is available in 80-track format only. Sort out your problems now using the order form on page 136.

Make learning easy with our Education Disc—at £7.95



The Education Disc menu page

The Education Disc contains programs drawn from Acorn User magazine.

Eco-Fax is a sophisticated viewdata-type database for use on Econet systems, and comes with its own versatile frame editor. There is a colourful version of Turtle Logo; a program which shows equations as graphs; and a music writing program which allows you to edit tunes.

Graphics are a strong feature of the collection, including the Easyplot drawing

software, supported by two other programs which use *Easyplot* screens as an electronic noticeboard or in place of an overhead projector. A bulletin board displays messages in scrolling characters.

There are routines to use in your own Basic programs – screen dumps, a machine code utility and graphics plotting and drawing commands in mode 7. The disc is available in 40 track format only, but can be copied to an 80 track disc.

Trouble free networking with our Utilities Disc only £19.95



Bring teletext information to networks

The Acorn User Network Utility Disc is the logical addition to your network, combining a wide range of invaluable routines with a sophisticated, yet easy-to-use teletext information system. The disc features:

- NetFax our hybrid information system, provides thousands of pages of information which may be read without affecting any text or program in memory. It features an advanced teletext editor.
- Utilities for all network users, including

- a file locator and directory size finder.
- Utilities for network managers, including a bridge-compatible screen viewer and an efficient 'notify-all' facility.
- An auto-installer to transfer all of our utilities to your net painlessly.
- 150 NetFax pages, including instructions, help pages and sample indexes.

The Acorn User Utility Disc is in 80-track format and costs just £19.95.


See page 136 for your order form.

Order form on page 136-24 hour telephone service (0672) 40825

DISCS

ACORN USER OFFERS

Graphics Utilities Disc a bargain at £7.95



The Graphics Utilities Disc makes life easy

The Acorn User Graphics Utilities Disc contains four sections.


Sixteen machine code routines enable you to manipulate blocks of graphics. Rotation and reflection utilities are included, together with a screen compressor/expander, a colour flood-fill routine and three screen-mode conversion commands.

The Basic procedure library includes routines to produce multi-height, proportional and justified text as well as a

procedure for 'drop-shadow' boxes. All of the procedures can be readily used in your own programs.

An advanced teletext screen editor gives you point-plotting and line-drawing, rubber-banding and even a flood-fill. In addition, full text facilities including all the mode 7 control codes are available. The program is easy to use with detailed help screens and has been written in 100 per cent machine-code for speed.

Need some advice on printers? Try our Printer Help Disc only £7.95



Printer Help Disc: much more than a manual

Written by Benjamin Rietti, the programs and tutorials on this disc will help you to understand your printer's facilities.

Printer manuals often don't fully cover the needs of Master and BBC micro series owners – our *Printer Help Disc* will! It includes what to look for in a printer, controlling type styles, using *Wordwise* and *View*, screen images, printer care, an ASCII standard codes table plus how to print £ signs, clear diagrams illustrating


various stages of printer use and a program to display type styles. The *Printer Help Disc* will help you solve problems.

The disc is available in 40 and 80 track format, and is compatible with the BBC models B, B+ and Master 128.

For more printer compatibility details please send a stamped addressed envelope to Seran, Redwood Publishing 141-143 Drury Lane, London WC2B 5TF.

Order form on page 136.

Acorn User's Sideways RAM Utilities Disc £9.95



What could be more helpful than our new Sideways RAM Utilities Disc?

Available in 40 track format with a transfer program for 80 track users, the disc includes:

- RamPad an electronic notepad you can use at any time. Simply press a key for your computer's answer to the notebook and pencil.
- On-screen fonts a variety of print styles available in all graphics modes.

- *HLP ROM add your own help text to call up when you're really stuck.
- Standard ROM header a sideways ROM header you can use as a starting point when writing your own ROMs.

Many more utilities – including *RLOOK to examine the contents of your ROM's and sideways RAM images. The disc is great value at just £9.95.

Order your Sideways RAM Utility Disc using the form on page 136.

Order form on page 136-24 hour telephone service (0672) 40825

GRAPHICS AND GAMES

ACORN USER OFFERS

Gorgeous graphics screens at special prices



Dallas captured on the Gallery Collection

The Gallery disc and Gallery Collection disc have proved to be so popular with you that we've decided to offer you the chance to buy them both at the price of £11.95. Due to overwhelming demand we've extended the offer to the end of April.

The Gallery disc features an automatic scrolling display of over 20 stunning graphic screens. What's more, the disc gives you the chance to create your own screens with Super Painter and Pixel Edi-

tor. Screens include Spiderman, a Coke can, robotic brilliance and many others.

The Gallery Collection presented in the same way as the Gallery disc, contains over 25 screens, including the Dallas Compendium, a picture of earth from space and super cartoons.

The special offer price applies to the 40 and 80 track discs in 5.25in format. The Gallery disc and Gallery Collection discs are now available in 3.5in format.

Games galore at only £3.95 on our Games Compendium cassette



Shuggy's Garden on the Games Compendium

For all games fans using the BBC, Electron and Master we have put together on one cassette all the best games published in *Acorn User* over the last two years.

Included on the cassette is David Acton's blockbusting *Spectramania* and the popular *Quadline* – beat your micro and be the first to get four in a row.


Try guiding Shuggy round his garden collecting apples, but remember to avoid the ravenous monster! You can puzzle over

Puzzle, and be amazed by 3-D Maze. Or if setting depth charges and destroying submarines is more your style, go to sea with Run Silent, Run Deep. You can even try to work out the mysteries of the Acorn User office – enjoy yourself!

For the really adventurous players there is Rob Anderson's truly different *Adventure* game.

This exciting cassette is easily transferred to disc and costs only £3.95.

Acorn User Finest Favourites cassette – just £3.95



Tunemaker: an Acorn User favourite

For only £3.95 you can have this superb cassette which contains some of the best programs published in *Acorn User* since 1985. It will work on the BBC, Master and Electron micros.

Budding Beethovens can edit their own masterpieces with *Tunemaker* and play them back. Or you can add new commands, written in Basic, with Character Dumping and Basic Extensions.

Graphics screens can take up a lot of

time and space, compress both with the Screen Compression program. The graphics treat of the year is the Mandelbrot set which allows you to do the creating. Why spend money on word puzzles when you can use Word Squares to create your own?

Screen Fonts allow you to generate your own on-screen fonts so that you can annotate and label your screen displays in a variety of text styles. Lastly, don't miss captivating curves with Motion!

Order form on page 136 - 24 hour telephone service (0672 40825

ACORN USER ORDER FORM

ACORN USER OFFERS

DISC SUBSCRIPTIONS	RANGE BEING OF	CASSETTE SUE	SCRIPTIONS	
Yes! Please send me my free disc binder an	nd start my disc subscription	Yes! Please start my cass	sette subscription from	the issue
from the issu	e	and send me my free g		
01 UK (six months only*)	□ £30.00	01 UK (six months only 01 UK		1 £20.00 1 £45.00
01 UK 02 EUROPE (Airmail)	□ £69.00 □ £76.00	02 EUROPE (Airmail) 02 OVERSEAS (Surfac 03 OVERSEAS (Airma	e)	1 £52.00 1 £52.00
02 OVERSEAS (Surface) 03 OVERSEAS (Airmail)	□ £76.00 □ £84.00	03 OVERSEAS (Airma	iiĺ) □	£62.00
TOTAL VALUE £		TOTAL VALUE £	*	Games Compendium not included
MAGAZINE SUBSCRIPTION	NS	ACORN USER	MONTHLY DIS	SCS
Yes! Please start my subscription to Acou		1986		1987
10 10016	Issue (UK Subscribers	☐ JAN 0204-6 ☐ FEB 0205-4 ☐ MAR 0206-2 ☐ APR 0207-0 ☐ MAY 0208-9	☐ JUL 0210-0 ☐ AUG 0211-9	☐ FEB 0217-8
see pages 48 and 52 before completing)		☐ APR 0207-0	☐ SEP 0212-7 ☐ OCT 0213-5	☐ MAR 0218-6 ☐ APR 0219-4
01 UK	12 Issues 27 Issues ☐ £17.50 ☐ £35.00	☐ JUN 0209-7	☐ NOV 0214-3 ☐ DEC 0215-1	
02 EUROPE 03 MIDDLE EAST 04 THE AMERICAS & AFRICA	☐ £25.00 ☐ £50.00 ☐ £30.00 ☐ £60.00	UK=£5.95		
04 THE AMERICAS & AFRICA 05 REST OF THE WORLD	☐ £35.00 ☐ £70.00 ☐ £40.00 ☐ £80.00	Europe=£6.95 Overseas=£7.95		
	MALIA MORTOGRADA	All AU discs are in DFS form	at for the 1770 and 8271 syst	tems
TOTAL VALUE £	C surreactive end deep of	TOTAL VALUE £		
ACORN USER MONTHLY	CASSETTES	ACORN USER	MAGAZINE RA	ACK ISSUES
1985 1986	1987	1985		1987 ☐ JAN 0044-2
☐ JAN 0409-X ☐ JAN 0421-☐ FEB 0410-3 ☐ FEB 0422-	9	☐ JAN 0021-3 ☐ MAR 0022-1	☐ JAN 0032-9 ☐ FEB 0033-7	☐ JAN 0044-2 ☐ FEB 0045-0
☐ MAR 0411-1 ☐ MAR 0423- ☐ APR 0412-X ☐ APR 0424-	5	☐ APR 0023-X ☐ MAY 0024-8	☐ MAR 0034-5 ☐ APR 0035-3	☐ MAR 0046-9 ☐ APR 0047-7
☐ MAY 0413-8 ☐ MAY 0425- ☐ JUN 0414-6 ☐ JUN 0426-	1	☐ JUN 0025-6 ☐ JUL 0026-4	☐ MAY 0036-1 ☐ JUN 0037-X	
☐ JUL 0415-4 ☐ JUL 0427-	8	☐ AUG 0027-2 ☐ SEP 0028-0	□ JUL 0038-8	
☐ SEP 0417-0 ☐ SEP 0429-	4	□ OCT 0029-9	☐ AUG 0039-6 ☐ SEP 0040-X	TW 04.75
☐ OCT 0418-9 ☐ OCT 0430- ☐ NOV 0419-7 ☐ NOV 0431-	6 Europe=£4.95	□ NOV 0030-2 □ DEC 0031-0	☐ OCT 0041-8 ☐ NOV 0042-6	UK=£1.75 Europe=£2.25
☐ DEC 0420-0 ☐ DEC 0432-	4 Overseas=£5.95	is Mad Order, I dmiles	□ DEC 0043-4	Overseas=£3.75
TOTAL VALUE £		TOTAL VALUE £ _		
BINDERS				EUROPE OVERSEAS
TOTAL VALUE £		MAGAZINE BINDER DISC BINDER		☐ £7.95 ☐ £14.95 ☐ £9.95 ☐ £16.95

24 hours telephone service (0672) 40825


ACORN USER ORDER FORM

ACORN USER OFFERS

ACORN USER ROMS		ACORN USER SPECIAL CASSETTES					
☐ USERDUMP 1001-4 ☐ USERROM 1002-2 ☐ AXRROM 1003-0	UK = £19.95 Europe = £20.95 Overseas = £21.95	□ ACORN USER GRAPHICS 0601-7 □ BEST OF ACORN USER 0602-5 □ GAMES COMPENDIUM 0603-3 □ FINEST FAVOURITES 0604-1 UK = £3.95 Europe = £4.95 Overseas = £5.95					
TOTAL VALUE £		TOTAL VALUE £					
ACORN USER SPECIAL DISC	S						
GALLERY DISC 40 track 0801-X 80 track 0802-8 GALLERY COLLECTION DISC	3.5in 0803-6 □	SIDEWAYS RAM UTILITIES DISC 40 track 0825-7 Europe = £10.95 Overseas = £11.95					
40 track 0840-0 ☐ 80 track 0841-9 ☐ DISC HELP DISC 80 track 0804-4 ☐ Europe = £7.95	3.5in 0842-7 □ UK = £6.95 Overseas = £8.95	NETWORK UTILITIES DISC 80 track 0809-5 Europe = £20.95 Overseas = £21.95					
PRINTER HELP DISC 40 track 0820-6 □ 80 track 0821-4 □ GRAPHICS UTILITIES DISC		BIBLIOGRAPHY 40 TRACK Jul 82 to May 84 0851-6 £6.95 Jul 82 to May 85 0901-6 £10.95					
40 track 0830-3 □	UK = £7.95	Jun 84 to May 85 0852-4□ £6.95 Jun 85 to Feb 86 0902-4□ £6.95 Jun 85 to Feb 86 0853-2□ £6.95 Jul 82 to Feb 86 0931-8□ £16 Jul 82 to Feb 86 0881-8□ £20 Europe add £1, Overseas add £2					
EDUCATION DISC 40 track 0815-X □	Europe = $£8.95$ Overseas = $£9.95$	SPECIAL OFFER GALLERY DISCS					
TOTAL VALUE £		40 track 0799-4 □ 80 track 0800-1 □ UK = £11.95 Europe = £12.95 Overseas = £13.95					
☐ Ienclose a sterling cheque/postal order	for a total of £	made payable to Redwood Publishing					
☐ Please debit my ☐ Visa (Barclaycard)	☐ Access (Mastercard)						
Creditcard number	DATE	Expiry date					
SIGNED MR/MRS/MISS/MS	INITIALS	SURNAME					
	POSTCODE	TELEPHONE					
Please return your order to: Acorn User Mail Order, Lambourn Woodlands, Newbury Berkshire RG16 7TW							
For Office Use Only	00						
	2 0 0 1 X	0 8 6 N Y D P					
	B41						
		B41					

24 hour telephone service (0672) 40825

LOW COST XYZ TABLES



 $250 \times 400 \times 80$ mm TRAVEL XYZ assembly with 3 stepper motors and screw drives £936 + VAT Industrial version with ball screws £1,356 + VAT Stepper motor drive rack with interface for RS 232 £1,085 + VAT

> LEEWOOD DEVELOPMENTS LTD UPTON, CAMBS. TEL (0480) 890860 (24 Hr)

> > Design your own

PCB

BBC COMPUTER

Lay out double sided PCB on the screen, separating the layers by colour. Store design on disc, recall for editing or plot it on an Epson HI-80. A-4 plotter ready for 2:1 photo reduction. 40 or 80 Trac disc based software £20.

VINDEREN ASSOCIATES, PO BOX 130, BELFAST BT9 6NB. TEL: 0232 667885

READ & WRITE ROTECT

BATTERY BACKED 16K & 32K RAM MODULES NOW AVAILABLE WITH MONEY BACK GUARANTEE

CHECK THESE FEATURES:

- ★ Very compact design (fully cased).
- * Same foot print as a ROM.
- ★ Built-in rechargeable battery to maintain data when computer is switched off.
- ★ No soldering required whatsoever.
- ★ Guaranteed to run ALL ROM based software.
- ★ Comes complete with READ and WRITE protect switches.
- ★ Menu driven software included to Save/Load to/from ROM/RAM on a 51/4", 40 or 80 track disc.
- ★ Easy to follow instructions included.
- ★ If not fully satisfied, simply return the intact module within 14 days for a full refund.
- ★ 10% discount for educational establishments (any quantity)

EXCELLENT VALUE AT £25 for 16K £35 for 32K

(32K version is of same physical size as the 16K version but is logically addressed into two 16K banks. (ie into two sockets).

★ MUST NOT BE USED TO INFRINGE COPYRIGHT ★ PRICES INCLUDE 16K & 32K non battery backed version also available, fully

cased with WRITE protect switch. TELEPHONE FOR FURTHER DETAILS

FLORA ELECTRONICS 14 LEVER ST., PICCADILLY, MANCHESTER M1 1LN (061) 228 3553 (061) 228 3030

16K or 32K MODULE



MIGHTY MICRO

Tel: 061-224 8117 Sherwood Centre, 268 Wilmslow Road, Fallowfield, Manchester M14 6WL

Telex: 295141 TXLINK9 (Att: MBX614 860329) PRESTEL Mailbox: 614860329

PERSONAL EXPORT SPECIALIST WE EXPORT TO OVER 60 COUNTRIES

BUSINESS - COMPUTERS

Amstrad PC1512	Master Dealer
Amstrad PCW Range	Call
Atari 520STFM	
Atari 1040	£522.00
Commodore Amiga	Special Price
Ferranti PC1860 (New)	£895.00
Ferranti PC1860XT/20Mb	
Ferranti PC2860AT/20Mb	£1995.00
Ferranti PC2860AT/40Mb	£2900.00
Epson PC/FD	
Epson PC/HD20Mb	£1439.00
Kaypro PC/768k + Monitor .	
Kaypro PC/20Mb	
Kaypro 286iAT/20Mb/Mono	
Kaypro 286iAT/20Mb/Color	
Kaypro P2000 Lapheld	
Kaypro P2000 LargeScreen	
Sharp PC7000	
Sperry PC/HT100	
Sperry PC/IT 44Mb hard	
Tandon PCX/Mono	
Tandon PCX10/Mono	
Tandon PCX20/Mono	
Tandon PCA20/Mono	

HOME COMPUTERS

11011112 001111 01	
Amstrad 464/6128	Call
Commodore 64 Connoisseur	£206.00
BC Compact	Special Price
3BC Master 128	
HADD DICKE WINCH	ECTEDO

HARD DISKS WINCHESTERS

£139.86
£340.00
£421.75
£260.87
£226.05
£475.00
£635.00
£243.45
£325.78
£260.82
£339.00
£173.86
£260.83

MIGHTY MICRO SPECIAL

AMSTRAD 1512 PC IN STOCK, £50 VOUCHER ON SELECT AMSTRAD PC.

Philips 8501 Color	£156.48
Philips 8533 Color	
Philips BM7502 Green	
Eizo ER3010WL B/W	£109.52
Zenith 1230 Green	£82.56
Zenith 1220 Amber	£91.26

5" Di.x Boxes * 3" Disk Boxes * 3.5" Disk Boxes * 5", 3", 3.5" Floppys, Monitors * 500 Books * Rams * Roms Joysticks * Cables * Listing paper Mouse * Calculators * Modems * Addon PC Boards

And of course Software for Amiga, Amstrad, Atari, BBC, IBM/MS DOS.

EASY ACCESS FROM THE M56, M6, M61, M62, M63, M602

Please add 15% VAT to all prices. Delivery: free to UK mainland over£100

The one you have been waiting for.

The ultimate ROM board. With 64K RAM. Fully expand your Model B for only £25

Edinburgh Software Products brings you the first BBC-B Sideways Ram/Rom extension to accept double density 32K Rams and Roms. This board offers 8 slots each of which can take 2764, 27128 or 27256 Eproms. Two of the slots — MOS sockets 0-1 and 14-15 — can also take 6264 or 62256 Ram chips giving up to 64K of sideways Ram in only two chips!

- 256K Rom board full expansion for a BBC-B.
- 64K Static Ram version.
- Takes Acorn User UserRAM in any slot.
- Two Ram slots for maximum software flexibility.
- Plugs into MOS Rom socket.
- Flexible Write-protect/Read-inhibit capability.
- Eight slots for immediate expansion.
 Accepts Master-style 27256 Eproms.
 Uses 32K chips cheapest cost/bit available.
- Uses less power than other 256K boards.
- All prices fully inclusive of VAT, post and packing.

ESP001: £25.00 256K No-solder Rom Board. ESP002: £30.00

64K/192K No-solder Ram/Rom Board. ESP003: £10.00 Factory upgrade your 256K Rom Board to 64K/192K Ram/Rom Board. Return

your board to us and we will upgrade it for you.

32K CMOS Static Ram chip (62256) for ESP004: £22.00 Ram/Rom Board.

Please note that Ram chips, and switches for write-protect/readinhibit, are not included in the basic boards or upgrades. It is possible to upgrade the Rom Board to accept Ram yourself: full instructions are included with the board; soldering is required. Specifications of all products given in good faith but are subject to change without notice. Availability of some items may vary. Please telephone for latest delivery situation.

Cheques should be made payable to: Edinburgh Software Products.

Edinburgh Software Products 1 Castle Street, Edinburgh. Tel: 031-225-3185

NOW ALSO AVAILABLE FOR THE MASTER COMPACT



a bar



The Music System

is the most advanced micro based music program for the BBC microcomputer

is sophisticated, yet smooth and simple to use features unparalleled create, edit, play and print tunes facilities

the Song & Sound Library immediately releases the flavour of both vintage and nouveau compositions

the acclaimed Instruction Manual uncorks all the secrets to its successful and easy use

LET THE MUSIC FLOW, LIMITED ONLY BY YOUR OWN TASTES AND IMAGINATION

BUY THE MUSIC SYSTEM TODAY!

DISC PACK: EDITOR ● SYNTHESISER ● KEYBOARD ● LINKER ● PRINTOUT ● SONG AND SOUND LIBRARY ● £29.95 INC VAT

CASSETTE 1: KEYBOARD ● SYNTHESISER ● SOUND LIBRARY ● £14.95 INC VAT.

CASSETTE 2: EDITOR ● PRINTOUT ● SONG AND SOUND LIBRARY ● £14.95 INC VAT. PLEASE ADD £1.25 P&P PER ORDER.

ADDITIONAL SONG LIBRARY DISC: 2 TOCCATA AND CAROLS ● 3 400 YEARS OF MUSIC ● 4 MAINLY BACH ● 5 IAN WAUGH ORIGINALS ● 6 OLD FAVOURITES ● E4 EACH INC VAT, POSTAGE FREE.

NEW UTILITIES DISC: ● KEYBOARD ● MUSIC FILE CONVERTER ● PLAY FROM BASIC UTILITY TMS MUSIC FILE CONVERTER ● £6 INC VAT POSTAGE FREE ● NOW WORKS ON BBC MASTER, B+ AND ALL DFS AND DDFS (INC. SOLIDISC AND WATFORD).

ECONET VERSION £89.70 INC VAT PLUS £1.25 POSTAGE. AMSTRAD AND COMMODORE 64 VERSIONS ALSO AVAILABLE.

ORDERS TO SYSTEM DEPT. A, 12 COLLEGIATE CRESCENT, SHEFFIELD S10 2BA (0742) 682321.

DEALER ENQUIRIES WELCOME







RAM MODULES TAPE, DISC & NETWORK systems

- * Plugs into any ROM socket, no soldering
- * 32k occupies two sockets (2×16k banks)
- * Easy-fit small size 35X18X14mm fully encased
- * ATPL versions available adds extra 16/32k
- * Software includes full Load/Save/List ROMs 15k Printer buffer, Network easy-loader, View driver generator. Full documentation




Please state 40 or 80 Track Disc.

RINTER SWITCH BOXES

- ★ Complete with all cables & connectors

 1-7M
- * Robust plastic case, 100×50×20mm
- ★ Selection by colour indicator button
- * Printed circuit board construction
- * Ready to use just plug in


PS1 2 BBC'S TO 1 PRINTER £35 PS2 1 BBC TO 2 PRINTERS £38



EPROM PROGRAMMER

- * Programs 8k & 16k EPROMS, 21v & 12.5v
- * Operates from the BBC's user port
- * Low power c-mos design, LED indicator
- * Programming is fully automatic
- ★ Superb software supplied on ROM incl: Load/Save/Catalog/Read/Verify/Blank?, Standard/Fast programming algorithm, powerful screen Editor/Fill/Search

£35



Free P&P Send Cheques/PO/Official Orders to: TERRELL ELECTRONICS, 7B Essex Gardens, Hornchurch, Essex RM11 3EH. Tel: (04024) 71426

EDUCATIONAL DISCOUNTS

ROTHERHAM COMPUTER CENTRE Tel: (0709) 369912

Call us now for a price list

BBC Master 128	£385 + VAT
Master turbo – upgrade	600 00
Master 512/upgrade	£189.00

SPECIAL OFFER

100K disc drives/Opus/Cumania from £59.00
MONITORS (including BBC Cable) PRINTERS

Microvitec Microvitec Mitsubishi Phillips Phillips Phillips Taxan		MED MED HI HI HI	RES RES RES RES RES	RGB RGB	£74.00	Star Citizen		80 col NLQ 80 col NLQ 80col NLQ 135 col NLQ 80 col NLQ	£209.00	
---	--	------------------------------	---------------------------------	------------	--------	-----------------	--	--	---------	--

DISC DRIVES

* UFD CSX400A	40/80	D/S	93.00
* UFD CS400B	40/80	D/S + PSU	£104.00
* UFD CDX800SE	40/80	D/S Dual	£184.00
* UFD CD800SE	40/80	D/S Dual + PSU	£199.00
+ MD 400A	40/80	D/S	£114.00
+ MD 400B	40/80	D/S + PSU	£126.00
+ MD 802C	40/80	D/S Dual	£209.00
+ MD 802E	40/80	D/S Dual + PSU	£235.00
+ MD 802 DM	MD802F	In master plynth	C255.00

+= "ALL MD DRIVES HAVE A 2 YEAR WARRANTY"

*= "While stocks last"


Please add 15% VAT to all prices
Carriage – items below £200 add £4.00
Items above £200 add £6.00
All orders dispatched within 48 hours
subject to availability.

ROTHERHAM COMPUTER CENTRE 135 WELLGATE ROTHERTHAM S60 2NN Tel: 0709 369912

REVIEWS

GAMES

SPOT THE DIFFERENCE



The Last of the Free; ASL; Electron/BBC B/Master cassette £7.95. Quest for Freedom; IJK; Electron cassette £1.99.

Quest for Freedom, an Electron-only game, bears a remarkable resemblance to ASL's Last of the Free, which is available for both the Electron and the BBC micro, and was reviewed in February's Acorn User.

IJK claims to have bought the game from its author, Peter Scott, who later offered it to ASL, who, apparently unaware of IJK's involvement, then released its own version. Ian Sinclair, a director of IJK, told me: 'Although we owned the copyright to Quest for Freedom, after talking to ASL we believed they published their program in good faith, and we decided to take no further action.'

So, which version would I recommend? Superficially, IJK's game appears to have more going for it, since it is only a quarter of the price of the ASL version. But although the characters and scenes are almost identical, the ASL version is a far more balanced and playable game, with enough easy problems to get you going before the nastiness starts, and a significantly better 'feel'.

Quest for Freedom, then, offers a lot of game for £1.99, but remember it takes more perseverence to get into than Last of the Free. And one final word of warning – the publishers don't tell you, but you'll need to disable your Plus One before playing either version. If you're unsure

how to do this, see Martin Phillips' Hints and Tips in the October 1986 issue of *Acorn User*.

Bernard Emblem

GOAL OUT OF CONTROL

Goal; Tynesoft; Electron/BBC B/B+/ Master cassette £6.95; BBC B/B+/ Master disc £8.95; Compact 3.5in disc £9.95

These double-sided tapes are a great idea, but why are so many of them incorrectly labelled? Time and energy could be saved if just a little thought was given to file names, for example using 'Elkload' or 'Beebload' instead of 'Loader'.

Goal features a view of the section of the pitch currently containing the ball – either the goal mouth or the centre of the pitch – and involves a match between Liverpool and Tranmere Rovers. Guess which team I was attempting to control!

Although the game lacks joystick control and a two-player mode, it is a fairly realistic simulation, offering goal kicks, throw-ins, balls which bounce back into play off the goal post, and more. Play lasts for a token 90 minutes – in reality 30 minutes – and although there's a half time whistle, the teams don't change ends. This is a pity, as it allows Liverpool to kick towards the Kop for the whole match. A novel educational feature is that the scores are displayed in hexadecimal notation, which helps keep the tally down.

The machine emits a helpful beep when Tranmere make contact with the ball, but also insists on a dreadful and interminable congratulatory tune every time Liverpool score. I can only advise you to keep your thumb on the space bar throughout. It stops the music, but allows the beeps.

I could forgive this game its many minor shortcomings if it wasn't for a fundamental flaw: it's just too difficult for beginners. It claims to adjust its skill level during the game depending on the current state of play, but no-one I know would play it twice. I persevered out of a sense of duty, but never scored a single goal.

Bernard Emblem

CURRY INA HURRY



Vindaloo; Tynesoft; Electron/BBC B/B+/Master cassette £7.95; BBC B/B+/Master disc £9.95; Compact 3.5in disc £12.95.

Raj, the proprietor of an Indian restaurant, has unfortunately eaten too much of his own wares. This has resulted in him needing to reach his loo rather urgently.

He has, however, got a long way to go since his loo is somewhere deep in his cellar. Thus to get there he must first make his way through all of the rooms in his path. Each of these rooms contain a number of objects which must be avoided if he is going to make it in time. Snakes, heads, skulls and bouncing balls plus falling through floors are just some of the things which Raj must avoid.

You must guide Raj through all these rooms to the loo. The keys you use are the simplest I've seen in any game yet; just Z and X for left and right. This makes the game sound easy. Not so!

Each of the screens has a very imaginative title to it, relevent to the screen you are on, such as Skull Level 4.

The graphics are good but not brilliant. Movement is smooth (2 pixels at a time) and colour is well used. The sound is not superb either, but bearable.

The plot and action have a very original flavour (ha ha) and are well supported by the quality of the game itself. I would say it would make an interesting addition to anyone's library.

Gavin Gillings

the Memory

At last an effective totally transparent overlay system for BBC Basic.

VERLAY BASIC

You need never again run out of memory when programming and you can easily incorporate your favourite procedures in programs time and time again.

OVERLAY BASIC

Offers a series of new commands enabling you to create a library of subroutines. These subroutines will be automatically called in from disk*, used and forgotten whenever referred to by your program. A program which once occupied 64K RAM may now only



Run-time module lets other BBC owners run your overlay programs without the chip

OVERLAY BAS

ROM plus 5.25' demonstration disk £29.95 (inc VAT & postage)

Payment must accompany order, and may be made by: I. Cheque: Made out to 'Elsevier' in pounds sterling.

2. Credit card: We accept AmEx, Visa and Access. Please give card number, expiry date, issuing bank (if appropriate), the cardholder's name and address and signature.

AVAILABLE ONLY FROM:

Elsevier - BIOSOFT

68 Hills Road, Cambridge CB2 ILA Tel: (0223) 68622.

PRINTER MADNESS

DOT MATRIX PRINTERS	
Epson LX86 - The Best Seller in the World	£19500
Star NL10-The Number Two Seller - Best Spec	£21000
Star NX15-The New Wide-body NL101	£291.00
Panasonic 1080 100cps & 80 col - A Hot Seller	£14500
Epson FX105+ - The Old Favourite	£38900
Epson FX85 + - IBM Made This One Famous	£28900
Epson LO800 Letter Quality - 24 Pin Printhead	€428.00
Epson LQ1000 Letter Quality - 24 Pins	£571.00
Epson LO2500 - This one is really good!	€72500
Epson SQ2500 - Ink your jet with this one!	£99900
Epson FX800 - Brand New!	£32400
Epson FX1/100 - Brand New!	€41500
Epson EX8i 0 300cps & 80 column - Super Fast	£38500
Epson EX1600 300cps & 136 column - Super Fast	£51700
Star NB15-The big. up-market Star 24-pin.	€69900
Juki 5510 - A Best Seller	€27000
Star SR15 200cps wide carriage - Good Buy	£37500
Seiko-sha MP1300AI - 300cps* (EX800 clone)	£302.00
MP 165 - Cheap Fast and Good Quality	£170 00
MP 200 - 132 Column 200cps1	£26000
MP 201 - 132 column 200cps	€295.00
NEC P5 - Heavy-Duty Office Favourite!	£780.00
NEC P6 - Good Buy	£41100
NEC P7-Worth a Look	£449.00
Oki Microline 182 - The Number 2 Brand	£205.00
Oki Microline 192 - Perennial Favourite	£299.00
Oki Microline 193 - Worth A Look	£369.00
Oki Microline 293 - Worth A Look	£60800
Citizen MSP-15 160cps & 80 column	£32900
Citizen MSP-25 200cps & 132 column-Try II	228900

DAISY WHEEL PRINTERS	
Quendata DWP1120 - The Best Seiler - 20cps July 6100 - 20cps July 6200 - 30cps July 6200 - 30cps July 6300 - 40cps July 6500 - 60cps Brother HR35	£145.00 £227.00 £407.00 £660.00 £899.00 £739.00

PLOTTERS, DIGITIZERS & LASERS

THINTEN ACCESSORIES	
IBM - Compatible Centronics Parallel Cable (Round) BBC Centronics Parallel Cable (Robon) Seria Seria Cable (Robon) Seria Seria Cable (Robon) Seria Seria Cable (Robon) Seria Seria Cable (Robon) Fan Fold White Paper Thir long, 1000 sheets BO Col Printer Stands 132 Column Printer Stands Adjustable Floor-Standing Printer Stands	£11.5 £75 £20.0 £35.0 £6.9 £21.7 £29.0 £80.0

The second	the factor	-	400	100	200	21122	-	-
COL	OH	о.	•]•	•и.	IT		•Т	
0.01	•••		ж.	ш	ш	_	ıc	

1 JX80 1 EX-Series Colour Upgrade Option

DISKETTES

ARD DISKS, ADD-ON BOARDS,

64k dRAM chips (nine to make 64k)	£1 15 each
256k dRAM chips (nine to make 256k) 150 Ns	£300 each
8087 5mz Maths Co-Processor	£120.00
8087 8mz Maths Co-Processor	£175.00
80287 Maths Co-Processor	€229.00
AST Six Pack Plus 64k memory Multifunction Card.	€197.00
Qubie Six Shooter Multifunction Card 64k memory	£150 00
Intel Aboveboard with 0k installed	£325 00
Plus Hardcard 10mb	£350.00
Plus Hardcard 20mb	€595.00
Qubie 20mb Hard Pack	£450.00
Mountain 20mb Mountain Card	£65900
Seagate 20mb Hard Disk with WD Controller & Cables	£350.00
Hercules Colour Card	£100.00
Ram Cards 0k. 256k, 384k, 512k	Call
Hercules Mono Graphics Card	€179.00
Hercules Mono Plus Graphics Card	£189.00
Clone Hercules Card	685.00
Mouse Systems Mouse with Pop-Up Menus & PC Pain	£12500
Microsoft Bus Mouse	€135.00
Summa Mouse with Gem Collection	£189.00

0727-72790 ==

99 PARK STREET LANE - BRICKET WOOD - HERTFORDSHIRE - ALZ 2JA - ST ALBANS (0727) 72790

C & F ASSOCIATES SELECTED BBC/ELECTRON PROGRAMS

RRC CASSETTE

BBC CASSI	EILE	
ANNUAL PROPERTY OF THE PARTY OF		OUR
TITLE	RRP	PRICE
Sentinel	9.95	7.75
Elite		10.95
Revs		10.95
Ravenskull		7.75
Colossus Chess	0.05	7.75
Ponton 2	0.05	7.75
Repton 3	9.95	7.75 7.75
Strykers Run	9.95	7.75
Psycastria	7.95	6.75
Thrust	7.95	6.50
Mikie	6.95	6.95
Spy Hunter	9.95	7.75
Crystal Castles	9.95	7.75
Commando	9.95	7.50
Yie Ar Kung Fu		7.50
Yie Ar Kung Fu 2 Exploding Fist	9.99	7.20
Exploding Fist	9.95	7.50
Impossible Mission	8.99	7.20
Commonwealth Games .	7.95	6.50
Galaforce	9.95	7.50
Citadel	9 95	7.50
Jet Set Willy	7.95	6.50
Raid Over Moscow	9.95	7.75
Project Thesius	9.95	7.95
Trivial Pursuit	14 95	12.95
Repton 2	9.95	7.50
Speech	9.95	7.50
Myorem	0.05	7.95
Karate Combat	9.05	6.95
Phantom Combat	0.05	7.50
Scrabble	12.05	10.95
Price Of Magik	0.05	
Price Of Magik	9.95	7.50
Brian Cloughs	9.95	7.50
	014.05	40.05
Football Fortunes	114.95	12.95

BBC DISC

TITLE	OUR
TITLE RRP	PRICE
Elite 14.95	12.95
Revs14.95	12.95
Ravenskull 11.95	10.95
Colossus Chess 14.95	12.95
Scrabble14.95	12.95
Repton 3 11.95	10.95
Strykers Run 11.95	10.95
Trivial Pursuit 19.95	17.50
Mini Office 2	14.95
Hyper Sports 12.95	10.95
Galaforce 11.95	10.95
Enthar 7 16.95	14.95
Project Thesius 11.95	10.45
Speech 11.95	10.45
Exploding Fist14.95	12.95
Citadel 11.95	10.45
Thrust 11.95	10.45
Lord Of The Rings 19.95	16.95
Sink The Bismark 10.99	9.95
Graphic Adv. Creator 27.95	22.95
Sentinal 14.95	12.95
Crystal Castles 14.95	12.95
Brian Cloughs	12.00
Football Fortunes £17.95	15.95
	10.00
ELECTRON CASSETTE	
Repton 3	7.75
Ravenskull 9.95	7.75
Citadal	7.50

Repton 3 9.95	7.75
Ravenskull 9.95	7.75
Citadel 9.95	7.50
The Quill 16.95	14.95
Thrust 7.95	6.50
Impossible Mission 8.95	7.20
Brian Cloughs	
Football Fortunes 14.95	12.95

ALL PRICES INCLUDE VAT AND POSTAGE AND PACKING (Overseas Orders add £1.00 per item)

Cheques/PO payable to:

C & F ASSOCIATES

C & F ASSOCIATES (AU) PO BOX 2 BIDEFORD EX39 3RE Tel: (023 73) 619

Orders normally dispatched within 24 hours of receipt but allow a maximum of 7 days

REVIEWS

GAMES

THE GAMES PAGE

David Lawrence with his round up of the games scene and the high score table

Acorn User high score table

Yet another quiet month. In fact, I have only received three new games, but these are certainly worth a mention before I let the reviewers out of their cages. If you remember Rob Miller's review of *Psycastria* in February's issue, you will probably recall his main criticism was the small size of the screen. But that record has now been well and truly broken! *W.A.R.* (even though it is spelt like that on the box, it doesn't seem to stand for anything) by



W.A.R.'s record-breaking small screen

Martech has a playing area approximately three by four-inches (on a 14in monitor!). Funnily enough, the idea of the game is very similar to *Psycastria*. The graphics, though monochrome, are very good and scrolling is excellent. I'll send this one to Rob with a magnifying glass!

Daley Thomson's Supertest from Ocean is yet another Spectrum conversion of yet another sports simulation. You know, the sort of game that totally destroys your fingers and Z and X keys. There are eight events, each one giving your physical ability a gruelling test. Nothing special, but the variety of events should mean that you won't get bored after half an hour.

Finally, Imagine have come up with a sequel for their popular combat game Yie-Ar Kung Fu, called what else but Yie-Ar Kung Fu 2. How original. The game is very similar to number one, but with better background graphics and more stages and challenges. Peter Johnson, author of Impossible Mission and many other of the Commodore 64 conversions, has certainly come up with another addictive winner.

The most common noise in the AU

GAME SCORE NAME Alien 8 28 lost F Brown Android Attack 149,105 T Hedger Arcadians 98,020 N Islam Aviator 30,450 P Hopgood Battletank 117,400 S. Gayler Beach Head 166,000 N Brown Castle Quest 3,020 F Brown Centipede 2,000,010 C Cochrane Chukkie Egg 32,002,640 N Wright Commando 417,600 P Sharrock Contraption 993,200 C Cochrane Cybertron 715,960 N Islam
Alien 8 28 lost F Brown Android Attack 149,105 T Hedger Arcadians 98,020 N Islam Aviator 30,450 P Hopgood Battletank 117,400 S. Gayler Beach Head 166,000 N Brown Castle Quest 3,020 F Brown Centipede 2,000,010 C Cochrane Chukkie Egg 32,002,640 N Wright Commando 417,600 P Sharrock Contraption 993,200 C Cochrane Cybertron 715,960 N Islam
Android Attack 149,105 T Hedger Arcadians 98,020 N Islam Aviator 30,450 P Hopgood Battletank 117,400 S. Gayler Beach Head 166,000 N Brown Castle Quest 3,020 F Brown Centipede 2,000,010 C Cochrane Chukkie Egg 32,002,640 N Wright Commando 417,600 P Sharrock Contraption 993,200 C Cochrane Cybertron 715,960 N Islam
Arcadians 98,020 N Islam Aviator 30,450 P Hopgood Battletank 117,400 S. Gayler Beach Head 166,000 N Brown Castle Quest 3,020 F Brown Centipede 2,000,010 C Cochrane Chukkie Egg 32,002,640 N Wright Commando 417,600 P Sharrock Contraption 993,200 C Cochrane Cybertron 715,960 N Islam
Aviator 30,450 P Hopgood Battletank 117,400 S. Gayler Beach Head 166,000 N Brown Castle Quest 3,020 F Brown Centipede 2,000,010 C Cochrane Chukkie Egg 32,002,640 N Wright Commando 417,600 P Sharrock Contraption 993,200 C Cochrane Cybertron 715,960 N Islam
Beach Head 166,000 N Brown Castle Quest 3,020 F Brown Centipede 2,000,010 C Cochrane Chukkie Egg 32,002,640 N Wright Commando 417,600 P Sharrock Contraption 993,200 C Cochrane Cybertron 715,960 N Islam
Beach Head 166,000 N Brown Castle Quest 3,020 F Brown Centipede 2,000,010 C Cochrane Chukkie Egg 32,002,640 N Wright Commando 417,600 P Sharrock Contraption 993,200 C Cochrane Cybertron 715,960 N Islam
Castle Quest3,020F BrownCentipede2,000,010C CochraneChukkie Egg32,002,640N WrightCommando417,600P SharrockContraption993,200C CochraneCybertron715,960N Islam
Centipede2,000,010C CochraneChukkie Egg32,002,640N WrightCommando417,600P SharrockContraption993,200C CochraneCybertron715,960N Islam
Chukkie Egg32,002,640N WrightCommando417,600P SharrockContraption993,200C CochraneCybertron715,960N Islam
Commando417,600P SharrockContraption993,200C CochraneCybertron715,960N Islam
Contraption 993,200 C Cochrane Cybertron 715,960 N Islam
Cybertron 715,960 N Islam
Eagle's Wing 112,700 R Schmidt
Exploding Fist (B) 397,100 C Parsons
Exploding Fist (E) 597,000 H Moore
Fortress 138,720 S Gayler
Frak! 20,000,200 P O'Malley
Free Fall 5,024 P Comber
Hopper 63,104 N Brown
JCB Digger 131,450 S Concorar
Karate Combat 132,250 A Beard
Killer Gorilla 836,475 S Concorar
Match Day 14-0 P Harvey
Meteors 498,500 P Ludgate
Missile 469,225 I Boffin
Monsters 283,000 S Concorar
Moonraider 642,125 S Concorai
Mr Ee! 1,286,850 C Cochran
Overdrive (B) 380,640 S Gayle
Overdrive (E) 1,130,700 S Jame
Painter 203,690 N Shav
Pengo 312,900 S Killwort
Planetoid 3,186,450 S Concora
Pole Position 384,250 N Islam
Revs (Oulton Park) 1:17.9 C Cochran
Rocket Raid 168,010 S Gayle
Snake 1,395 P Simpso
Snapper 2,005,120 M P Jarma
Space Adventure 4,890 M Bradshav
Starship Command 8,420 I Boffi
Stryker's Run 16,100 P Sharroc
Thrust 1,054,450 T Simpso
Zalaga 29,329,420 S Gayle
5C 1 1 1 1 1 1 1

offices at the moment is that little tinkly tune at the start of *Repton 3*. In a concerted effort we have finished most of the screens and have had fun trying out the bugs that people have pointed out to us. It is possible to change mode when entering a password (with CTRL-V); screen E in toccata is impossible to do if you use a password (ie, without doing screen D first). This only occurs in very early issues of the game as the fungus in screen E starts growing before you start the screen! If your copy



The more challenging Yie-Ar King Fu 2

does this, send it back to Superior who will send you a replacement. Finally, try finishing a screen except for defusing the timebomb, then move onto the timebomb and just before the screen clears, press Return (for your status), then press Space to return to the game. You will be back on the screen but with no timebomb! We occasionally appear in the middle of a wall, but suspect this is because of the Econet, so disable it first on a networked machine.

David Downes has sent in an interesting key sequence for Tynesoft's Vindaloo. Load the game as usual and pause it. Then press CTRL-f9, which will increase your number of lives to eight next time you die! This can be repeated as often as necessary. Nice one, Dave. If anybody else has found things like this, please send them in. There is, I hear, a cheat mode in Psycastria; if anybody has found it, I would be grateful. All I managed to find was that if you hold down I, L, T, D and N on the title screen the game 'presses' CTRL-Break!

I have had a number of requests for clues for *Dr Who* and the mindless (sorry) *Mines* of *Terror*. If anybody knows how to get anywhere in the game, or has drawn a map, please send it in.

The latest round-up of scores is printed above. Please keep your submissions coming in, as I haven't received many over the festive season. Don't forget to get two people to witness and sign your score and send in a screen photo if possible.

Next month is going to be a *Repton 2* special, so if you're still stuck amongst the skulls and spirits this will be for you.

The Memory Lingers on

SoftOscilloscope

A multi-featured emulation of the storage oscilloscope for BBC, B+ and Master.

In two versions: for hobby, educational or professional use. SoftOscilloscope takes you all the way from 'seeing' the output of your games paddle up to fast real-time data acquisition and analysis in professional environments. Every school and college should have SoftOscilloscope.

WHAT YOU GET

Soft Oscilloscope EPROM appropriate to version. SoftOscilloscope program disk. Detailed SoftOscilloscope manual. Analog to-digital converter printed circuit board to create your own ultracheap A-D converter.

Overlay BASIC EPROM, demonstration disk and manual. SoftOscilloscope OSC and SoftScreen applications manuals to show how to collect and display data fast in real-time. Disk of additional SoftOscilloscope routines.

WHAT YOU CAN DO

Work with one or two analog inputs.

Use on-board games paddle converter for data collection at up to 100 Hz with real-time display and scrolling. Trigger as signal on first channel passes a threshold. Single sweep or sweep continuously. Low-pass filter on one channel and display results on 2nd channel. Signal-average sweeps of data. Store data in memory, on disk - including current system settings. Retrieve data from disk into memory and replay. Screendump to Epson printers. Calibrate the sample timings. Display a second channel against first. Interface to external A/D converter for data collection at up to 50,000 Hz. routines installed for above card, Unilab, Griffin & George, Philip Harris, 3D and Oasis. Real-time display of data at up to 500 Hz, at faster speeds data alternately collected and displayed. Interfaces with controlled gain and/or D to A converters can be supported.

Open access to all systems: adapt fully to your own requirements. Supports user-supplied trigger sensing routines. Post and pre-trigger. Collect several pages of data. Provide additional facilities for user-supplied fitters. Analyse data in real-time with user-supplied BASIC or machine code routines. Write a configuration file which can be used by another BASIC program to collect, display and analyse data.

Education version £49.95

Professional version

€199

Payment from individuals must accompany order, and may be made by:

- 1. Cheque: Made out to 'Elsevier' in pounds sterling.
- 2. Credit card: We accept AmEx, Visa and Access. Please give card number, expiry date, issuing bank (if appropriate), the cardholder's name and address and signature. Institutional purchase orders acceptable.

AVAILABLE ONLY FROM:

Elsevier – BIOSOFT

68 Hills Road, Cambridge CB2 ILA Tel: (0223) 68622.



Can I try Elite now?

Our staff are well trained and friendly, and fully prepared to answer all your queries about our wide range of software and hardware. We are official Acorn dealers and take pride in efficient and friendly service. By the way, Tristan, the cuddly dog in the 'photo is an expert of Sabre Wulf.

NUMBER ONE IN BROMLEY

ata /tore

6 Chatterton Road, Bromley, Kent. 460 8991

AA55

BEST PRICES IN THE U.K.



Low cost Acoustic Modem for BBC Model B. All software and leads supplied. 1200/1200 and 1200/75 Baud switchable. **British Telecom Approved** Limited offer only £19.95

ROMS for BBCs at Special low cost prices.

Interword £44.00 Interchart £22.00

Intersheet £35.00 All three for only £90.00 Printmaster £17.50

View Family all at huge Discounts

View 2.1 £29.00 Viewstore £29.00 Viewspell £25.00 Viewsheet £29.00 View Index £10.00

All prices exclude VAT. CARRIAGE FREE IN U.K.

We specialise in hardward upgrades and exchanges: Phone now for details.

Approved Amstrad and Acorn Dealers. Phone 031-657 2988 between 9.30-5.30 Mon.-Sat.

PORTOBELLO TRADING COMPANY. 196 PORTOBELLO HIGH STREET, EDINBURGH, **EH15 2AS**

David Spencer examines the R & D speech recognition system, Micro-Voice

For many years people have dreamed of computers which they could talk to, and which would talk back to them. Human speech is however a very complicated process, and while we have seen a proliferation of speech synthesis techniques for the BBC micro in the past couple of years, the opposite process, speech recognition, has largely been ignored.

The Micro-Voice from R&D Speech Technology goes a long way towards filling this gap. Micro-Voice, a small unit, costing £149 plus VAT, is a complete speech recognition and high quality synthesis system for the BBC micro.

The main unit is a small black box about four inches by two inches and six inches deep. It is supplied with cables attached, along with a microphone complete with stand, a sideways ROM chip for the micro, a demonstration disc and a manual. This last item is rather thin (11 pages), but does describe the commands available quite well, with program fragments to illustrate their use. Sadly, no technical information is included, but there is a user survey to fill in and send back.

To get Micro-Voice running involves installing the ROM, connecting the device to the computer and plugging in the microphone. The ROM can be plugged into any sideways ROM socket, and people who don't feel confident can have this done by returning their computer to R&D with a cheque for £5 plus postage. The actual voice recognition unit is plugged into the 1MHz bus and the auxiliary power connector under the computer (the one used for some disc drives). If you have something plugged into the power socket this can now be plugged into the back of the Micro-Voice. If you are using the 1MHz bus, for example for a hard disc or a teletext adapter, you will need to purchase a special cable allowing two peripherals to be plugged into the bus. The microphone is plugged into the left-hand jack socket on the front of the Micro-Voice.

Also on the front panel is another jack socket for a headset which can be purch-



The Micro-Voice, very good performance if you follow the recommendations in the manual

ased from R&D, a red LED (light emitting | diode) which indicates the system is listening, and a chrome volume control.

On powering up the computer, you get a nasty surprise. On a Master 128 the value of PAGE is pushed up to &1A00, meaning that the speech ROM has claimed 3k of workspace. On a BBC model B with an advanced disc filing system and Econet, PAGE is at &2500. Therefore long programs in high resolution modes are impossible. It is a pity that the ROM isn't written to make use of the hidden RAM on the Master computers.

Before the system will recognise anything it must programmed with 10 words using the *TRAIN command. This command takes two parameters, the first a number between one and 10 which represents the word being taught, known as the template number, and a second number

which when zero will start a new definition, and when non-zero will average the new definition with the old one for that word. The instructions recommend that each template is trained twice, first without averaging, and then with. It is possible to take more than two samples, but if too many are used it will deteriorate rather than improve the stored template. When the *TRAIN command is executed the LED on Micro-Voice lights, and after waiting about a second to allow background noise to be filtered out the word should be spoken. The software detects when the word is finished.

Once the 10 word templates have been programmed the system is ready to listen for words. This is simply done with the *LISTEN command which lights the LED and waits for a word to be spoken. The command exits when a word is detected,

HAVE A WORD WITH YOUR MICRO

R & D Speech Technology's MICRO-VOICE and MICRO-VOICE BASIC are the definitive speech recognition devices for Microcomputers. They deliver full speech input facilities for your system, giving you keyboard free operations. They feature Real Time Fourier Analysis of the incoming speech and Dynamic Time Warping software techniques for making the recognition decisions. The MICRO-VOICE: 1. Has unlimited recognition vocabulary stored in 10 phrases subsets which means that a wide variety of words and commands can be stored. 2. Listens and replies in any language and hence is independent of dialect. 3. Comes with detailed operating instructions and training enabling it to be quickly and easily incorporated into any program. 4. Is totally reliable and achieves 95% accuracy giving effectively error free operation. 5. Has exceptionally low memory usage using 1080 bytes per template set leaving plenty of memory space for user programs. £149.00 + VAT. The MICRO-VOICE BASIC offers all the above except voice reply for those who do not require that facility. It has a recognition time of less than 0.5 seconds. £99.00 + VAT. Additional ROMS are available for both MICRO-VOICE and MICRO-VOICE BASIC: ROM extension 1, allows a maximum of 15 words or phrases to be stored per template. £15.99 + VAT. ROM extension 2, allows a selectable number of words or phrases between 1-20 to be stored. £24.99 + VAT.

See us at the **UMIST Show,** Manchester, Stand 38. March 20th-22nd.

For further information and orders please write to:



R&D SPEECH TECHNOLOGY LTD

Waterside House, Ponsharden, Penryn, Cornwall TR10 8AR. Tel: 0326 75290.

REVIEWS

HARDWARE/GAMES

and the number of the word matched can be read from location &70. Location &71 contains a matching correlation between zero and 127. A value of zero means that the word was matched perfectly, while a value of 127 means that the matched word is only probably correct.

Also included in the ROM are the commands *RLOAD and *RSAVE which can load and save a set of 10 templates, which allows libraries of words to be built up and incorporated into your own programs. The final command is *TALK which speaks a word either from ROM or RAM, the word being selected by its address in memory. R&D Technology will code the words on an audio cassette to the LPC format at a cost of £1 per word, which seems rather on the expensive side.

For the technically minded the Micro-Voice uses a method of storage known as Linear Predictive Coding (LPC), which is the same technique used by the Acorn speech system for the BBC micro. This method uses certain properties of speech to cut down the information which needs to be stored. The software also includes Dynamic Time Warping, which sounds like something straight out of *Star Trek*.

The demonstration software is on a 40 track disc, and consists of a recognition and synthesis demonstration along with a version of the coloured pegs *Mastermind* game, with the colours being spoken. The recognition demo simply changes the screen colour at your spoken command, while the synthesis program says one sentence with excellent clarity.

In the advert for Micro-Voice the manufacturers suggest a list of applications ranging from adventure games to data logging, and controlling teletext. Personally I am a bit doubtful of the possible uses, but I'm sure that some people will find this an invaluable aid. As far as performance goes, the system is very good, especially if you follow the recommendations given in the manual, such as banishing the children from the room. But at over £150 I don't think that Micro-Voice should be bought just as a novelty.

Micro-Voice costs £149 plus VAT, optional headset £25 plus VAT and word programming £1 per word. Available from R&D Speech Technology, Waterside House, Pondersharden, Penryn, Cornwall TR10 8AR.

FOOLPROOF ADVENTURE

Your Adventure; Learning and Training Systems Ltd, MACE.

Your Adventure is an educational game package, suitable for six to 13 year olds, according to the blurb. It is also suitable for teachers, I found – but maybe I'm a six-year-old at heart!

Two sample adventure games are included on the single 40-track disc, plus some extra programs. The adventures are very short (as you would imagine they have to be for the youngest pupils), but there is an attractive and attention-grabbing mode 7 graphics screen representing the map of the adventure. As the game is played, a symbol representing the adventurer jumps around this screen, visiting various locations, but not in any sequence.

At each location a standard description is given, and then a problem is presented. This takes the form of a riddle, general knowledge question, or puzzle expressed in words. The child has to answer correctly to be awarded one unit of treasure, can be given a hint if his or her first answer is wrong, or can be told the answer. Usually, however, the child is left hanging if he doesn't know the answer — most annoying, I found, as I couldn't guess some of them myself. No doubt the average six-year-old would find them a walk-over.

The adventurer ends up at the cave where all the treasure earned is collected, and must answer one final super-riddle to get at the gold (represented merely by pound symbols). It's all very mercenary, but no doubt fits in with the present Government's long-term strategy for primary education.


Incidentally, there are very few bugs in the program, beyond the spelling on the pack; I found only one. All programs load first time, and although the adventures are a bit slow, nothing goes obviously wrong.

The real point of *Your Adventure*, however, is still to come. This is the Specify program — an editor which allows you to change the riddles in the adventure, and to leave out some of the locations if you wish. The extent to which you can tailor the adventure is strictly limited, though. The map always remains the same, and the locations the child can visit are therefore fixed in character. For this reason older children will quickly tire of playing the games, and the intention is certainly to move them on to creating their own 'adventures'

using the editor. The editor itself is very straightforward, almost foolproof.

All in all, Your Adventure is an enjoyable package that should be given a try. Peter Voke

TREASURE TROVE



Box of Treasures; 4 mation; BBC B/B+/ Masters/Compact/3.5in and 5.25in disc £26.45

This represents a departure from traditional topic-based software. If your school is one where all the computers are in their own special room, and programs are used in complete isolation, you're probably going to consider this package rather expensive. Technofreaks and machine-heads please note that there is more in the box than a couple of discs.

As a resource pack this set of material takes some beating. It comprises two discs bearing nine separate programs, an audio tape containing three stories, six extensive and well-produced booklets, five help cards, a cut-out model, word cards and various labels.

The whole project revolves around the concept of the Box as the central theme. How you go about interpreting this theme is entirely up to you, as there is no definite route, no plan of attack, only stimuli for both teachers and pupils alike.

Mike Matson et al, who have proved themselves masters of the topic pack with such delights as *Granny's Garden*, *Flowers of Crystal* and *Dragon World*, have surpassed themselves in this collection.

They are not aiming at the unenlightened teacher, however. Instead the writers are looking towards those adventurous souls who will transform their whole teaching environment into a world developed from their topic teaching.

Peter Voke

Bernard Emblem speeds up his Electron with a Slogger RAM board

Slogger's Master RAM board offers Electron micro users a solution to the two criticisms most commonly, if rather unfairly, levelled at their machines, that is their limited speed and memory. Though it is already a reasonably fast machine, the Electron does suffer from speed restrictions when compered with the BBC micro, and lack of memory has been a long standing criticism of both machines.

Although the Master RAM Board offers more dramatic solutions than any other add-on, and at a comparatively modest cost, Electron owners would be advised to think carefully before deciding that increased memory and speed will solve all their problems. Are things ever so simple?

Slogger's 'Unique Guarantee' promises return of your micro within seven days of its receipt by Slogger. However, my machine was away for 15 days and it took a phone call before it was returned with its new switch rattling in the box.

The Master RAM comes on a small board containing a 16k ROM, programmed with a new machine operating system (MOS), which sits inside the micro, and automatically switches out the old Acorn MOS. It is connected to a flimsy switch on the side of the micro, which switches between three modes - Shadow, Turbo, and Normal. Let's examine those modes:

1) Shadow mode: In some modes, 20k of the Electron 32k RAM may be used just to handle the screen, leaving precious little left for programs.

The 'Shadow' principle, as used by Acorn themselves, sets aside some memory to deal with the screen (in this case, the Electron's original 32k RAM), and then provides extra memory (here 32k) to deal with programs. Though some memory is required by the operating system in any mode, this means that programs, whether in Basic or machine code, as well as text files when using ROM chip based databases or wordprocessors, can now be up to 28k long. What's more, they'll run faster.

Mathematicians may have realised that, with the original 32k of RAM handling up to 20k of screen display, that still leaves at least 12k unused. Slogger's inadequate user mode, this means that programs, whether



The only signs of the Slogger are the switch and stick-on label


guide suggests that 'the user may wish to use this extra RAM as a printer buffer'. Nice idea, but how do we do it? 'See the section on Technical Information'. Not a great deal of help I'm afraid.

I was pleased to find everything I typed in, all Acorn User software I tested, and all Acornsoft's 'Creative Graphics' programs running at BBC micro speed, with extra memory left for enhancements as required. This is a great boon for people who frequently use Electron programs on a BBC micro, and vice-versa.

2) Turbo mode: Games players will, however, quickly discover that very few commercial games will run successfully in Shadow mode, as most of them write directly to the screen, which has, in effect,

moved address. Turbo mode was created for you. The Electron's memory remains unchanged, but the machine runs at roughly BBC micro speed. Slogger claims that the Electron will now run BBC micro games 'where speed was the limiting factor'. Most Electron owners with access to BBC B games will know this is a very limited promise, since very few model B games will run on the Electron.

Slogger quotes Aviator and Strike Force Harrier as two games which can now be played on the Electron, but I had very little success - two games I tried wouldn't run at all (Noc-A-Bloc and Smash and Grab), one which used to run slowly wouldn't load (Wallaby), and just one was brought up to par (Chukkie Egg). The plain truth is that,

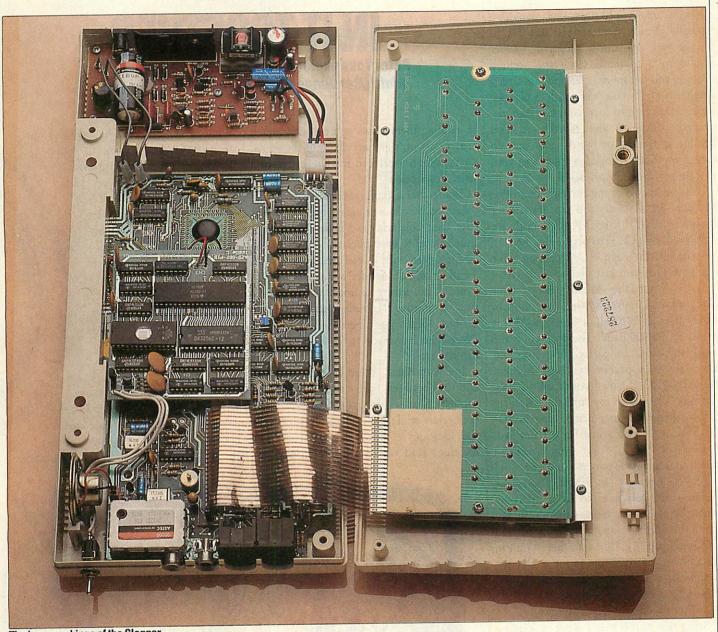

The inner workings of the Slogger

with Electron games now outselling BBC micro versions, most high quality BBC micro games have an Electron version, with the two often on a back-to-back tape, so who needs BBC micro games?

Those who hope the Turbo will give their Electron games a new lease of life can also expect only limited success. Some games seem unaffected by the Turbo mode (Electron Chukkie Egg, Frak! and Citadel), some won't load in this mode (Thunderstruck, Felix in the Factory and Last of the Free), some are just that bit faster (Star Striker, Repton 2 plus several adventure games), while some run ridiculously faster (Hopper, Snapper, Overdrive and Mr Wiz). The modest speed increases generally improve the games, particularly in the case of

the adventures, where pictures are drawn very much quicker, and commands are interpreted a great deal faster.

For the games which run at Turbo speed, it's a matter of personal choice. High speed *Snapper*, for example, has gone down very well in our house, especially with Fred, our resident *Snapper* addict, but on the whole, I feel most arcade games reach impossible levels pretty quickly, with slow initial speeds being a function of the game design, rather than a reflection of the machine's poor processing speed.

3) Normal Mode: Here the Electron behaves as a standard machine, and will be used by me for most games, while I'll stay in Shadow for serious and home-made software, and use Turbo for adventure games and playing high speed Snapper.

The Slogger Master RAM Board delivers the extra speed and memory its publicity promises, but has the drawback of nonstandard facilities.

If you need more memory for writing programs to use on your own machine, or for text files, or want to see your programs run at BBC micro speed, you may consider this a sound investment, but if your interest is in games, I'd think carefully before buying – I suspect the novelty of Turbo Snapper will soon wear off.

The Slogger Master RAM board costs £64.95 inclusive of VAT installed by Slogger or as a kit without the 6502 processor for £54.95. Contact Slogger Ltd, 107 Richmond Rd, Gillingham, Kent ME7 1BR

REVIEWS

IN IT TOGETHER

Peter Voke explores two multi user adventures, The Multi User Dungeon (MUD) and Micronet's Shades

One of the latest games trends to absorb home computer users is the multi user adventure (MUA).

If you are an adventure fan you have probably already tried at least one MUA. It's the type of game where you wander around in a mythical landscape seeking treasure and weapons, fighting monsters, dragons and, if you wish, other players, while attempting to increase your stamina, strength, dexterity and score until you become a wizard or witch and can do almost anything. If the idea appeals to you, you simply must try an MUA.

I looked at two of the current favourites: Micronet 800's Shades and the Multi User Dungeon (MUD) from MUSE - both are supported by BT. To play, you need a modem and the right ROM chip in your machine; then you just dial up and start.

To try out the MUSE Multi User Dungeon, dial 01-998 8899 if your modem works at 1200/75 baud, or 01-997 9433 if it works at 300/300 baud. The protocol is the usual eight-bit, no parity, one stop bit. There is also a packet switching address, A21880100300, if you have access to PSS. Activate the log-in by pressing Return. When asked for a user name, type MUD-GUEST, and when asked for a password, type PROSPECT. After some news a menu appears; item two is the game.

Shades operates in Prestel off-peak periods, and you have to be a Micronet subscriber, so it is more difficult to try without spending money. Shades is entered on Prestel page 81188. From there you can enter the game, read up about it and the commands available, or mail other players. Playing costs 1.6p per minute, so 10 minutes' trial would be less than 20p.

Being new to MUAs, I went in looking for the same things I admire in ordinary single user adventures: things like atmosphere, coherence, good game structure, and so on. There is a great deal more to an MUA than to a traditional adventure, and MUAs really have to be judged on different grounds.


But, let's take atmosphere first: MUSE's MUD is definitely better than Shades here, although atmosphere is difficult to define. If you thought Acornsoft's Sphinx Adventure was as good as their Gateway to Karos, for instance, then you certainly have no feel at all for atmosphere! MUD has a cold, Nordic feel about it, with gigantic mountains towering up to the south and east of the land. Part of MUD's strength is the quality of the descriptions of each location, which are excellent. The trouble is, reading them slows you down so much that you won't get anywhere in the game, so you soon switch to the alternative of a brief description.

Shades has a more amateurish feel. The locations vary more quickly but they don't lose their coherence, so in fact I found it much easier to keep track of where I was in Shades, even with a brief description, than I did in MUD. Shades has a more lighthearted, fun-loving approach. It is a teddybear adventure. MUD manages to be rather serious, until you meet some practical joker who has made it to Warlock: then the fun starts!

For coherence, there is not much to choose between the two adventures, though Shades manages to stay wellconnected while having greater variety in the locations. Far too many of MUD's locations read very much like an adjacent

Much of my time in the game and out of it was spent talking to other players to get their impressions. To summarise, novices and guests don't much like MUD. They can't find any treasure, don't know what to do, and spend their time waiting for the next reset (more about resets below) or chatting to each other in the bar. Typical answers to enquiries included phrases like 'bored' or where's all the T?'.

Shades is more exciting for a beginner. Maybe I got a particularly favourable impression because a kind-hearted enchantress showed me how to get over the river to the ruined city in my first game.

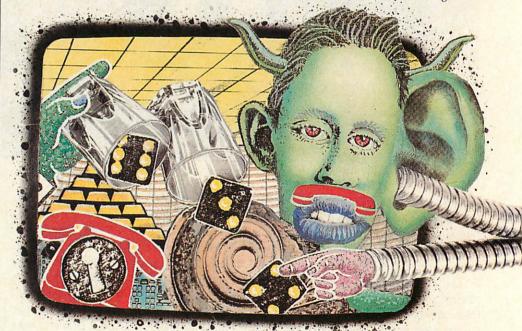

one, which must surely be a fault.

On the game structure, Shades is better for the less experienced adventurer, who wants plenty of fun at the lower levels.

For the novice beginner, MUD can be frustrating. I spent all my reviewing time as a novice (naturally enough), though I am now well on the way to the next level.

This brings us to the real issue that makes MUAs so much better than traditional single-user adventures, but which also causes their problems: the other players. No hatchet-chucking dwarf controlled by pseudo-random numbers can be as original, intelligent, helpful, frustrating, useful, fun, maddening, competitive, friendly, or



dangerous as another human player. A multi user adventure is a million games, not one, because no session is ever the same as the last.

Remember that feeling in single user adventures when you were starting on the last run through, having finally

understood why you actually needed the rusty nail from ())), the quarry after all?

You collect the nail,
and then spend
the next three
hours running
right through
the adventure.
Boring, because you have
seen it all too
many times before, but satisfying
because you are so
competent and you are
about to solve the final

ultimate puzzle. That never happens in a multi-user adventure. Next time you log in, the nail won't be there because somebody else has it. This doesn't spoil an MUA because it is designed to have many puzzles than can be tackled simultaneously by many players: it has a tree structure instead of being linear. You have to be an opportunist, grab what there is going and make the most of it. You won't like MUAs if you are one of those arcade players studied by certain psychologists, who found refuge in video games because they could 'control them' but couldn't cope with the Big Game outside the arcade. An

MUA has everything from a single user adventure and much, much more. The game is just a fake setting in which to interact with other people in a limited and (it is hoped) enjoyable way. You could say the same about every team sport, not to mention bridge, youth hostelling, pub crawls and Mediterranean cruises. Adventurers, in other words, have joined the rest of the human race and are doing it together. You can talk to other players, help them, follow them about, attack them, steal things from them, cast spells on them (if up to it) and even, in MUD, do daft things like tickle them.

But the other players are also the problem in MUAs. Not when they are bolshy or aggressive: that is part of the game. But because they are collecting treasures and weapons, killing gremlins and so on, the game 'runs down'. In MUD, treasures are dumped in a swamp to get points, while Shades has a much more original place to take your treasures which nevertheless still removes them from the action. As a result, after an hour or so, there is nothing much left to do.

To overcome this problem, both MUAs reset at regular intervals. A reset puts the game back into its original state, with the treasures, weapons and monsters in various more or less predictable locations. This is standard practice, but I'm afraid I don't like it. Resets are false, have nothing to do with the game, and are imposed from outside. They are the multi user equivalent of starting again.

There are two things wrong with resets. First, because everybody is restarting the adventure simultaneously, experienced

players who know their way around mop up the useful items rapidly, leaving almost nothing for novices or guests to stumble on even five minutes later.

Shades is much better at coping with this than MUD, since there are eight games of Shades running on each Prestel computer simultaneously, with a limit of up to eight players in each game. There is also (I think) more accessible treasure in Shades, so you usually find something to collect.

MUD is definitely worse in this respect – hence the complaints about boredom, and mass exits from the game shortly before resets, with all players gathering to moan in the saloon bar! Second, at reset there is a mad rush to get back into the game (worse in MUD if there are more than eight players) which completely wrecks the atmosphere.

The MUD literature does tell you about these problems, but almost makes them out to be virtues, like the daft suggestion that crashes should be 'used to your advantage'. The fact that something like the reset rush hour has become a tradition does not make it a virtue; Shades is definitely better because the problem is not so bad.

These two MUAs are both first generation, based on the original Essex University MUD. The next generation of adventures will, or should, deal with the reset problem in a much more effective and subtle way, by a policy of continuous reset. The idea is that many common items needed by several players at the same time should be available in large numbers.

Other items, such as those crucial to solving the most difficult problems, there should be only one of, but should be reset continuously if the player does not make use of them. Such an item should be taken from the player and replaced in its original location if the player does not use it at all in any period of five minutes, does not use it for its intended purpose within half an hour of finding it, or disposes of it by dropping it down the volcano or into the sea, or if the player quits. The precise mechanism for resetting items should depend on the type of game.

Unfortunately such things are still in the future. Other aspects of both games are also not yet implemented, though planned. *MUD* has a large number of locations (there are many hundreds, about 40 per cent of which are underground), although MUSE says that it is constantly being extended and improved. The main thing that is missing is 'mobiles' – semi-intelligent entities controlled by the com-

Reach For The Sky

with GLIDER PILOT 2, our comprehensive flight simulator. Features cable launch, thermals, cross country with map and practice option. Extensively machine coded for quick response. Instruction booklet.

With full instrumentation and "solid" colour perspective graphics, this is not a game but an accurate and challenging simulation. Keys or potentiometer joystick. Find the thermals and soar!!

FREE to disc users - "NOTEBOOK" - an easy to use memopad utility. Use it as a flight log for Glider Pilot 2! B, B+ and MASTER.

Cassette £7.95, 51/4" Disc £8.95, 3" Disc £11.50.

APEX Software, Station Road, Penshaw, Tyne & Wear DH4 7PE. Tel: Durham (0385) 853091.

Design your own

PCB

with the

BBC COMPUTER

Lay out double sided PCB on the screen, separating the layers by colour. Store design on disc, recall for editing or plot it on an Epson HI-80. A-4 plotter ready for 2:1 photo reduction. 40 or 80 Trac disc based software £20.

VINDEREN ASSOCIATES, PO BOX 130, BELFAST BT9 6NB. TEL: 0232 667885

THE MASTER

WEST WALES MASTER 128 COMPUTER

MASTER COMPACT RANGE and

everything for the BBC-B Micro and Electron User including

MONITORS—PRINTERS—DISC DRIVES— UPGRADES-DISKS-PAPER-RIBBONS-BOOKS-MICE-PLOTTERS-ROBOTICS-MODEMS—ROMS—MIDI—CASIO SYNTHS-STEPPER MOTORS—DISC STORAGE BOXES.

- Plus software old and new for business, education and leisure. *
- * BBC upgrades, spares, and after sales service * with products for electron owners too. *

BBC stockist since Acorn split the Atom. *

* Amstrad PCW & PC etc *

* If you live in Dyfed, give us a call *

Access & Visa welcome

Cardigan Electronics, Chancery Lane, Cardigan Dyfed. Tel 0239 614483

Shop hours Mon-Sat 10am – 5pm Closed all day every Wednesday

I C E - B O X The utility

★ for Sideways RAM ★

- transfers nearly all tape software to disc
- "save game" to disc at any point freeze game, slow motion, single step at any point
- swap between concurrent activities
- change O.S. functions while programme running
- allows screen dumps without affecting current program
- works with any DFS or DDFS
- comprehensive user guide

Requires: BBC/B with O.S. 120 disc drive and 16k sideways

Supplied on disc in 40/80 track compatible format

Orders to: EVENT ONE LTD. PO BOX 17 Malvern, Worcs., **WR14 1PP**

Price. £18 (inc vat, p&p)

The USER FRIENDLY INTERFACE and DISC ORGANISING KIT for the BBC

"an honest-to goodness bargain" ...

... "will repay its small cost a hundredfold." (Viewfax - Tubelink)

Keep discs organised with easy to install menus, allowing you to document the entries at 3 levels of detail. Customise for colour, ROM selection etc. Works on model B, B+ 64k, Master with Acorn or Watford DFS (displays up to 61 entries). Compatible with 6502 second processor

Send £6.95 for disc (state 40 or 80 track) and manual.

Stortsoft

2 Hillfields, Chelmsford Road Hatfield Heath, BISHOPS STORTFORD Herts. CM22 7AX Tel. 8279 738598

MASS DATA STORAGE - The Complete Solution

With more experience than any other company in the provision of hard disc storage for BBC users, Amcom can supply a range of ADFS compatible winchester drives, second to none.

With storage capacities of up to 600 megabytes, Amcom winchesters are designed for use in demanding environments like schools, colleges, and universities as well as for industrial applications.

Connection of an Amcom winchester couldn't be simpler as it connects directly to the 1MHz bus socket of the computer by a 34-way cable. Plug in, switch on, and that's all there is to it.

Used in conjunction with or to replace conventional floppy disc drives, Amcom hard disc systems are totally compatible with all ADFS software as well as the BBC Master Series



Amcom for the complete mass storage solution



For further information on: Winchester hard discs, Educational networking systems or Tapestreamers, contact:

Amcom Software Ltd. 35 Carters Lane, Kiln Farm, Milton Keynes MK11 3HL. Telephone (0908) 569212

REVIEWS

SOFTWARE

A LA CARTE

Menu Master, says Benjamin Rietti, is worth more than its small cost

puter. There are a few, but they aren't yet very good.

Shades has more impressive mobiles, but there are lots of indications of construction work in progress on the layout. You come to parts sealed off by mysterious grey walls with computer printout messages stuck to them - or more gruesome indications that somebody hasn't finished the programming on time. I found little of Shades underground, but so far I have explored only a fraction of the 16,000 rooms it has, or is intended to have. Shades has neat touches like the 'information cavern', close to where you enter the adventure, and there is an adventure chatline outside the adventure, in Micronet 800, that corresponds roughly to MUSE's saloon bar.

When you join MUD you get a lovely but not very detailed map of 'The Land', and a booklet telling you what you need to know to get started. The first location is odd, and unlike any other in MUD, so don't be put off by it. There is a little tripwire problem you have to solve to get out of it and into the game proper, but that should only take a moment to figure out.

Choosing between the two is difficult. If you already have a Micronet account, then Shades will be an obvious first choice. Almost everyone I spoke to in MUD played Shades, though the converse was not the case. If for some reason you have a modem but not a Prestel/Micronet account, then MUD could be cheaper (£1 to £2 per hour compared to 96p per hour on top of the annual £66 fee).

Calls to Prestel computers are always local calls, while the MUSE computer is in London and will only be local for you if you live in the right area. For me, calling from a home county, phone charges to MUD were more than three times the price of those to Prestel.

If you are new to multi-user adventures, go for *Shades*. You only pay for what you play, and access to Micronet is useful for many other things. Once you have mastered *Shades*, the dizzy heights of *MUD* Wizardhood still beckon.

To subscribe to MUD, write to MUSE at 6 Albermarle Way, London EC1V 4JB. Each hour's play on MUD cost £2, with reductions of up to 50 per cent for bulk purchase of credits. To subscribe, get your own Micronet account from Micronet 800 at 8 Herbal Hill, London EC1R 5EJ. A year's subscription is £66.

Menu Master is one of those rare programs whose value far exceeds its cost. It's a real asset to disc users, removing the nightmare of having to amend menus each time a new title is added to the catalogue, and contains




Figure 1. Menu Master's main screen

a wealth of disc system routines.

Menu Master is totally at home with the BBC B (OS 1.0 or later), B+ or Master, is compatible with the 6502 second processor, Acorn DFS, Watford's 62 file DFS, and ACP's Advanced 1770 DFS. The disc supplied is not protected, but each is coded with the purchaser's name and address.

The heart of the utility's automatic menu generation is held in the use of directory letters (see figure 1):

A for Basic programs which will simply be chained from the default page location.

B will run a Basic program which needs to be shifted down in memory.

D to load and list, in page mode, a program in Basic.

X which *RUNs a file.

Z as X, but with the neat trick that if the machine code needs to be run from disc filing system workspace, it will be *LOADed to PAGE, moved down, and the appropriate call made.

L *LOADs machine code.

E will *EXECute text.

T displays a spooled text file.

7 is used to display a mode 7 screen.

G for general loading of code.

The menu program works across however

many drives you have, and a useful facility is the ability to give some positive information about any file in the menu: you may list the first line of a Basic program (eg, to see a useful REM statement), or even dump the first 256 bytes.

Pressing Tab at any stage of the menu's operation will give a printout of the information on screen.

Added to *Menu Master's* nuts and bolts operation are a number of frills. You can define certain paramaters which will affect the current disc. For instance, it is possible to specify whether or not the second processor is turned on or off from booting up, and to keep control of the ROM chips in your machine, turning some on or off as




Figure 2. Programs available on Menu Master

you require. Helpfully, if you stipulate a ROM's presence and *Menu Master* doesn't find it, it will try and *LOAD it from disc to sideways RAM – how much more help could you want?

The only snag with the program is that by its nature it takes up valuable space on each disc, so 40 track users beware.

Also you do need to learn good habits in assigning directory letters appropriate to your files. The manual, although more than adequate, reflects the budget price. But at £6.95 you get value and a program to save time and effort.

Menu Master costs £6.95 on disc from Stortsoft, 2 Hillfields, Chelmsford Road, Hatfield Heath, Bishops Stortford.

EPROMS, 8271

	Ex VAT	In VAT
1-9 27128 250nS	2.57	2.95
10+27128 250nS	2.30	2.65
1-9 2764 250nS	2.26	2.60
10+2764 250nS	2.00	2.30
1-9 27256 250nS	4.57	5.25
10+27256 250nS	4.13	4.75
1-9 TTL/Cmos set	4.77	5.49
1-9 8271 controller.	30.43	35.00
10+8271 controller.	29.00	33.35
1-9 6264LP 150nS .	2.56	2.95
10+6265LP 150nS	2 30	2.65

ROMS/ **UPGRADES**

	Ex VAT	Inc VAT
Inter-Word	37.39	43.00
Inter-Sheet	36.52	42.00
Inter-Chart	24.35	28.00
Wordwise Plus	37.39	43.00
Spell Master	40.87	47.00
View 2.1	36.52	42.00
View 3.0	55.65	64.00
ViewStore	36.52	42.00
ViewSpell	30.39	34.95
AMX Max	16.09	18.50
Acorn 1770 DFS	42.61	49.00
Acorn 8271 DFS	41.74	48.00
B Plus 64K to 128K	26.00	29.90

DISC DRIVES

	Ex VAT	Inc VAT
Cumana CSX100	91.30	105.00
Cumana CSX400	124 35	143.00
Cumana CSX351 3.5" 4OT	42 61	49.00
Cumana CD800S	252 17	290.00
MD400A 400K No PSU	101.74	117.00
MD400B 400K & PSU	116.52	134.00
MD802C 800K No PSU	190.43	219.00
MD802E 800K & PSU	216 52	
MD802D 800K PSU & Stand	247.02	249.00
Acorn Dual 800K & Stand	247.83	285.00
Acom buai book a Stand	247.83	285.00

SPECIAL **OFFER**

Altair ROM/RAM board with battery backup half price only £39.00 inc VAT

DISKETTES (lifetime warranty)

Exc VAT	Inc VAT
13.90	15.99
7.39	8.50
6.52	7.50
	Exc VAT 13.90 7.39 6.52

MONITORS

	Ex VAT	Inc vAT
Philips CM8533	239.13	275.00
Philips CM8501	146 96	169.00
Philips BM7502	68 70	79.00
Philips BM7522	73.91	85.00
Acorn ADF 32	212 17	244.00
Taxan KX1201 P31	84.35	97.00
Taxan KX1202 P39	91.30	105.00
Taxan KX1203 Amber	93 04	107.00
Taxan Sup. Vision 2	260.00	299.00
Microvitec 1451 ms	223.48	257.00
(Prices inc. Bl	BC Cable)	207.00

MASTER/ COMPACT

	Ex VAT	Inc VAT
Master 128K Micro	.373.04	429.00
Master ET 128K Micro	.338.00	388.70
512 co-processor	.185.00	212.75
Turbo Upgrade	98.78	113.50
Acorn Cartridges	10.87	12.50
Reference Manuals	14.50	14.50
View 3 User Guide	9.00	9.00
View Sheet User Guide	9.00	9.00
Master & BBC Dust Covers	s 3.00	3.45
Colour Compact	543.48	625.00
Printer Buffer software	4.30	4.95
Compact 51/4" upgrade	13.00	14.95
Second user BBC Bs available	ilable	14.00

Panasonic KXP 1080



with BBC cable & paper £169.00 (£146.96 + VAT)

Exc VAT	Inc VAT
KXP1080 Fabric ink ribbon 3.00	3.45
KXP1080 View Printer driver 8.65	9.95
KXP1080 Control Dump rom 13.00	14.95

CANON PW1080A

with BBC cable & paper

£239.00 (£207.83+VAT)

JUKI 6100

with BBC cable & paper £259.00 (£225.22+VAT)

EPSON LX86 with BBC cable & paper

£232.00 (£201.74+VAT)

PRINTER ADDONS

	Ex VAT	Inc VAT
LX Tractor Unit		22.95
LX Sheet Feeder	47.83	55.00
LX Print Ribbon	3.00	3.45
NL-10 Sheet Feeder	47.83	55.00
NL-10 Print Ribbon		5.52
KP/PW Print Ribbon		3.90
Juki 6100 Dust Cover		6.44
Printer Dust Covers from.	4.00	4.60

KAGA/TAXAN KP810

with BBC cable & paper £239.00 (£207.83+VAT)

CITIZEN 120D

with BBC cable & paper £175.00 (£152.17+VAT)

STAR NL10

with BBC cable & paper £229.00 (£199.13+VAT)

PRINTERS/CABLES

	Ex VAT	Inc VAT
Kaga/Taxan KP815	239.13	275.00
Kaga/Taxan KP910	338.26	389.00
Epson FX800	320.87	369.00
Epson FX1000	425.22	489.00
Juki 2200 D/W	225.22	259.00
MP165	173.04	199.00
1.2m (4foot) BBC cable.	6.00	6.90
2.0m (6foot) BBC cable.	7.78	8.95
Compact cable (printer).	8.65	9.95

Phone for our best price before placing your order EDUCATIONAL & GOVERNMENT ORDERS WELCOME All products have a 12 month no quibble guarantee Prices subject to variation without prior notification

We are closed to callers all day

Wednesday & some Saturday afternoons Carriage 92p (80p+VAT) Securicor £6.90 (£6.00+VAT)





Acorn Dept. 128 West Street, Portchester, Hants. P016 9XE. Tel: 0705 325354



RESPONSIVE—ACCURATE—INEXPENSIVE

A new Interactive Tape Control System from The Soft Option.

This new concept in Interactive Videotape Systems will support a wide range of industrial and domestic tapeplayers: VHS, Betamax and U-Matic formats.

Directly controllable from BASIC, MICROTEXT and other Acornsoft languages - not limited to the constraints of a specific software system.

Authoring and design couldn't be easier using the full graphics and text overlay support system operating in any Acorn screen mode.

Supplied complete and ready for work as an integrated system, or as a Control Unit for use with your existing hardware. Maintenance options available.

Full details available from:

The Soft Option Limited,

Osbourne House, Lower Teddington Road, Hampton Wick, Middlesex KT1 4ER.

Telephone: 01-977 7670

EURO TEXT & COMMUNICATIONS EDITOR the all-in-one text editor

Provides editing, printout and communications facilities all integrated in a single easy to use program. Plus extended character set for foreign languages or symbols, fast file search for mailmerging or vocabulary searches, and comprehensive printer routines giving close control over printout.

- * Full wysiwyg screen editing in 80 col. mode typically with max. 3950 chars. current text.
- * Built-in communications for scrolling data bases (e.g. TGOLD) or user to user.
- File search and incorporate routine (search speed 1000 chars. per sec.)
- Insertion of printer codes anywhere on a line.
- Printout on any daisy or matrix printer (Epson compatible matrix printer required for full range of user defined characters).
- Pause during printout, enter text or codes directly from keyboard, or abort printout.
- * In 16K ROM for BBC B with DFS.

A truly functional tool for text and message handling



EDINBURGH TRANSLATIONS LTD.

14 Stafford Street, Edinburgh EH3 7AU Tel. 031-225 8965

BUSINESS:


JACK OF ALL TRADES

Roger Carus surveys the uses of BBC micros in business, looking for new ideas

With so many BBC micros around - over a million of the whole range - the uses being made of them are enormously varied and many owners have thought up ideas to help them at work or play.

Some ingenious people have created small businesses around what started as a hobby. Recently I heard of a retired man in Surrey who is starting to market a collection of programs for use by churches, a mixture of record keeping software and games for church fêtes. And he is writing them all himself.

At the other extreme, large businesses have organised their office systems around the equipment. It is well known that the Acorn User editorial office itself and Redwood Publishing's other magazines are entirely built around BBC micro systems,



A cat-choosing program has been written

and it comes as something of a surprise to find that there is not a typewriter to be seen there. A network with printer servers covers the needs of all the 60-odd staff.

Occasional users

Between these extremes there are many experienced professional writers and journalists, including occasional ones like myself, who do their composition directly on the micro using a wordprocessor. Many students who learned the skill at school find their essays easier to improve and more legible when prepared in this way. There are the obvious school uses for marks, registers and timetables as well as have been written for special purposes,

staff lists and teaching aids. Acorn User's own Education Disc is exceptionally useful; recently I visited Southgate Technical College and saw the directions for visitors on a screen above the reception desk using the Eco-fax Teletext Emulator which is ideal for the purpose and would be good value itself even if there were not so many other useful programs on the disc.

Small and large

I have identified many home-based small businesses, often in the microcomputing or related fields, which use them to keep all the records, while larger businesses find them good for stock control.

At various times I have used or seen advertised programs for bookmakers to settle their bets, for dentists to record appointments and keep fees, and farmers to monitor use of foodstuffs. I even tried using one of the systems to help with my entries for the football pools, but decided it was such hard work that I would use a random number generator and I'm still not a millionaire.

Research

Compared with such simple uses the research possibilities are enormous. When reviewing the University of Reading's Instat package for statistics, a list of users was attached and I was astonished to see the range of laboratories using a BBC micro for major research.

Most users I know make use of programs bought 'off the peg', but a few have written their own or adapted others. I did this myself with one designed to choose a pedigree cat. All you do is answer questions about its colour, shape and temperament and it tells you which of 28 varieties you should think about.

It is quite common for instruction manuals, and not only for computerrelated products, to be kept on a wordprocessor which allows them to be updated quickly and easily.

By contrast, a few pieces of software

ECO-FAX TELETEXT EMULATOR
(c) Joe Telford 1984.
ECO-FAK1
ECO-ED2
END3
Which?

Generating promotional displays

usually where someone with the necessary skills was faced with a problem at work and saw a solution using a computer - if the software existed. Peter Sandford's colour fill and shading routines published in Acorn User, for example, were developed for his work as a surveyor but can also be used at other levels.

Acorn User would like to hear from you if you have made use of the BBC micro in any way which might interest other readers and will report from time to time with a selection of responses.

IDEAS WANTED

If you make use of your micro for business or pleasure, or have written a piece of useful software, and would like to share your knowledge and experience with other readers, please write to me.

Send a very brief letter to the address below, with a description and giving your name, address and telephone number (if possible) along with the best time(s) in the week to contact you. I will acknowledge all letters and follow up the most promising ones. The best will be written up in Acorn User, only giving confidential information with your permission.

Write to Roger Carus, c/o Acorn User, Redwood Publishing, 141-143 Drury Lane, London WC2B 5TF. Or use British Telecom Gold: 81:RED001.

ADVANCED TECHNOLOGICAL RESEARCH

Data Protection Act

How Safe is Your System and its Data. What is the Solution?

LOCK-TIGHT the CYPHER CONTROL SYSTEM

Lock-Tight protects both Data and Software, without any changes being made to existing Programs or the Operating System. Available for most computer systems used in Education and Industry. Lock-Tight offers both Software Producers and End-Users operational control over their Data and Programs, whether Single, Multi-User or Networked Environments. Does not restrict the User. Complies with Data Protection Act. Versions for:

ACORN BBC-A/B/B+ Compact and Master, IBM PC-DOS, MS-DOS. Lock-Tight can be supplied for any other Operating System, and/or Micro-Mini computer system required.

ADVANCED TECHNOLOGICAL RESEARCH

508 KINGSBURY ROAD, KINGSBURY, LONDON NW9 9HE, ENGLAND

Telephone 01-206 1529

Telex 8953931

SNOWFAX Ltd trading as ADVANCED TECHNOLOGICAL RESEARCH (C) 1986

IBM is the registered trademark of International Business Machines Corp. ACORN is the registered trademark of ACORN Computers Limited

-contex

computing:

BANK MANAGER

for disc systems only

The most advanced and versatile personal bank account management program available for all BBC computers. Consistently acclaimed!

"data entry is a delight... professional... excellent product" Micro User April 86

"data entry is a delight... professional... excellent product." Micro User April 80
Enter cheques and receipts. Standing orders any frequency. Automatic date sequencing.
Reconcile statements. Search, amend and delete. Unreconcile. Move forwards or backwards.
Analyse expenditure. Forward cash flow forecast. Up to 36 simultaneous 'bank' (bank, credit cards, savings, cash) accounts online simultaneously, inter-account transfers, 9999 standing orders, 99 analysis categories, 12 actual and 12 budgets per category, over 4,000 postings on an 80tk disc. Reports to screen or printer. Graphics. Foreign currency support. Password. File recovery. Auto exec file. Field editing. Itemised look ahead. Programmable report writer.

Standard Bank Manager for the BBC B, B+ £17.50

BANK MANAGER MASTER for disc systems only

Version 2 now available. Includes all of the facilities of the Standard Bank Manager plus ADFS file system support, shadow screens, uses sideways RAM, 40 or 80 column screen reports, improved graphics, m/c windows, function key support and onscreen labels, additional functions added to the already extensive report facilities.

Bank Manager Master for the MASTER and MASTER COMPACT £22.50 Upgrade from standard, return original disc and £6.00

BANK MANAGER BUSINESS UTILITIES for disc systems only

For the 'professional' who also use the BANK MANAGER to control the business accounts the BUSINESS UTILITIES add double entry trial balance and programmable spreadsheet analysis reports. Generated from cheque and cash transactions keyed into BANK MANAGER. Just pass the reports to your accountant! Use with either standard or master/compact version.

Bank Manager Business Utility Pack 1 £12.00

TYPING TUTOR

Quickly learn to touch type. Over 90 smoothly graded lessons graduate you from the basic home keys to complete keyboard mastery. Unique word scan line checking. Target WPM and percentage correct. You may revise the targets or lessons as required. Audio key click for positive key depression. Establish a typing rhythm using the automatic metronome. Free format option. Recommended.

for BBC B, B+, Master and Compact; Cassette £9.50, Disc £12.50

ALL PRICES FULLY INCLUSIVE. FREE POSTAGE WITHIN UK


CONTEX COMPUTING 15 Woodlands Close, Cople, Bedford MK44 3UE

Please rush me. □40tk □80tk □3.5" □51/4" I have a BBC: B B+ Master Compact. Enclosed £ or debit my Access card no. ...

AU4

KENPAD

18-Key DEC VT100 STYLE KEYPAD FOR TERMULATOR ROM. A SOURCE PROVIDED FOR OTHER USES WORKSTATION ROM PATCH AVAILABLE. CHECKOUT THE NEW MASTER TERMULATOR



KENPAD matches the on-line HELP facilities and documentation of DEC VAX VMS 4.2. KENPAD has transparent legendable keytops and requires a BBC B/B+ with TERMULATOR. KENPAD has been supplied to Industry, Education, MRC, SERC, NERC, MoD etc. PRICE: £65.00 inc. Contact for quantity or Educational Prices. Please send cheque with order, allowing up to 28 days for delivery.

K.C.BLANSHARD, 55 SOUTHWAY, BURGESS HILL, SUSSEX, RH15 9SY

(Tel 04446 41290)

BALANCE YOUR BOOKS

MICROLEDGER

(For BBC micros - model B or better)

A general ledger program designed by a Chartered Accountant for maximum yersatility and ease of use. Ideal for small businesses, schools, clubs, etc., of just for household accounts. Features include:

"Double-entry" bookkeeping.

Up to 99 general ledger accounts — all account names user-specified.

- ☼ Up to 99 general ledger accounts all account names user-specified
 ☼ Up to 500 entries per accounting period.
 ☼ Excellent budgeting capability.
 ☆ Comprehensive output reports, including Income and Expenditure Account, Balance Sheet, Funds Flow Statement. Current period and year-to-date reporting; actual/budget comparisons. Full audit trail.
 ☆ Menu-driven, plus on-screen prompt messages.
 ☆ 29 page, comprehensive manual.

MicroLedger is supplied on 40 track 51/4" disk or on tape cassette for conversion to other disk media. It is unrivalled value at £16.50 (incl. p&p) for disk or tape — specify which is required. Send P.O. or cheque to 1xchel Software, 16 Meredyth Road, London SW13 0DY; or ring 01-876-9732 for a free fact sheet.

REVIEWS

SOFTWARE

GOOD AND FAITHFUL HOTEL SERVANT

The Hotel Servant is a thorough, well designed and economical management package, finds Roger Carus

Anyone who runs a hotel or boarding house, or teaches hotel receptionists, should think seriously about this very useful software package. It has been carefully developed by someone who really knows his business.

Clifford Springer, who produced *The Hotel Servant*, belongs to a family of hoteliers and knows all too well the problems of keeping track of customers, their spending and most important of all the forward room bookings which make for profit or loss in the trade.

The package is most suitable for a licensed hotel and restaurant with up to about 80 rooms. It could cope with a larger establishment using more memory and storage, but there are probably better and more expensive systems at that level.

Cost

The hardware needed is any version of the BBC micro or Master with double sided twin disc drives (for convenience) having about 800k capacity, a colour monitor (for preference, as the system uses colour graphics) and an Epson compatible printer, costing in all around £1250.

Although clearly a bookings system rather than an accounting package, it does provide some useful financial help such as printing personalised and detailed bills for the guests.

Set up

The first thing it does is record the current provisional and confirmed forward room reservations for up to a year in advance, showing which rooms are free for easy scanning and the state of all such bookings. A single screen displays the room number, arrival and departure plans, number of occupants, name, address and nationality, and records any deposit which has been paid by the customer.

The room list, which is easily adapted to any type of establishment, identifies the

OCUPANCY LIST

Room	: Arrival: Departur	e: Name.
THE PARTY OF THE P		
2		
- 1		
	07.09.87 19.09.87	
5		
	23.09.86 28.09.86	
The state of the s		
	19.10.86 26.10.86	
	23.09.86 30.09.86	
11	23.(/):05	
	23.09.86 26.09.86	
13		
	23.09.86 29.09.86	
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		

Occupancy is quickly and easily updated

types of room and how many of each are available for customers who want, say, a double bedded room with a view. At least 12 different room types are available, and once identified will probably never need any changing.

Once a booking is made, or changed as it so often is in the hotel trade, the system easily produces short standard personalised acknowledgement letters of the hotel's own design, and it opens a record file on the customer for any future reference.

Diary

The diary helps the last minute arrival to find a room immediately, and it also allows the most efficient use of rooms by fitting bookings together.

The restaurant section is equally attractive, with the facility to create quite long à



buy time switches, a burglar alarm, and enough wiring to make it all happen?













Red Boxes provide a home automation and security system that...

WORKS OFF YOUR MICRO

Announces an intruder

Starts the washing machine

NEEDS NO SPECIAL WIRING

Discourages the would-be burglar

Tells you when the baby's crying

IS SIMPLE TO INSTALL AND USE

Switches on the electric blanket

Wakes you for Breakfast Time

DOESN'T TIE UP YOUR COMPUTER

Turns on the dishwasher

Controls your heating

IS EASY TO PROGRAM

Turns on the light when you walk in

Puts the kettle on

GIVES YOU A NETWORKING FACILITY

Switches on Crossroads

Switches off Crossroads

AND COSTS JUST £129

With Red Boxes home automation becomes a reality at last. Programmed simply and easily via your micro*, Red Boxes use the mains wiring of your home to send signals which will control any appliance powered by a standard 13amp socket. That gives you control over your home environment – without wires trailing all over the place.

Home automation with Red Boxes also provides a sophisticated security system. At one level, it is an efficient burglar alarm which can detect and announce an intruder. At another level, you can make your house appear full of life when nobody's at home,

To: Flastronia Fulfilment Sarviage Chasterton Mill

simply by programming lights, television and radio to operate in your absence.

And if you have two micros, with Red Boxes you've got a local area network as well. It's a system that expands with your needs—and your imagination in home automation applications.

Most remarkable of all, the Red Boxes starter system costs only £129. And additional Red Boxes cost just £34.95. Get yours now, by clipping the coupon. Credit card holders can call 0480 87464

*The Red Boxes system will work off an Amstrad, BBC Micro, Commodore 64, IBM PC or Spectrum 48k/128k.

system. Please send me a Red Box starter system at £133 (including £4 p&p). My computer is a: BBC Micro Commodore 64 IBM PC PC Compatible Spectrum 48k/128k Name	project manuals at £9.95additional Red One control boxes at £36.95 each (including £2 p&p)additional Red Two infra red sensors at £36.95 each (including £2 p&p). □ I enclose my cheque for a total of £ made payable to General Information Systems Ltd., Readers' Account. □ Please charge a total of £to my Access/American Express card. Account number
Address	Postcode

REVIEWS

SOFTWARE



Detailed bills are easy

Date: C2 C3 C4 C5 C6 C7 C8	Occup Vacar Denter Enter Resta Funct Menu Forus	ancy I	guest accou till. counts er/edi nner	Time Time ciliti detail nts.	XXX ISTUR IO:O es
1	2	3	4	5	6
7	8	9	10	11	12
					-

The software's main options



Information on each occupant

THE CLIFF & ROSE

184 BADMINTON ROAD

DOWNEND

BRISTOL BS16 6NP

Tel. 0272 560013

Date 17.09.86

1 Prawn cocktail	0.95
2 Smoked salmon @ 2.30	4.60
1 Steak Diane	7.00
1 Beef Caserole	5.80
1 Grilled Lemon Sole	4.75
2 Strawberry Pavlova @ 1.40	2.80
1 Chocolate Mouse	1.35
2 Apple Pie @ 0.75	1.50
2 Lemonade @ 0.60	1.20
Sundries	0.90
Bar	5.66
Room no. 4 Total	36.51
Table no. 7	

Sign........

Thank you. Hope to see you again soon.

Restaurant menus and bills are also integrated

la carte menus with each item individually priced. Printing effects such as extended characters can be used to enhance the design. Any number of copies can be printed, showing the hotel heading. It can also be quickly amended.

Full bill

The itemised bill for food and drink consumed in the restaurant provides a very

satisfactory till roll record, which in turn links to the room number and, when signed by the visitor, is a very reliable record of the transaction.

The suite also produces records for special functions such as banquets and receptions with itemised invoices, and even provides some space for advertising.

At the end of the stay the Servant brings all the customer's transactions together in a

detailed bill, with each item showing the current VAT rate and the VAT number for the hotel clearly shown.

Mailshots

It also combines with Wordwise + to produce mailshots to previous customers who are automatically added to the establishment's mailing list.

The software is menu driven and easily learned and operated, although obviously it would take a little practice to get the best out of the system. It is generally of a highly professional standard in appearance and performance.

For the technical, it represents almost 200k of program and makes good use of overlays. It seems generally user friendly, and the use of colours is imaginative and satisfying. I spotted few very minor errors, such as spelling, and the only real bug has since been removed.


Value

The whole package is expensive on the face of it, but really quite cheap by comparison with the IBM Hotelier which would cost nearer £4000 including the hardware, or about three times as much. It does not need much knowledge or understanding of computers to operate and could easily recover the purchase cost in the first year by savings in time for the receptionist. It would of course represent a tax allowable expense and may well have other uses for the business, such as in accounting.

All in all a good business-like package: a pleasure to meet it.


The Hotel Servant for BBC micro and Master costs £175 from Avon Data Systems, 184 Badminton, Downend Road, Bristol, Avon, BS16 6NP

Could This Be You?

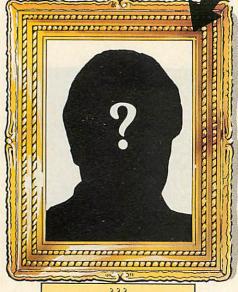

Programmer of the Year 1987

Expected Royalty £50000.00+ **Payments**

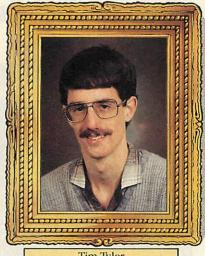

Tim Tyler Programmer of the Year 1986

Royalty Payments £41217.15



Peter Johnson Programmer of the Year 1985

Royalty Payments £36593.46

BBC Micro Software Top 10 January 12th 1987 Ravenskull Stryker's Run Micropower Magic Computer Hits 3 Micropower Winter Olympics. Beau Jolly 8. Commonwealth Games Tynesoft Karate Combat Superior Software Firebird Trivial Pursuit. opiled by Gallup Chart Services roduced by kind permission of Gallup) Domark

Telephone: 0532 459453.

Superior Software Ltd is unquestionably the leading software house for the BBC Micro and Electron — with chart-topping programs such as *Repton, Thrust, Stryker's Run, Citadel, Ravenskull* and *SPEECH!*

In addition, Repton 3 and SPEECH! have also been successful releases for the Commodore and Amstrad computers. Our authors have been successful too. Tim Tyler, a 17-year-old from Exeter, has so far earnt £41217.15 in royalties from sales of his Repton games; and Peter Johnson, the author of Overdrive and Deathstar, has now received £36593.46.

As part of our program of continued expansion, we are looking for top-class programmers of all home computers, including: Spectrum, Commodore 64/128, Amstrad 464/664/6128, Commodore 16/+4, Atari ST, Amstrad 1512 PC, Commodore Amiga, BBC Micro and Electron. We are also eager to contact games designers, graphics designers, and composers of computer music.

We have a string of major releases planned for 1987 including the new games: By Fair Means Or Foul, Nautilus and

Haunted House; we require conversions of these games to be written for all major home computers.

If you would like to be part of our continuing success story, please tell us about yourself by filling in the coupon below and sending it to us. We will immediately send you a free copy of our booklet "Success in Software" which is packed with hints, tips and advice for computer programmers.

Alternatively, Superior's Managing Director Richard Hanson is always available to speak to accomplished programmers; you can phone him on 0532 459453.

WHY SHOULD YOU CHOOSE SUPERIOR SOFT WARE TO PUBLISH YOUR PROGRAMS?

- Top Royalties Paid—
- Individual Service and Advice
- You Will Always get a Fair Deal
- We are a Medium-Sized Software House
- Our free booklet "Success in Software" tells you more about the Company and our exciting plans for the future.

Our authors are usually paid on a royalty basis, receiving 80p for every cassette or disc sold. The royalties are calculated and sent out promptly every three months. For exceptional programs, we will also consider making a downpayment on the royalties or an outright cash payment.

"I went with Superior Software because I knew that their Managing Director, Richard Hanson had already achieved some acclaim as a games programmer himself. When they published my game Overdrive it was a great success, and I've now earnt far more money from that program than from any of the other 16 programs which I've had published." ... Peter Johnson, author of Overdrive and Deathstar.

We always give individual attention to our programmers and their work.
"When I approached Superior Software with an early version of Ravenskull, I received a great deal of belp and advice on bow to improve
the game. I can quite definitely say that their prompt and decisive service transformed a mediocre game into a bigb quality arcadeadventure which subsequently topped the BBC and Electron charts."
... Martin Edmondson, co-author of Ravenskull.

Superior Software has built up a reputation for honest dealing and dependability. We are one of the few software houses that have been in business since the start of the home computer software boom in 1982.

"I've worked for other software companies and regrettably I bave to say that I feel I've been ripped off on most programs I've written. Last year I showed Superior Software my Sinbad game, and they made me an offer which was more than double the highest offers I'd been given elsewhere."

... Jason Benham, author of The Legend of Sinbad.

Being a medium-sized software house has its advantages for our programmers. We are large enough that we can afford to launch new software with expensive advertising campaigns and all the necessary razzamatazz. However, we are not so large that your program will get lost among a mass of new releases.


lost among a mass of new releases.

"I used to work for another software bouse, and I never got to speak to any of the directors nor anyone with any major influence within the company. At Superior Software, I deal directly with the Managing Director, Perhaps more importantly, just 6 weeks after the release of Stryker's Run I received my first royalty cheque which amounted to more than £5000. Whereas obtaining my royalties due from the other company was like getting blood out of a stone; it took several months of nagging and chasing before they paid me the money they owed Chris Roberts, author of Stryker's Run.

	REPLY COUPON FOR FREE BOOKLET "SUCCESS IN SOFTWARE"								
Name		q iyu		Major Programs Written or Under Development					
Name		***************************************			******		Title	Computer	Publishing Company
Address									

Phone			D	ate-of-Birth					
Thank minimum.				ate or birth initial					
Computers Owned ((Please tick appropriate				Interests (Please tick appropri	iate b	oxes)	Any other relevant infor	mation	
Spectrum		Amstrad 1512 PC		Arcade Games		Designing Graphics/			
Commodore 64/128		Atari ST		Strategic Games		Loading Screens			
Commodore 16/+4		BBC Micro		Utilities		Composing computer music			
Commodore Amiga		Electron		Business Programs		Other (please specify)		SUPERIOR	Dept. RC6. Regent House
Amstrad 464/664/612	3 🗆	Other (please specify)		Designing Games				SOFTWARE	Dept. RC6, Regent House, Skinner Lane, Leeds LS7 1AX.

CLIPBOARD GRAPHICS cutouts for the AMX PAGEMAKER

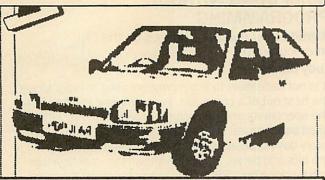

CLIPBOARD GRAPHICS LIBRARY

Clip-Pak 150 cutouts 80trk S/S 5-discs 40trk D/S 5-discs 40trk S/S 10-discs £10.00

or stamped addressed envelope for samples

VIDEPAK

Superb Graphics Screen Gallery compressed pictures on double sided 80trk discs 3 Disc VIDEPAK £10,00

PHOTO DIGITISING SERVICE

40trk s/s 4 pics £4.00: 80trk s/s 9 pics £6.00: 40trk d/s 8 pics £6.00: 80trk d/s 18 pics £10.00 State Graphic Mode (0, 1, 2)

MICRO-STUDIO UNIVERSAL 51/4 DISCS : PACK of 25 for £15

B3 Clay St. SOHAM Cambs CB7 5HL

M COMPUTER SERVICING

WE REPAIR - ON THE PREMISES - QUICK TURNROUND

★ AMSTRAD PC AND OPUS PC
 ★ BBC & ELECTRON (APPROVED SERVICE CENTRE)
 ★ COMMODORE & SPECTRUM
 ★ DISC DRIVES, PRINTERS, MONITORS
 ★ HARDWARE HIRE - MINIMUM 10 DAYS

MAIL ORDERS by phone Access and Visa Accepted

A Range of Hardware, Software, Joysticks, Leads, Interfaces Chips etc, and Computer Paper always in stock

CROYDON COMPUTER CENTRE

29 BRIGSTOCK ROAD, THORNTON HEATH, SURREY CR4 7JJ. Tel 01-683 2646

THIS NOTICE WORTH £5

AGAINST ANY PURCHASE OF HARDWARE OR SOFTWARE OVER £50

THE MOST VERSATILE LABEL-PRINTING PROGRAM

All your label-printing requirements available in one easy-to-use program. Message labels – hundred of uses for home and business, e.g. labelling samples, products, packaging, home-made wine etc., using a variety of print styles and sizes.

Address labels – create mailing lists and print them onto labels.

All formatting is done for you. Accepts label sizes 90×36 , 70×36 , 90×24 , 70×24 . Requires 80-column screen and Epson-compatible printer (address labels can also be printed on daisywheel). Single colour version £18.

Multi-colour version (for colour printer) £23.

Available on 40— or 80—track disc for all models of BBC (OS 1.2 onwards) including Master & Compact and also electron (DFF only). Please state model when ordering. Please add £1 for 3.5° discs.

BUFFER KITS FOR JUKI PRINTERS

Juki 6100 - 8k (requires simple soldering) Juki 5510 - 15k (no soldering required)

Fitted in minutes - full easy-to-follow instructions provided

Only £18

All prices include VAT and p&p

Calderdata, High Lee, Luddenden Foot, Halifax, HX2 6LB. Tel: 0422 885202

B+S COMPUTING (NOTT'M) LTD THE LENTON BUSINESS CENTRE LENTON BOULEVARD **NOTTINGHAM NG7 2BY**

BUSINESS SYSTEMS ☆ HARDWARE ☆ SOFTWARE VIDEO SYSTEMS ☆ MEDIA SUPPLIES OFFICIAL DOMESDAY DEALER

Telephone: 0602 787923 ACOI'N

approved dealer

ACORN PRODUCTS BBC MASTER COMPACT from £389 PHONE FOR SPECIAL PACKAGE OFFERS. CHOICE OF EITHER FREE SOFTWARE, DISCS, PLINTHS etc.

£399(a)
£320(a)
£99(c)
£195(a)
£11(e)
£26(e)
£30(d)
£324(a)
£182(a)
£41(d)
£25(e)

DOT MATDIV DDINTEDS

DOI WHITELE LILLIAND	
KAGA KP810 80col/150cps+27cps NLQ	£239(a
Mannesman Tally MT85 80col/180cps+45cps NLQ	£314(a
Epson LX86 80col/120cps+16cps NLO	£249(a
Juki 5510 80col/180cps+30cps NLQ	£249(a
Juki 5510 Colour Upgrade Kit	
Canon PW1080A 80col/150cps+27cps NLQ	£239(a
Citizen 120D 80col/120cps+25cps NLQ	£174(a
Citizen MSP20 80col/220cps+50cps NLQ (8k buffer)	£289(a

DAISY WHEEL PRINTERS

Juki 6100 20cm	OS	£244(a
MP Daisy Juni	or 14cps	£144(a
	MONITORS	
Philips BM750	2 High res mono green + sound	£69(a
Philips BM752	22 High res mono amber + sound .	£74(a
Philips CM85	33 Med Res colour RGB + compe	osite video
	sound (Green screen switchable)	
	rision III	
	d Res colour RGB/CV + sound	
Microvitec 14	31MS STD res colour RGB	£179(a
Microvitec 14	51MS Med res colour RGB	£224(a
	41MS High colour res RGB	
	TOUR AND ADDRESS OF THE PARTY O	

DISC DRIVES

Direct VPD0241 40/80T DS 400K	£99(a
Direct VPD0243 Dual 40/80T DS 800K (Horizontal)	£194(a
Direct VPD0246 40/80T DS 400K + PSU	£114(a
Direct VPD0248 Dual 40/80T DS 800K + PSU (Horizontal)	£214(a
Direct VPD0249 Dual 40/80T DS 800K + PSU on Master	Plinth
	£229(a
UFD MD802C Dual 40/80T DS 800K (Vertical)	£214(a
UFD MD802E Dual 40/80T DS 800K + PSU (Vertical)	£244(a
Direct Drives - Complete with a three years warran	nty

DISCS AND ACCESSORIES

3M 744 SS/DD 48TPI 5.25" (Box of 10)	£11(d
3M 745 DS/DD 48TPI 5.25" (Box of 10)	£13(d
3M 747 DS/DD 96TPI 5.25" (Box of 10)	£17(d
3M 35SS SS/DD 3.5" (Box of 10)	£23(d
3M 35DS DS/DD 3.5" (Box of 10)	£33(d
Lockable Library Cases 50 disc £8(c) 100	£10(c
B+S BRAND DS/DD 96TTI (CASE 10)	£13(d
MODEMS	and an extended the second

Miracle W52000 +			
Miracle WS2000 A	uto Dial Boards a	nd Auto Answer	Boards
			£28(d)
Minagle MICOOOO C			

	269(a)
Miracle WS4000 V2123 + BBC Lead£	144(a)
Miracle Databeeb Communications ROM	
Pace Comstar II ROM	
Pace Nightingale + Commstar + BBC Lead£	114(c)
Nightingale Auto Dial/Auto Answer Board and Software	
Pace Obbs Bulletin Board Software	
**** Please note: BABT approval on modems only **	**

FANFOLD PAPER AND LABELS

2000 × 1 Part 60gm 11" × 9.5" STD Perf	£11(c
1000 + 1 Part 85gm 11" × 9.5" Micro Perf	
1000 × 1 Part 90gm Perfect A4 Micro Perf	£13(c
1000 Labels 89mm × 36mm	
1000 Labels 89mm × 49mm	£6(d
1000 Labels 102mm × 36mm	
Please state single or twin row when orde	

AMX MOUSE AND SOFTWARE

AMX Mouse and Super Art	£65(d)
AMX Pagemaker	£37(d)
Plance state commuter (P/P : Afact	

PRINTER RIBBONS & ACCESSORIES

Epson 8143 Serial XON/XOFF + OK Buffer	£26(d)
Epson 8148 Serial XON/OFF + 2K Buffer	
Epson LX80/86 Ribbon (Compatible)	
Epson 8302 LX/80/86 Tractor Unit	£19(c)
Epson 8338 LX80/86 Single Sheet Feeder	
Epson MX80/FX80/FX85/Juki 5510 Ribbon (compatible)	
Juki 5520 Colour Ribbon	£7.50(e)
Citizen 120D Ribbon	£4(e)
Mannesmann Tally MT85 Fabric Ribbon	£4.50(e)
Mannesmann Tally MT85 Carbon Film ribbon	£5.50(e)
Mannesmann Tally MT85/MT86 Font Cartridge	
Centronics Parallel Printer Lead (1.5m)	£6(e)
Full range of ribbons & accessories supplied - call for	or details

LANGUAGES

Micro-Prolog	£49(d)	ISO-Pascal	£42(d) Logo	£44(d)
BCPL £37(c) Forth	£32(e) Cor	nal £3	2(d) Lisp	£32(e)

BUSINESS SOFTWARE

View 2.1	£37(d) View 3.0	£57(d) Hi-View	£37(d)
View Sheet	£37(d) View Sto	re£37(d) View Spell	£29(d)
View Plot (1	Disc)£21(e)	View Index (Disc)	£10(e)
		Tape £7(e) Disc	
Inter-Sheet.	£39(d) Inter-Ch	art £26(d) Inter-Base	POA
Inter-Word	£39(d) Wordwise	£30(d) Wordwise Plu	s£37(d)

UTILITIES

Fleet Street Editor (Mirrorsoft)	£31(d)
Fleet Street Editor Fonts and Graphics (Mirrorsoft)£	11.75(e)
Fontwise Plus (Clares Micro Supplies)	£16(e)
Replica III (Clares Micro Supplies)	£11(e)
Please state 40 or 80 track when ordering	

BOOKS (No VAT on books)	
Master Reference Manuals:Part 1 £14(d) Part 2	£14(d)
Advanced Master Reference Manual	P.O.A.
Lisp £6.50(e) Forth£6.50(e) ISO Pascal	£6.50(e)
BCPL £14(d) View Guide£4.50(e) Into View	
View 3 £9(e) View Sheet £9(e) View Store	
* Large range supplied - phone for details *	

ROM BOARDS

ATPL 'Sidewise' £36(d) Please state B or B+

IUK Customers: please add 15% VAT to all prices (including carriage). Covernment and educational establishments official orders welcomed. When ordering please enclose a cheque or postal order for the appropriate amount. UK Carriage Rates (a) £8.50 – courser insured delivery (b) £3.50 (c) £2.50 (d) £1.50 (e) £1.00. All prices are correct at time of going to press. All offers are subject to availability, all prices are subject to change without prior notification and are available on request. Current price list is available on request.

NEW COMPUTER TITLES FROM CHAPMAN AND HALL

MICROCOMPUTER GRAPHICS

Michael Batty, Professor and Head of Department of Town Planning, UWIST

Professor Batty skillfully combines information on technical aspects and programming principles with an appropriate emphasis on art and design. He provides a comprehensive treatment of graphics explaining all the technical methods used in its professional study, but makes these accessible to beginners, and emphasises how visually appealing pictures can be produced quickly. As soon as a technique is introduced it is elaborated into a program used to produce a well structured and visually appealing design. All the programs are written in BBC BASIC and the book contains many black and white/colour plates of

Contents: Preface; Introduction: The evolution of computer art and graphics; Graphics primitives and geometrical prerequisites; Combining and transforming regular shapes into simple designs; Elementary picture structures: Two-dimensional flat landscapes; Randomness and recursion: Fractal landscapes; Complex picture structures: Three-dimensional realities; Animation, cartooning and simple computer movies; Conclusions; Further reading; References; Author index; Subject index.

Chapman and Hall Computing Series February 1987 344pp Hb 0 412 28530 4 £35.00 Pb 0 412 28540 1 £14.95

COMPUTING WITHOUT PROGRAMMING

A guide to software packages on the BBC microcomputer

Judy Citron

It is not necessary to learn programming in order to get the best out of a computer. Programming can be left to the specialists and heavy enthusiasts. The rest of us must concentrate instead on using microcomputers for every day purposes without worrying too much about the bits and bytes. This book shows the user how this can be done on a BBC microcomputer using the most common applications — word processing, database creation, and spreadsheet work.

February 1987 274pp Pb 0412281600 £9.50

THE HITCHIKER'S GUIDE TO ARTIFICIAL INTELLIGENCE: BBC BASIC VERSION

Richard Forsyth and Chris Naylor

..written in a readable style; concise but with detail, light-hearted where appropriate and at all times a pleasure' What Micro

This book is a practical, do-it-yourself introduction and guide for the home computer user and student of Al who wants to learn and profit from AI techniques.

All the programs are in BBC Basic BBC Basic version 1985 272pp Pb 0412 26970 8 £8.95



NEAPPLE SOF

Programs for the BBC models 'B' with disc drive with FREE updating service on all software

DIAGRAM

Still the only drawing program available for the BBC micro which gives you the ability to draw really large diagrams and scroll them smoothly around the screen stopping to edit them at any time if required.

Pineapple's unique method of storing the diagram information on disc means that the size of diagrams is limited only by the free space on disc, and not the amount of computer memory you have available. (A blank

80 track disc will allow up to 39 mode 0 screens of diagram).

The superb print routines supplied with the program enable large areas of the diagram to be printed in a single print run in a number of different sizes and rotated through 90 deg. if required. Full use can also be made of printers which have a wider than normal carriage available.

The program is fully compatible with the Marconi Tracker ball described below

PLEASE STATE 40 or 80 TRACK DISC & WHETHER STANDARD BBC or MASTER VERSION IS REQUIRED.

PRICE £25.00 + VAT

DIAGRAM UTILITIES

A suite of six utility programs which add additional features to the 'Diagram' drawing program. The utilities include the saving and loading of areas of diagram to and from disc. The ability to display the whole of your large diagram on the screen at one time (in either 4*4 or 8*8 screen format). The addition of borders and screen indents to diagrams, and the ability to shift a whole diagram in any direction.

PRICE £10.00 + VAT

MARCONI TRACKER BALL

This high quality device comes with it's own Icon Artmaster drawing program and utilities to enable it to be used in place of keyboard keys, joysticks, or with your own programs

PRICE £60.00 + VAT p&p £1.75 PRICE INCLUDING 'DIAGRAM' SOFTWARE £79.00 + VAT p&p £1.75

TRACKER BALL for MASTER series

The Pointer ROM is supplied instead of the Icon Artmaster disc and enables the Tracker ball to work directly with the MASTER series computers. (e.g. to use with TIMPAINT etc.). Prices are the same as for the standard tracker ball.

POINTER

The Pointer Rom is available separately for people already owning tracker balls, and comes with instructions for use with the MASTER computer.

PRICE £12.50 + VAT

This new release from Pineapple is a printed circuit board draughting aid which is aimed at producing complex double sided PCB's very rapidly using a standard BBC micro and any FX compatible dot-matrix

The program is supplied on EPROM and will run with any 32k BBC micro (including Master series). Also supplied is a disc containing a sample PCB layout to demonstrate the programs features.

By using an EPROM for the program code the maximum amount of RAM is available for storing component location and ASCII identification files etc. (Up to 500 components and 500 ASCII component descriptions may be stored for a given layout). These is no limit to the number of tracks for a given PCB, although the maximum size of board is restricted to 8" * 5.6"

Using a mode 1 screen, tracks on the top side of the board are shown in red, while those on the underside are blue. Each side of the board may be shown individually or superimposed. A component placement screen allows component outlines to be drawn for silk screen purposes and component numbers entered on this screen may be displayed during track routing to aid identification of roundels.

The print routines allow separate printouts of each side of the PCB in a very accurate expanded definition 1:1 or 2:1 scale, enabling direct contact printing to be used on resist covered copper clad board.

This program has too many superb features to describe adequately here, so please write or 'phone for more information and sample prinouts

PRICE £85.00 + VAT

CONVERTER LEADS

Converter leads to enable the Trackerball to run mouse software and the mouse to run trackerball software (inc. DIAGRAM). Please state which way round when ordering.

PRICE £8.00 + VAT

MICROSPICE

A new addition to our range of engineering software. Microspice is a very powerful DC and AC analogue circuit simulator package for any model BBC computer.

As well as all the usual facilities available with this type of program, non-linear effects, small signal, noise measurements and sweeps may be performed. Component values may be swept, allowing component tolerances to be investigated as well as thermal performance etc. Comprehensive transistor modelling is incorporated using a 20 parameter Ebers Moll description. The program is supplied on disc with a very comprehensive 49 page manual. Please write or 'phone for more information

PRICE £99.00 + VAT P&P FREE

ALL ORDERS SENT BY RETURN OF POST

39 Brownlea Gardens, Seven Kings, Ilford, Essex 1G3 9NL. ක Tel: 01-599 1476

Electronequip

* SPECIAL OFFERS *

MICROVITEC Medium Resolution

Monitor £255.30 inc VAT

ZENITH

Green/Orange Monitor £84.95 inc VAT

STAR NL10 120cps NLQ Printers with BBC cable

STAR POWERTYPE **Daisywheel Printer** 18cps £229 inc VAT

SILVER REED **EXP 500 Daisywheel** 15cps

£199 inc VAT

£229 inc VAT

CITIZEN 120D

120cps NLQ Printers with BBC cable £189.95 inc VAT

COMPUTERS

Master 128 Computer	£475.23
Master Compact without monitor + 10 free games disk	
Master Compact with colour monitor + 10 free games disk	
Compact Printer lead	
51/4" Adaptor lead for Compact	
SOFTWARE AVAILABLE FOR MASTER AND MASTER CO	

DISCS AND DRIVES

Dual 800K 40/80T (no P.S.U.)	£229.95
Single 400K/80T (No P.S.U.)	
1 Box DS/DD 96 TPI (10)	£11.95
1 Box 31/2" D.S. Discs (10)	239.00
51/4" Disk cleaning kit	

JOYSTICKS

Voltmace Delta 14B Joysticks	£13,46
Voltmace 14B/1 Adaptor Box	£13.36
Voltmace Delta 3B Twin Joysticks	
Voltmace Delta 3B Single Joystick	£11.95
Konix Speed King (switched joystick)	£14.95

ATPL Sideways ROM board £39.33 inc VAT

LARGE RANGE OF SPARES AND CHIPS AVAILABLE FOR THE BBC MICRO. PLEASE CALL FOR DETAILS

EDUCATIONAL AND H.M.G. ORDERS WELCOME

Prices subject to variation without prior notification All offers subject to availability Post 90p (per item) inc V.A.T. Securicor £6.00 (per parcel) inc V.A.T. Large stocks – 24 Hour Despatch (often same day)

Large order discounts (phone for details)







MAIN BRANCH:

59 WEST STREET, FAREHAM, **HAMPSHIRE PO16 0AT** Tel: (0329) 230670 KINGS LYNN BRANCH: Tel (0553) 773782

ALSO AT:

CONTRACT BRIDGE BRIDGE-MENTOR II

VERSION 1.10

"the best offering we have seen for the bridge player so far" BRIDGE CLUB REVIEW "an ideal teaching aid" ACORN USER

"The internationally acclaimed system for the COMPACT/MASTER/BBC/ELECTRON that can really improve your standard of play"

Practise your bidding: Perfect your card-play: Create your own archive of interesting hands

With high resolution colour graphics and sound, BRIDGE-MENTOR II guides you, step-by-step, through expertly analysed hands. A host of features including the spectacular "AUTOPLAY" option. The package now includes the famous "Challenge" hands archive . . . in total-over 60 testing hands to improve your game . . . with unlimited scope for more III

Now with comprehensive 24 page on-line user guide



BRIDGE-MENTOR II Version 1.10

For all MASTER/BBC/ELECTRON models with 32K+ and DFS/DDFS and MASTER COMPACT with ADFS. Also tape-to-disc for non standard systems.

5.25" Disc (DFS/DDFS) 3.5" Disc (ADFS) Tape-to-Disc

Please state 40/80 track where relevant

Cheques to:-

MINIC BUSINESS SERVICES, 12 WOBURN CLOSE, **BUSHEY, HERTS WD2 3XA.**



SOFTWARE IDEA?

START YOUR OWN BBC SOFTWARE BUSINESS

Three years ago, we had a good software idea.

It was not likely to be a million seller so the big fish did not want to know. . . and the sharks wanted all the profit and control in exchange for royalties based on wholesale (not retail) revenues.

SO WE DID IT OUR WAY... AND HAVE CREATED A THRIVING BUSINESS, TOTALLY UNDER OUR CONTROL WITH SALES IN OVER 30 COUNTRIES

Now we would like to help software developers to do the same, reaping the benefits from our experience, methods and contacts, but with YOU in the driving seat!


WE HAVE A UNIQUE, PROVEN APPROACH TO GETTING YOU STARTED IN YOUR OWN SOFTWARE BUSINESS

If you have a software idea for the BBC series, write to us including the programs on 40/80 track DFS disc or cassette and an appraisal fee of £10.00. We will review your idea and send you a comprehensive marketing

If your idea has the potential we are looking for, we will introduce you to our unique approach, and help you on your way to your own software business.

IF YOU HAVE THE PRODUCT... WE HAVE THE METHOD.

RESEARCH and DEVELOPMENT MANAGER. MINIC BUSINESS SERVICES. 12, WOBURN CLOSE, **BUSHEY, HERTS.** WD2 3XA

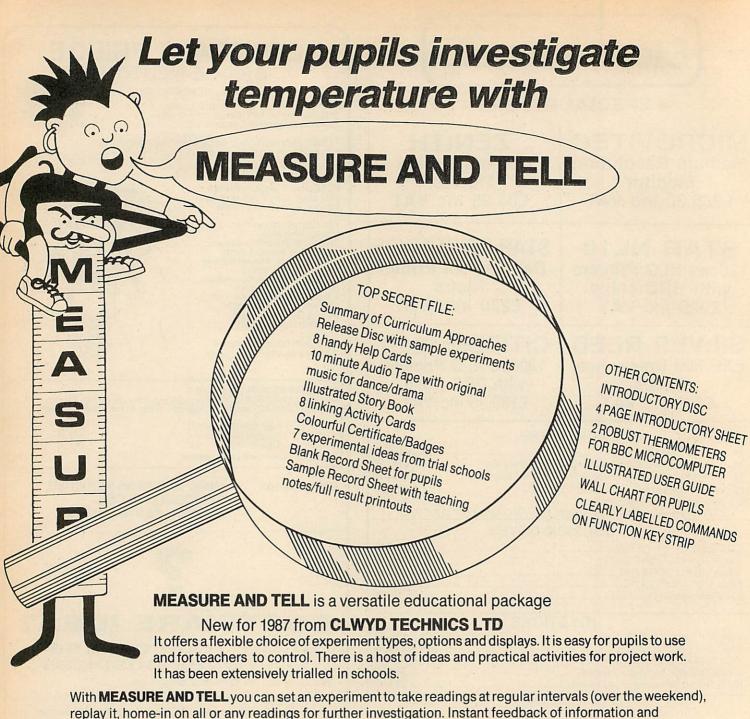

replay it, home-in on all or any readings for further investigation. Instant feedback of information and detailed printout results.

The software is designed to work with a D.E. Talker speech chip, creating a 'talking thermometer'! The chip is available for the BBC B version as an optional extra to the package.

Another top class package for education from CLWYD TECHNICS LTD.

Why not place an order straight away. Return this voucher with your order form and the MEASURE AND TELL pack is yours for only £49.45 (ex. VAT)
FROM CLWYD TECHNICS LIMITED
Offer ends 30 April 1987

MEASURE AND TELL TEMPERATURE PACK

To: Clwyd Technics Limited, Unit 4B, Antelope Industrial Estate, Rhydymwyn, Nr. Mold, Clwyd CH7 5JH. Tel: Hendre (035283) 751

Please send further details of the Measure and Tell pack. Lenclose an order for the Measure and Tell pack for £49.45 (+ VAT) + £2 p. & p.

☐ 40 Track ☐ 80 Track ☐ Primary ☐ Secondary (Please tick for required version)

School/Authority

Order No.

Telephone

EDUGATION

School software in cash peril

The second part of the Department of Trade and Industry's three-stage allowance for software purchase ends on March 31. This, the largest of the three allocations of money totalling £3.5 million has provided schools with a unique opportunity to indulge in software experimentation. The next financial year sees approximately half the amount of cash available before the scheme closes in March 1988. The outlook from then on may well be bleak not only for software houses, whose industry has seen an artificial boom created by the injection of money, but also for schools which will



MESU's Foster: aims to support

need to fight for finance to outlay on software.

Software houses are now having to plan for the next 12 months. The development of new products may well be pointless since schools will not have the cash to buy them.

As one software producer re- initiatives. Their fellowship

marked at a recent conference: 'The bubble looks ready to burst. After that we shall need to look at what schools need to help them use what they've already bought.'

This view, reinforced by the opinions of other software houses, seems to indicate that a change of emphasis is on the way in the development of educational materials for computers. This fits in well with the objectives of the Microelectronics Support Unit (MESU).

Director John Foster has committed MESU to supporting existing materials rather than creating absolutely new

scheme, in which teachers are drawn out from schools to create packs of teaching materials, is now underway and heading towards that goal. The opinion has been expressed that software houses and these MESU fellows may well be able to complement each other and move towards an arrangement that satisfies both their needs.

Many of the software houses, certainly, are unlikely to survive unless such an initiative is taken. Their demise would be a sad blow to the prospects of development for new ideas.



Valiant turtle going strong

Valiant, who we reported last month had gone out of business, is in fact very much alive and kicking and bringing out a series of worksheets for schools and teachers.

Gill Manvell at Valiant said the company had sold 10,000 of its infra-red beam controlled turtles around the world. More details on page 17 of the main news section.

Valiant's address is 370 York Road, London SW18 1SP. Tel: 01-874 8747.

New adventure packages

Simulations and adventures remain top software purchases in primary schools. Consequently companies like 4mation (Flowers of Crystal, Granny's Garden, Box of Treasures) have thrived. Smaller companies have produced interesting materials too. One such is Sherston Software who are already well-known for Wizard's Revenge, Wizard's Return and The Circus.

Sherston has now brought out several excellent new packages. Their great strength lies not only in the content and structure of their materials but also the excellent graphics.

In Animal Rescue the user must discover which animal from the animal park has been



The Animal Rescue package

stolen by the nasty troll and then rescue it. This framework is used to present a number of mathematical problems which must be solved before the child moves to the next section. In addition to the two discs, there is a story book and three sheets of large print words.

Space Mission Mada reworks the idea of bringing life back to a region that has been mysteriously made barren. The users are placed in the role of beings from outer space who intercept distress calls from Earth. Their task is to bring seed to the stricken area which will make it bloom again. Again the tasks involved are mathematical.


Story. Starts is a pack of four programs which begin an adventure and leave the user suspended in the jaws of a dilemma! The objective is to use the programs as a means to producing creative writing.

Sherton's materials pleasantly presented at a very reasonable price at £16 each.

Sherston Software, 8 Court Street, Malmesbury, OLL. Tel: (066) 840433.

PEDMATE

A Graphic Illustration

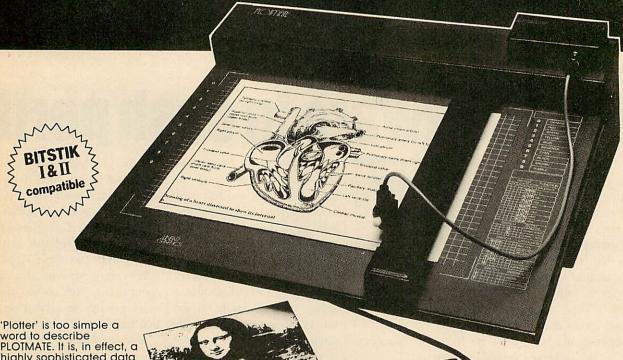

'Plotfer' is too simple a word to describe PLOTMATE. It is, in effect, a highly sophisticated data communications device that greatly extends a micro system's options and capabilities allowing high resolution input and high definition output. It is compatible with all leading micros including the BBC, IBM, AMSTRAD, ATARI and NIMBUS.

NEW RELEASES
HPGL

IMAGE SCANNING

EXTENDED GRAPHICS COMMANDS

DOMESDAY

By expanding the on-board graphics language range PLOTMATE understands commands from HPGL 7475A/7470A industry standard languages enabling compatibility with BITSTICK, AUTOCAD, LOTUS 123, SUPERCALC 3, CHARTMASTER and many others.

PLOTMATE's flexibility is further extended by the use of Linear Graphics' own scanner, LINSCAN. This allows PLOTMATE to function as a sophisticated image scanner producing high resolution pictures that can be used within desktop publishing packages such as Pagemaker, GEM, Fleet Street Editor and Image.

The in-built graphics commands of the BBC micro that PLOTMATE understands now encompass the extended graphics commands of the BBC Master such as circle and arc drawing, sector and segment filling, rectangle and parallelogram shading.

All 'Welcome' disks allow data files produced by the DOMESDAY database to be output in pie, bar and line chart format on the BBC Master.

Not content with providing this wealth of technical capacity Linear Graphics have even introduced a unique discount scheme for primary and secondary schools—the 'Educational Support Scheme.'

image scanner — LINSCAN.

PLOTMATE A3M with Linear

Graphics' high resolution

INEAR GRAPHICS
INVESTIGATIONAL
SUPPORT
SCHEME
SCHEM

COMPARE THESE PRICES!
PLOTMATE A4S
PLOTMATE A4SM
\$237 a saving of 25%
\$337 a saving of 25%

PLOTMATE A3 (with free Cadlink Disk)

PLOTMATE A3M

LINSCAN

£299 a saving of 30%
£426 a saving of 25%
£120 a saving of 20%

UPGRADE KIT A3 TO A3M £150
PLUS save 20%-25% on all plotting accessories.

All prices are ex VAT

N. N.

manufactured products and approved by ILEA.

PET	\bigcap	ATF		
LINEAR (ASE	PHC	SL	TD


28 Purdeys Way Rochford Essex SS4 1NE Tel 0702 541663/4/5 Telex 995701

Please	send	me	details	on	Linear	Graphics'	PLOTMATE.	1 ar	m
particu	larly i	ntere	ested in	(ple	ase ind	icate)			

IAME	
OSITION	
STABLISHMENT	
ADDRESS	

AU4

EDUCATION

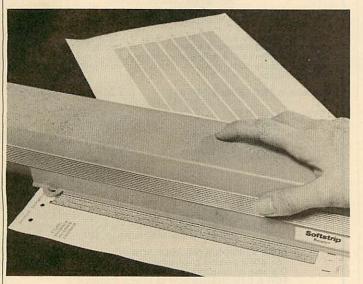

New reader makes distribution simpler

to provide a simple means for software distribution within and between LEAs. The reader comprises a scanning head driven along a code line which reads the stored information using near-infrared light. The strips are readable even when defaced and do not suffer from magnetic or other interference. Data density on the strip can

The Softstrip Reader looks set | vary between 15 and 200 bytes per square centimetre and low density strips may be produced using a dot-matrix printer or photography. Typically, a 12page double-spaced document may be accommodated in four high density strips.

> What makes the medium exciting for education is that public domain materials could be copied using only a photocopier. The finished pages may then be posted and copied again. School projects and datafiles may be transmitted, exchanged and/or stored very cheaply and as a back-up to discs, this medium will be seen as a good alternative.

Even more exciting is the fact that, unlike the rather variable bar-code reader, the publishing of listings in user magazines, local authority bulletins and news-sheets will become a realistic possibility.

The Softstrip Reader costs £200 and comes with a pack of business-orientated software. The creator package for the strips, StripMaker, is available at £20 plus VAT and is compatible with Epson and related dot-matrix printers.

Softstrip International, 53 Bedford Square, London WC1B 3DP. Tel: 01-631 3775.

Welcome improvements in Developing Tray program

One the the most popular and straightforward language programs, Developing Tray, has been given a facelift.

This package, which involves letter prediction in a blank passage of text, has been freely copiable since its development by Bob Moy. During that time it has been used by English teachers - secondary, primary, special needs, modern languages and a host of other subjects who have found its facilities a means for focusing children's minds on the content of what they are reading.

As letters are predicted the text begins to develop on screen. Strategies for discovering what words are become more sophisticated as children realise the potential of buying one or two specific letters throughout the text. The process is encouraged by a lively scoring system.

The new version, Developing Tray 2, has been developed at Redbridge SEMERC. For those already familiar with the program the improvements will be

welcome. The user is always in predict mode and may move the cursor anywhere on the screen. Letters and complete words may be bought at the cursor position, the text may be printed slowly on the screen as a means of introduction and it can be printed out at any point. Partly completed texts may be saved with a variety of filenames to allow different groups to save the same text, and specific words, phrases or letters may be displayed when the blank text is first screened. Teacher controlled settings are now easily monitored from a control page and wordprocessor text may be spooled into the package. Introductory text can be displayed before running the program.

All of these new facilities have come about through recommendations made by teachers who have used the package. The modifications have been programmed by Mike Blamires in co-operation with Bob Moy.

Teachers wishing to obtain a copy of the new package should get in touch with the SEMERC contact schools in their authority or obtain information from their computer education adviser.

Educational Administration Software has introduced a new pricing policy for the Administrator's Friend package.

A six month trial period will enable schools to have first hand experience of computer assisted administration for a minimal outlay.

For £50 the company will self a school administrator, is

send schools the entire package and at the end of the trial period, the school may keep the basic package (now reduced to £50) and will be invoiced for any additional modules that they wish to keep.

John Callaghan, the proprietor of the company and himconfident that schools will want to keep a substantial part of the package when they realise what it can do for them. The company has set up training courses for schools taking advantage of the offer.

EAS, Somerville House, Brunswick Road, Withington, Manchester, M20 9GA.

BBC/ELECTRON EDUCATIONAL SOFTWARE

Our educational software is used in thousands of schools and homes throughout Great Britain.

£6.95 £8.95 Tape £8.00 Disc £10.00 EDUCATIONAL 1

BBC/ELECTRON

Tape 20-80 Disc 218

Hours of fun and learning for children aged five to nine years. Animated graphics will encourage children to enjoy counting, maths, spelling and telling the time. The tape includes six programs: MATH 1, MATH 2, CUBECOUNT, SHAPES, SPELL and CLOCK.

'An excellent mixture of games' . . . Personal Software - Autumn 1983.

Although similar to Educational 1 this tape is more advanced and aimed at seven to twelve year olds. The tape includes MATH 1, MATH 2, AREA, MEMORY, CUBECOUNT and SPELL.

£6.95 **FUN WITH NUMBERS** Tape £8.00 Disc £10.00 BBC/ELECTRON These programs will teach and test basic counting, addition and subtraction skills for four to seven year olds. The tape includes COUNTING, ADDING, SUBTRACTION and an arcade type game called ROCKET MATHS which will exercise addition and subtraction. With sound and visual effects.

... "These are excellent programs which teachers on the project have no hesitation in recommending to other teachers." ... Computers in the Classroom Project, Riley High School.

16.95 E8. Start your fun with alphabet puzzle, continue your play with VOWELS, learn the difference between THERE and THEIR, have games with SUFFIXES and reward yourself with a game of HANGMAN.

"Very good indeed"... A&B Computing — Jan/Feb 1984

JIGSAW AND SLIDING PUZZLES by P. Warner BBC/ELECTRON Tape 20-00 Disc £8.95
There are two jigsaw and four sliding puzzles on a 3 × 3 and 4 × 4 grid. Each program at an easy level to ensure initial success but gradually becomes harder. It helps children to develop spatial imagination and in solving problems. The tape includes: OBLONG, JIGSAW, HOUSE, NUMBERS, CLOWN and LETTERS. Tape £8.00 Disc £10.00

BBC Disc £12.95 Simulation program based on Thor Heyerdahl's KON-TIKI expedition. Enjoy a journey on the KON-TIKI recording on a map the raft's position and entering notes in the logbook on creatures found, unusual events etc. Inclusive of booklet, background information, maps and fully supportive

"A well thought-out package with a wide appeal" . . . Which Micro & Software Review — October 1984

> **SPECIAL OFFER** Buy three titles and deduct £4.00 Add 50p p&p per order. Please state BBC or ELECTRON or 40 or 80 track 51/4" + 31/4" 80T discs.

Golem Ltd, Dept A, 77 Qualitas, Bracknell, Berks RG12 4QG, Tel: 0344 50720

CommunI

Communitel is an exciting professional viewdata system for the BBC B, Master & Compact Micros (DFS, ADFS or Network).

IT'S USES IN EDUCATION INCLUDE

Learning Information Technology Structuring Creative Learning Cross-Curricular Development Administration/Publicity

The system includes a comprehensive suite of programs which enables the creation of a database with message facilities, which can then be made available to callers using a telephone line and any viewdata terminal. The package includes comprehensive Tutorial and Reference manuals and a sample database.

Available in TWO LEVELS FOR USE WITH THE DTI (DeCom or Tandata) SCHOOLS MODEM

LEVEL 1+ FRAME EDITOR SEARCH CAROUSEL DISPLAY FRAME PRINTER VIEWDATA-TERMINAL

LEVEL 2 FRAME EDITOR SEARCH CAROUSEL DISPLAY FRAME PRINTER VIEWDATA-TERMINAL DIAL IN HOST SYSTEM TELESOFTWARE FORMATTER

LEVEL 1+ £55

LEVEL 2 £95

Upgrade from LEVEL 1+ TO LEVEL 2 £45 LEVEL 2 with Auto-answer/Auto-dial MODEM from £375 (all prices exclude p.p. & VAT)

ADES VERSION AVAILABLE NOW The ADFS version gives up to 600 pages with a single 80 track D.S. disk or thousands of pages using a Winchester disc drive. FOR A DEMONSTRATION of LEVEL 2 dial:

Viewdata No 01-968 7402 or Telephone 01-960 7998 REFLECT ON IT ... AND ORDER

Inumm

The flexible computer benching system



The Klick flexible benching system has been designed for constructing free standing benching which can be assembled quickly and easily. The Standard range is available in 3 heights and can be supplied with a selection of underbench storage units. The Flexi range provides the scope for any unusual size, height or configuration required. For product brochure and price list please contact:

Store Stock Systems Ltd, Claverton Road, off Floats Road, Wythenshawe, Manchester M23 9NE Telephone 061-998 9726

Succeed with LCL Educational Software

COMPLETE SELF-TUITION GCSE/GCE COURSES



THE BEST awarded the highest ever marks for ed. soft. in recent mag. review.

Hons. graduate authors. World leaders (distributors in 24 countries).

FOR YOU for beginners (from ages

8 to adult), exam candidates or teachers with any BBC Micro (B, B+, Master or Compact or Electron.

NOW immediate dispatch.

Each course consists of 24 programs on up to 105 topics held on 2 discs/tapes and usually with 2 books and a voice tape and costs only £24

£5 off total for 2 courses, £10 off for 3, £17 off for all 4

MICRO FRENCH (NEW) MICRO MATHS MICRO ENGLISH **MEGA MATHS**

With real speech & graphics adventure game Best seller, highly acclaimed Eng. Language or EFL with real speech

A-level course with all Calculus by graphics

LCL (Dept A) Melody House, Greys Road, Henley, Oxon, RG9 1QU



166

or ring 0491 579345 (10am-10pm)

BARCLAYCARD

NAME -	ADDRE	ss ————
TITLE -	—— COMPUTER——	- 40/80Disc/Tape/Compact

EDUCATION PICTURE PROCESSING


One of the most popular types of software is graphics packages, especially in schools

Chris Drage and Nick Evans

Graphics is one of the most popular areas for using the micro, both at school and in the home. Since we last looked at this topic in November 1985, several new packages have arrived, although some of the old favourites are still going strong.

Our main theme then was that pictures should be treated in the same way as words and we suggested a number of packages that offered 'picture processing' facilities which children can grasp fairly quickly That theory still holds true, but the range of software now allows us to propose a developmental approach to computer art in the school linked to the age and ability of children. They should be led to understand computer art as 'picture processing' - providing the same dynamic approach to editing and alteration as wordprocessing does for writing. Underpinning this is the concept of providing individual children with an alternative to the constraints of traditional materials. In exploring the new possibilities, children need to develop concepts, skills and knowledge commensurate with their age and maturity. With the range of graphics software available today, a developmental approach is both desirable and possible.

The extremely sensitive and accurate Colour Stick light pen from ATP is perhaps the ultimate light pen for the BBC micro. It is accompanied by a superb art program called Palette. For upper junior and lower secondary children this offers a number of sophisticated tools, including shape manipulation with twisting and shearing. A variety of colour effects and dithering (to make shades and patterns), are introduced. These are only equalled by AMX Super Art. Various type fonts are included. All features are accessed via eight icon-driven menus, but the screen is never cluttered as only one set of facilities is available at any time. Screens may be imported from a number of other graphics packages including AMX, Watford's light pen package and Technomatic's Novacad. For secondary students wishing to add colour to a technical drawing draft, Palette will be just the right piece of software.

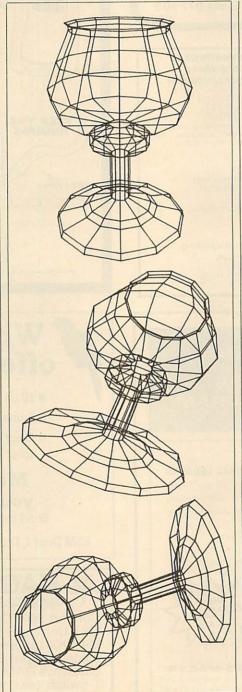

Wire frame line drawings created using Glentop's 3D Graphics Development System

The Robin light pen is still the only package suitable for young infants, apart from the picture painting program with the Microvitec Touchscreen. It is a real treat to discover that a program as useful as Paint-

brush is included as part of the package. Its success is due to its simplicity, enabling children to get down to work creating vivid screen images almost immediately. Paint-brush software coupled with the natural method of input offered by the Robin light pen, provides an excellent starting point. It is one of the devices singled out before and is still going strong.

If a school has invested in the Robin light pen, many children will have outgrown Paint-brush and will be looking for more challenging graphics techniques. Penpal, designed to work with virtually any light pen (it is supplied with Watford's), gives the user the maximum freedom to create images. The screen becomes a 'canvas' on which the child-artist works. The unique feature of Penpal must be the 'tricks', or special effects option. It invites experimentation with starbursts, perspective aids, scaling, pixtel-plotting and grids. Numerous permutations are possible and children simply love it. With Penpal the choice of characters from the keyboard is boosted by a set of 27 shapes and designunits. For a program that will provide children with enormous creative possibilities and encourage experimentation, look no further than Penpal. A mouse driven version is aptly entitled Mousepal.

Schools which have invested in a Concept Keyboard have Computer Art, an excellent package for children of junior school age. It uses a unique adjustable screen window with a number of predefined shapes to provide children with a basic tool kit from which to develop more complex shapes. Its value lies in the totally different approach to picture processing it provides, encouraging children to diverge from the traditional approach.

Picture Craft from BBC Soft is designed for children six to 14 years of age. The software allows children to design and create pictures which may be saved and used later in a number of games and puzzles. The program is controlled via a number of menus. Teachers have access to a set-up menu from which a large number of facilities controlling picture design and

VERSATILE CAD/CAM For the BBC Micro

A sophisticated, menu driven, user friendly CAD/CAM package with many facilities for very accurate drawing construction and data extraction for Numeric Control (NC) post processing.

CAD System (EDUCAD) — £80 (ex. vat)

- geometric/schematic drawings zoom, scale and units control
- text/symbols, any size and angle
- mirror and duplicate

generalised x-y plotter output area properties

"area properties "revision/material info. editor

CAM System (EDUCNC) - £35 (ex. vat)

"part geometry from EDUCAD "part profile definition
"tool path animation "generalised NC poest processor

Both packages have explicit input prompts and error messages. This together with over 80
pages of online HELP data makes these systems easy to use and easy to learn - an ideal way
of introducing this new technology.

TO ORDER is simply specify disk formal requirements or to obtain further details eached.

TO ORDER simply specify disk format requirements or to obtain further details contact:

EDUSOFT, 15 Tamworth Business Centre, Amber Close, Amington, Tamworth, Staffs B77 4DS

construction/modification text/symbol font editor intersects and tangents

graphics screen dump revision/material info. editor

rubber banding

"An island of excellence in a sea of substandard software." (primary head)

THE FIRST COLLECTION (primary maths)
DISC 1 — SPOT, RAMBLE ROAD, POST
DISC 2 — CIDER, SWALLOWS, SPIDER

Press reviews called them "Kestrel's super six...high quality...imaginative...vivid...excellent...immediately appealing...shrewd...clever...addictive...instructive...very
enjoyable...easy to use...clear and bright...graphically exciting...superb."
Honestly, they're not that amazing.
They just let young children learn — and enjoy it!

KESTREL EARLY NUMBERS
(counting, adding, subtracting, comparing)
DISC 1 – theme DISC 2 – variations
. .and in preparation.

NEXUS – individual code-cracking adventures
for any number of players
all on one computer all at the same time!

OPIC - new learning paths in reading and spelling. EACH DISC £8+ vat, 40 or 80 track Free 28-day inspection for schools BESS, Ellesmere House, Keyingham Hull, HU12 9SP. Tel. 09644 2279

問的國際問題 www PLAN Zoo RESEARCH FIND ANIMAL RESCUE THE LOST FACTS ANIMALS FIND OUT ABOUT ZOOS SOLVE PROBLEMS FEED THE MIMALS Zeepak Contains 5 programs, a comprehensive software manual, activity sheets, an illustrated story, zoo info, Concept Keyboard overlays, disc labels and lots of suggestions and ideas to get you started on your zoo project. For infants and older children. BBC B/B+/Master/Compact £21.00 + VAT. Disc version only Educations
Resources Educational

TOINT FOR A ZOO PROJECT

A LOW COST DISC BASED PROFESSIONAL **ACCOUNTING PROGRAM**

For The BBC Computer

Micro-Trader "

INTEGRATED SALES PURCHASE AND NOMINAL LEDGERS

Designed for business use by a business man. " Micro-Trader " Sales and Purchase Ledger Transactions are updated to the Nominal Ledger.

Micro-Trader " offers full Sales and Purchase Ledger facilities including SALES INVOICE and STATEMENT PRINTING with a capacity of 450 accounts and 3000 transactions per month in each Ledger.

Normal Income, Expenditure, Assets, Liabilities' & Journal Posting in the Nominal Ledger with full Reporting for individual accounts, Audit Trail, Trial Balance, Profit & Loss and Balance Sheet.

"MICRO-STOCK"

Stock Control program, fully integrated with Micro-Trader". 4000 Stock Items with user defined Codes. Invoice and Credit Notes and Cash Sales routine. Full Stock Held Reports.



£75.00 + V.A.T.



NEW "MICRO-MAILER" A Mailmerge program, fully integrated with

"MICRO-TRADER" With a user Database.


£30.00 + V.A.T.

PHONE TODAY FOR A FREE FACT SHEET

1112/4 0 (0) 11) (6(0)111211

11, LONDON STREET, WHITCHURCH, HAMPSHIRE, RG28 7LH

Telephone: Whitchurch (025682) 2008



- 30 days free approval
- Software for all ages and abilities
- Over 60 best selling programs from ESM, ASK and Shiva

Make the most of your micro in 1987

Send for your ESM Catalogue now!

ESM Dept 1, Duke Street, Wisbech, Cambs PE13 2AE

MAGUS ELECTRONICS Specialists in Microprocessor Systems and Industrial Controls Convert 80T Drive to 40/80 switchable Mk II Unit (cased). Simply plugs in.....£19 Mk I Kit (as above, but requires soldering iron). Fits inside Drive...... Sideways RAM system. 16K with software.....£25 T-switch (switches parallel computer output to selected Printer Printer Buffer, serial and parallel converters Prices on application COMPUTER REPAIRS ALL PRICES INCLUDE VAT AND DELIVERY DEPT A3, 33 POOL LANE, WINTERLEY, SANDBACH, CHESHIRE CW11 0RZ.

TELEPHONE: (0270) 582748

EDUCATION

painting, filing and printing may be selected or ignored according to the ability of the children being taught. The program can be as simple or as complex as the teacher wishes. Flexibility is one of *Picture Craft*'s major attributes.


Within the design module, pictures are created using the default set of shapes (which can be redesigned). Reflections, rotations and 'stretches' are possible, and colour is added in the painting module. Not only are the standard BBC micro colours available, but four striped and dotted painting options are also possible. Once saved, the picture may be used in any one of four games:

- 1 Swaps: subdivided segments of the picture are rearranged.
- 2 Twister: picture segments are rotated.
- 3 Swaps & Twist: a combination of one and two above.
- 4 Block Slide: picture transformed into a sliding block puzzle.

There is no doubt the games provide a new dimension to an already sophisitcated graphics package. The 120-page manual has a section on how to integrate the software into mathematics topics on shape, and contains many excellent ideas. *Picture Craft* provides considerable insight into the composition of shape, patterns and design.

At the primary level the child is picture processing with basic computer tools. These involve simple drawing of shapes, filling and manipulation of images – the building-blocks of the more advanced techniques that are available for users of the art and design packages at the top end of the BBC micro market and therefore are more likely to be used in the secondary school. The first issue in choosing any of these packages is that of purpose. What objective does the user have? What end result is desired? How will that result be presented?

The first and main division is the style of the package - roughly dividing into art, design and image processing. Art packages tend to be free-form, so users are not bound by drawing rules but are free to express themselves through the medium of a light pen, mouse, trackerball or other input device (see our July '86 article). Design packages roughly mirror the oldstyle technical drawing principles. The objective is to create a working drawing, usually to scale, and often from a number of viewpoints or in a particular 'projection' - isometric, orthographic etc. The final style is image processing which may really be an extension of either or both the other styles of package. Moreover it may draw in

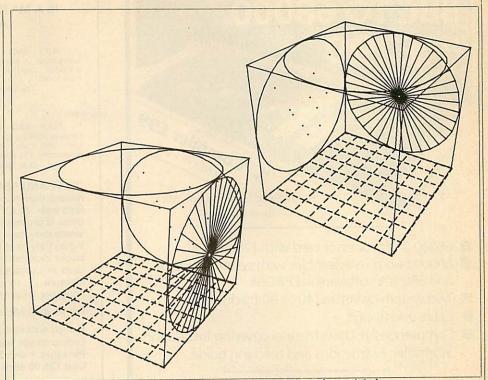

The images from the Glentop package can be shrunk, enlarged or rotated

a good deal more in the way of information from the outside world through the 'grabbing' of video stills from a camera, recorder or live broadcast. Also, images from other packages – designs, 'cut-outs' and any other screen or digital information may be manipulated in a number of ways.

Having decided upon the style of package, it is necessary to consider the facilities you require and the target user group. For example, to land a third year set of beginners with Ibbotson's *DDX* would be rather like introducing them to the rules of aviation to fly a paper plane.

In the same way that Picture Craft was deemed to be a good all-round package for primary children (and not without relevance in secondary school), so too a good general package for the secondary phase is Image from Cambridge Micro Software. Image has an immaculate pedigree coming from the Homerton College team working under the auspices of the Microelectronics Education Programme. It provides a number of levels of use, all explicit within the program. The drawing routines are driven using the arrow and return keys if no other input device is being used. A simple fill may be used drawing on pure colours or a mixed fill may be chosen by moving into the 'mixing room' (you were previously in - yes you've guessed it - the drawing room!). Users of the AMX drawing packages will be familiar with the techniques of creating patterns and textures and this is of course available in colour in the 'paint

store'. Moreover the user may draw on geometric figures, arcs, rays and dots to create shapes.

Having created any particular shape the user may then compress it in a number of ways, reflect and rotate it. These facilities are not remarkable in themselves since they do appear in other packages. However, the power of Image lies in its flexibility. An additional part of the package is 'sketchbook' which has the obvious purpose of allowing the user to try out different variations on a particular theme without losing the main idea being worked on elsewhere. It may also be used in isolation from the main package. One further encouragement for school users is the range of ideas suggested at the back of the manual for imaginative use in the art and design classroom. Add to this the ability to import images from any number of sources - including video - and it soon becomes apparent how comprehensive Image is. It can be configured for a number of systems and with a variety of printers - mostly coloured ones although ordinary black on white still produces good results.

Moving into the design field, there's DDX from Ibbotson. This is intended for draughtsmen and advanced students in technical design. It can pull in elements from a library of component drawings which may then be edited into the main work. Moreover, split-screen ability means drawings larger than the screen area may be created by moving a window around the



PLAY AND BEAD

IS A MAJOR STEP FORWARD IN HELPING ALL CHILDREN TO READ

"' 'PLAY AND READ' is succeeding where many orthodox teaching methods have failed."

The Liverpool Echo

" 'PLAY AND READ' is certainly working for us I can and do confidently recommend it to others."

D.N. Head Teacher



'PLAY AND READ' gives the children the incentive and the reward they need. Children of 5 to 11 years are learning to read with 'PLAY AND READ' and enjoying it. The computer game is presented in such a way that the children retain the words they have learned from day-to-day and week-to-week. When they have learned the words the children can read the books included in the package. 'PLAY AND READ' can be used in conjunction with reading schemes or reading for pleasure.

For more information write or telephone Prisma Software.

For all BBC Microcomputers.

Proved successful with children of 5 to 11 years.

Each package teaches 54 words.

Packages 1 and 2 now available.

Cost £25.00 each (plus VAT and p & p). Total cost£29.95

PLAY REÂD Order now from: PRISMA SOFTWARE FREEPOST PO BOX 211 CHESTER CH1 3YZ Chester (0244) 26244

(Dept AU4) PRINTWORKS LANE, LEVENSHULME, MANCHESTER M19 3JP. Tel 061-224 1888 or 061-224 9888

SECONDHAND BEEBS BOUGHT AND SOLD

Government + Educational Establishments' Official Orders Accepted



APPOINTED WATFORD DEALER

Mancomp are now the main Northern Distributors for Watford Electronics and will be stocking all of Watford's popular range of hardware and software — all at Watford's prices. Phone first for availability.





B.T. Approved Modem complete with software £86.25

300, 1200 & Prestel Auto Dial Modem alone – £89.95 Software – £39.95

All our prices include VAT Please add carriage £5.50 for Printers & Drives £1.50 for other items

EXPRESS SPECTRUM, BBC and COMMODORE

in all U.K. with While-u-Wait repairs! with INTERNATIONAL repair service!

FOR PROFESSIONALISM — "Of all the repair companies 'Sinclair User' spoke to, MANCOMP seemed the MOST PROFESSIONAL when it came to advice and a helpful attitude" AUG 85.

FOR HONESTY — We let you watch

FOR HONESTY – We let you watch your computer being repaired and if there is nothing wrong with it, we will tell you!!!

FOR REPUTATION & HELPFULNESS – "I have come across a firm that will be more than willing to advise you as to how to remedy your problems. They are called MANCOMP and as well as repairing faulty computers, are also quite willing to discuss your problems with you and offer reasonably cheap and more importantly CORRECT CURES" Phil Rogers POPULAR COMPUTING WEEKLY JAN 85.


WHY PAY HIGH 'FIXED' PRICES

(We do not charge you for our fancy premises by charging high 'fixed' prices!) Reputations take time to build, we have been repairing ZX 81's, Spectrums, QL's, Apples and BBC's professionally, for 21/2 years – who is coming second?

WHY DELAY – OUR ESTIMATES ARE FREE AND WITHOUT OBLIGATION. IF YOU DO NOT LIKE OUR ESTIMATE WE WILL RETURN THE COMPUTER AND REFUID THE POSTAGE INCURRED! EXTRA-SPECIAL DISCOUNTS FOR EDUC INST. H.M. FORCES, CHARITIES, HOSPITALS! Every parcel sent by Royal Mail Receipted Post and insured for return journey! (For next day delivery include £1.50 extra). (Securicor by prior arrangement).

. others do tomorrow!

EDUCATION

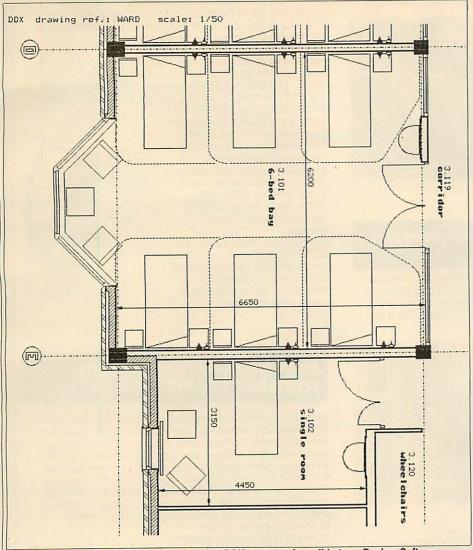

The above room plan was drawn using the DDX program from Ibbotson Design Software

drawing area. This technique is used by many advanced packages, not simply because of the memory limitations of the BBC micro but also because it is not physically possible to contain most complete designs in a single screen area.

Naturally, such facilities would merely confuse the issue when put in front of a beginner. That is why, as is common to the use of many applications, we are proposing a hierarchical structure of development from simple processing through to more advanced design techniques.

The packages so far mentioned have only been a selection from the great variety available. Little mention has been made for example of AMX's Super Art and its associated 3D Zicon. Glentop's 3D Graphics Development System provides the means for creating three-dimensional wire frame images and then rotating them in a number of axes, shrinking and enlarging them, altering their perspective and animating them. Ibbotson Design Software produces a three-dimensional package called

3D View. This provides similar facilities to the Glentop package although at a slightly higher price. Also from this stable comes Digital Drawings, a scaled down version of DDX. Again, it should be noted that the Ibbotson packages have a good pedigree – the author is an architect. In direct competition with DDX is AB Designs' AB2 which may be used both as an art and design package. Technomatic's Novacad has only been mentioned, yet it is a computer-aided draighting package with the ability, like DDX, to produce complex design drawings. It can link to plotters and even drive a moulding tool.

Readers may have seen mention in Acorn User of ACADE – the Association for Computing in Design Education. This group was set up a year ago and has local and special interest groups. A meeting will be held during the Eurographics Conference at the University of East Anglia in April this year.

Although we may propose a developmental approach to computer art and

design it is not easy to pin down any specific packages since the needs of one school – or rather one group of schools since one should plan across the age ranges – may be very different from another.

What we have tried to do in this article is to explain and point out the areas of importance for consideration by teachers planning such an approach. We have also suggested some titles although this list is by no means exhaustive. As with all such decisions, they are best taken on the grounds of experience and we would suggest most strongly that before buying any art or design package you attempt to see it in action, either at your local computer centre or at a school which already employs it in their curriculum. For those wishing to whet their appetites, a good introduction to graphics is in the series in Acorn User October '85 to January '86 by Jim MacGregor and Alan Watt.

The Robin light pen is available from The Educational Software Company (Southport), 108 Parthenon Drive, Liverpool L11 7AQ and it costs £41.40.

The Colour Stick including Palette can be obtained by contacting Advanced Technology Products, Station Road, Lowne, Chesterfield S43 4AB. It costs £39.50 plus VAT for the disc version.

Picture Craft is supplied by BBC Publications, 35 Marylebone High Street, London W1M 4AA. It runs on the BBC B, B+ and Master 128 and retails at £19.95 for the disc version.

Computer Art from AB European Marketing, Wharfdale Road, Pentwyn, Cardiff CF2 7HB, works on the BBC B, B+ and Master and retails at £13.10 for A3 or £12.70 for A4 and comes as part of AB's introductory software set.

Penpal and Mousepal are supplied by Rondo Products, 5 Keswick Gardens, Wembley, Middlesex HA9 7JH. They work on the BBC B, B+, and Master 128 and cost £12 for disc.

DDX (£125), Digital Drawings (£65) and 3D View (£35) are available from Ibbotson Design Software, The Byre, Ecclesbourne Lane, Idridgehay DE4 4JB.

Image is available from Cambridge Micro Software, Edinburgh Building, Shaftesbury Road, Cambridge, CB2 2RU and costs £39.95.

AMS publishes Super Art (£49.95) and 3D Zicon (£24.95), 166-270 Wilderspool Causeway, Warrington, WA4 6OA.

3D Graphics Development System can be obtained from Glentop Publishing, Bath Place, High Street, Barnet EN5 5XE, £25.

Double density disc interface

Solidisk very popular Double Density Disc Filing System (DDFS) is based on the WD-1770 floppy disc controller, the same chip used on the Beeb-Plus and the Master series, totally hardware compatible with Acorn 1770 DFS and ADFS ROMs. The DDFS is suitable for virtually any type of floppy disc drives, 3½" and 5¼", 40 track and 80 track, single and double-sided with or without power supply unit. New low price without DFS ROM




(order as XR/DDFS)

1770+8271, dual floppy disc controller interface

Solidisk DFDC (1770+8271) is the best seller in disc upgrades for Model B's already fitted with an INTEL 8271 chip (Acorn, Watford, Pace, Viglen, Cumana etc). It plugs into the 8271 socket with the latter relocated on the DFDC itself. This is the


most convenient way of adding the modern and powerful 1770 without sacrificing the 8271 chip. The DFDC is fully hardware compatible with both Acorn DNFS 1.2 and ADFS ROMs, as well as Solidisk DFS 2.2 and ADFS 2.1 ROMs. The Acorn DNFS 1.2 is recommended for use jointly with the Solidisk ADFS 2.1 as both systems 'selffrugalise' to keep PAGE at the lowest value. We recommend the DFS 2.2 ROM alone if ADFS is not required. New low price without DFS ROM£40.00 (order as XR/DFDC)



Low cost 3 1/2 inch disc drives

The new generation of THIRD HEIGHT 3 and a half inch Floppy Disc Drives offers unprecedented value for money. They feature Double-sided, 80 track per side mechanism offering up to 640K per disc in double density and ADFS. Low power, large capacity, extremely quiet mechanism, robust media and LOWER PRICE than 5

and 1/4 drives make them irresistable. They are also the newly adopted Acorn disc standard. Cased, all leads. One year guarantee.
Order as 3.5 INCH-DRIVE (80 track/Double-sided)£90.00 FREE demonstration diskett (double sided) in DFS format while stock lasts (containing a Database, a Word-processor and a selection of games and disc utilities). Separate power supply for BBC Model B, issue 2 or



Special leads

Order as 3.5/PSU.

Electron is available at £25.00.

A Special set of leads to connect TWO drives in ANY combination of $5\frac{1}{4}$ and $3\frac{1}{2}$ drives is available separately at only £15.00 or only £8.00 surcharge if supplied in lieu of standard leads. Order as SPECIAL LEADS.

Advanced disc filing system ROM-set (two 16k EPROMS) version 2.1

The finest product yet for any BBC computer fitted with the 1770 Floppy Disc Controller (Model B, Plus and Master 128K and Electron) encompassing many Master 128K specifications. The list of features is so extensive that it would require a lot more space to describe it. In brief, it has ALL the features of the 2.2 DFS ROM except device drivers for the INTEL-8271 chip, full ADFS implementation comparable to the MASTER 128K. Plus ADFS-FORMAT (FORM40, FORM80

and FORM160) and VERIFY. Plus MVDFS and MVADFS to transfer files between DFS and ADFS formats with automatic PAUSE for disc change rendering possible to operate with a single drive. Low PAGE value. Compatible with 6502, Z80, 32016, 80186 (Master version) Second Processor. Two manuals.

Normally £30.00 but if order with DDFS or DFDC only £20.00 Please mention computer model when ordering. Order as ROMS2.1S. Also available on a single 32K EPROM as ROM2.1/32.



Single and double density disc filing system ROM version 2.2

The most powerful and versatile DFS ROM available for the BBC model B, the BBC Plus and the Master 128K. Suitable for both 8271 and 1770 Floppy Disc Controller. Double density allows up to 60% increase over conventional format or 640K storage per (80 track double-sided) disc. Extensive features include 40 and 80 track software switch, unlimited filenames in catalogue (as opposed to Acorn 31), automatic Read after Write. It works with Z80, 6502 second processors and Econet and also is very fast on comparative review benchmarks.

Built-in commands include
FORMAT (F40 and F80), VERIFY,
DZAP, MZAP, RECOVER,
RESTORE, WORD, RTRACK,
WTRACK etc... Also, ENABLE
M allows IBM PC discs to be read
or written to. Extensive User
Manual covers many technical
details. Supplied on 16K
EPROM.

Normally £15.00 but if order with DDFS or DFDC only £10.00 Please mention computer model when ordering. Order as ROM2.2.



Unbeatable quality 5 and $\frac{1}{4}$ inch disc drives

Also available are NEC or MITSUBISHI 5 and ¼ inch, 80 track, double-sided drives at a very attractive price. Cased in matching cream colour, all leads. Only£109.00





Free bridge unit for twin drive systems

If you pay for two drives on a single order, we will offer you, absolutely FREE this practical BRIDGE unit. Solid steel construction, suitable for all Models of BBC and Master 128K.

INEXPENSIVE PC CONNECTION

80186 CO-PROCESSOR 4 DISCS MOUSE ONLY £239 INC. VAT!

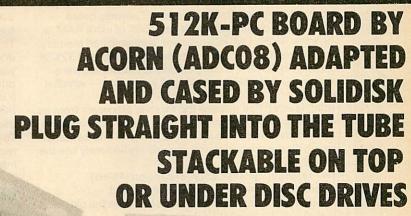

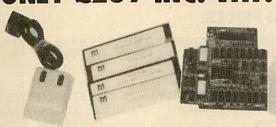

THE PC-500 consists of a Master 512 Internal Upgrade and a Tube adapter, all housed in the same case as a standard half-height disc drive. It's easy to stack the PC-500 on top or under your 5½ inch disc drives. Connecting the PC-500 to the Beeb is by means of 24 inches of flat ribbon to the Tube connector, like the Z80 or 6502 second processors. An ON/OFF switch and indicator are also included.

What you get for £239:

- 80186 CPU running at a clock speed of 10MHz. 512K RAM, 16K ROM.
- Mouse.

 4 discs (80 track double sided, double density) containing DOS+, the GEM collection, Winchester initialiser, RAM disc, CP/M emulator, file transfer and format conversion programs. . Literally dozens of utility programs, too many to list



What you need to run the PC-500:

— BBC issue 3 to 7, MOS 1.2.

— Solidisk DDFS or DFDC with 2.1 ADFS ROM or Acorn 1770 with ADFS. Opus 1770 Double Density users will have to pay £20 extra for Solidisk ADFS version 2.1 OP ROM set.

— TWIN 80 track, double sided, double density 5½ inch disc drives (Mitsubishi, NEC, TEAC, Matsushita or Sanyo). You may use the Solidisk 3.5" drives but will have to pay extra for disc copying service (£10 for 4 discs). 40 track double sided drives will require a special solidisk ADFS ROM set (Version 2.1PC, £25) and disc copying service.

and disc copying service.

— Solidisk Real time Clock (£30). DOS+ will take date and time directly from the RTC instead of prompting you each time

Software that runs and software that don't:

The majority of PC and CP/M software (40,000+ titles) for both the 8088 (and family) and the Z80 will run. All generic software (MSDOS 2.1, DOS+ and CP/M 2.2) eg Wordstar, DBASE 2, Supercalc etc will run, special machine dependent packages won't (eg Locoscript on the Amstrad PCW's). File transfer is even better, you can copy, edit or process files from virtually any kind of discs, from IBM to Amstrad, provided that you have suitable disc drives. Extra software may be needed in some cases. Ring Solidisk Technical for advice.

DOS+ and the GEM collection:

DOS PLUS is becoming the dominating Disc Operating software for 16 bit computers. It is media compatible with PCDOS and MS DOS (2.1). Furthermore, Acorn's implementation has automatic

media sensing and a CP/M emulator. Discs from IBM PC, Amstrad, Apricot, BBC Z80 etc. can be read on your computer, and copied into your format. The GEM collection consists of GEM WRITE (a wordprocessor), GEM PAINT (a graphic drawing and painting program) and GEM DESKTOP (a mouse driven disc menu).

Compatible Disc Drives:

Two problems: disc size (5½, 3.5 and 3 inch) and disc format (single and double density, 40 and 80 tracks, single and double sided). You can READ andWRITE40-track discs with an 80-track drive, But if a 40-track disc is written to by an 80-track drive, the resulting disc cannot be READ reliably on a true 40-track drive. The 40/80 track switch that you may have onyour 80-track drive will not help, because true 40 track read/write heads have a gap nearly twice as large by comparison. If you have to write to IBM PC discs, you will have to buy a compatible drive such as the Solidisk FD400 series (£109).

Public Domain Software:

Solidisk's PC unit is setting up a Public Domain Software User Group to provide PC-500 users with an inexpensive source of Public Domaine Software and Shareware. First year membership is free to all PC-500 owners. PDS discs and manuals are available at the same prices as with Solidisk Sideways RAM software.

SOLIDISK SALE

Electron Disc Interface:

This unit (EFS) plugs into the PLUS-1 Expansion and allows connection of a twin disc drive system and a Winchester. The Disc Interface is based on the same

WD1770 chip as used on the Beeb.

The Electron Disc Filing System software in ROM (32K) is a version of the Solidisk ADFS 2.1 thus offers a large degree of compatibility with Beeb software. The system

Use a disc system with built-in power supply unit.

Old Style SWR32 and 128K:

This exceedingly popular system (30,000 plus units sold) enables the Beeb user to load one or two ROM images into the Beeb, make a 16K printer buffer, use DFS with PAGE at &EOO, play games, run bigger BASIC, store music and inumerable other uses as supported by

a library of 15 software diskettes.

The SWR32 system consists of a BASE UNIT which

plugs into the rightmost ROM socket on the BBC board and a (exchangeable) RAM CARD. The RAM CARD also has extension socket for a piggy-back memory board capable of bringing the extra memory to 128K bytes of RAM

This system is now superseded by the new FOURMEG series and therefore offered at a knock-down price of ONLY £20.00 for a complete unit, excluding software. The 96K add-on piggy-back memory board is also greatly reduced.

Order as SWR32 Order as SWR128 (SWR32 with 96K

extension) £50.00

NB: Manual supplied but software (not strictly required) not included.


The supportive software is a series of 15 diskettes available on either 40 or 80 track DFS diskettes. You can available on either 40 or 80 trackUPS diskettes. You can buy any number of VOLUMES although we recommend you buy by PACK of FIVE volumes. PACK 1 (volumes 1 to 5) contains general applications such as MENU, PRINTER, DFSOEOO, SILEXICON etc. PACK 2 contains programming applications (SOLIMON, SOLITRACE, TELETEXT EDITOR, SPRITES, DFS and ADFS etc). PACK 2 contains explicitly computer games. Fach diskette is 3 contains exclusively computer games. Each diskette is priced at only £2.00, software PACK is £10.00 for 5 diskettes

 Order as VOL. XX
 £2.00

 Order as SOFT/PACK 1 or 2 or 3
 £10.00

Secondhand Refurbished Beebs:

As a result of the Solidisk MASTERPLAN, we have to As a result of the Solidisk MASTERPLAN, we have to dispose regularly of SECONDHAND, refurbished, complete with Double Density DISC INTERFACE, thoroughly checked and fully guaranteed (Labour only) BBC Model B's. Price vary with issues and ages, commencing from £150.00. Please ring.

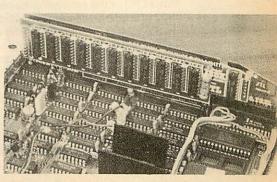

SOLIDISK FOURMEG 256K

The memory limit on the BBC micro can now be definitely a thing of the past. The new Solidisk Fourmeg board offers all you could wish for. It has 256K of extra RAM, a superfast 4MHz CMOS processor, sophisticated memory management sockets for high capacity ROMs and 32K of software in ROM. It is compatible with most hardware add-ons — except Sideways ROM expansion — which it replaces.

Fitting is easy. You remove the existing processor from its socket and plug the new board in its place, push on three colour-coded wires, clip on two mini hooks and its ready. Switch on the computer and you will immediately see the difference.

The message "Solidisk 256K expansion (4MHz)" announces the new memory size and speed. A switch at the back lets you select between the old (2MHz) and the new (4MHz) speed.

The BBC micro at 4MHz easily surpasses the new Master 128K on benchmarks.

For example, it runs the benchmark using Basic 4 in only half the time taken on the Master 128K.

If you have too many Roms to plug in at once, the Fourmeg 256 offers two ways out. Firstly, it includes additional high capacity (and fast) ROM sockets. Moreover, two four normal ROM images can be stored in one high capacity ROM chip (by "vertical paging") — so more can be made immediately available to your fingertips.

Secondly, ROM images can be stored on disks and loaded into any one of the eight Sideways Ram banks available. If you need more room in "languages" such as VIEW or BASIC, you may use any of the eight SHADOW RAM banks. No user memory is then lost to the screen, whatever the screen mode.

You can turn the extra memory into a RAMDISC or a

printer buffer by simple star commands. A Silicon disk of 200K, compatible with both the Solidisk DFS and ADFS formats replaces then one of the 4 physical disc drives. The Ramdisk is at least 10 times faster than physical disk drives and has no moving parts. The printer buffer saves you time, it lets you use the computer while feeding your printer in the background.

It is the most logical next step for owners of any Sideways ROM board or Solidisk Sideways Ram, who can trade in their present boards for the excellent Fourmeg 256. To complement such a powerful product, Solidisk recommend Computer Concepts Wordwise Plus and Interword.

BEEB 256 PRICES:

TWO MEG 256, 16K MANAGER ROM	£115.00
TWO MEG 256, WITH WORDWISE +	£145.00
TWO MEG 256, WITH INTERWORD	£165.00
FOURMEG 256, WITH WORDWISE+	£165.00
FOURMEG 256, WITH INTERWORD	£185.00
ROM board TRADE IN discount	£30.00
Post and packing	£2.00



Shadow Sideways ROM and Sideways RAM All in One for £50:

This board, the TWOMEG 32K, is specifically designed with the school BEEB in mind so that one can have everything required on a single, compact and extremely easy to install unit. All the necessary software is in a MANAGER ROM (supplied).

The top row of five ROM sockets will take software ROMs, up to 32K each, such as used on the BBC Plus and the MASTER 128K.

The middle row contains 32K of additional CMOS, low power RAM, acting as Shadow Ram or as two banks of Sideways Ram.


The empty 40 pin socket will receive either the normal 2MHz CPU or the optional enhanced, faster 4MHz CMOS 6502 (the board will then be called the FOURMEG 32K). The TWOMEG 32K combines the usual functions of a Sideways ROM board — offering storage for up to 160K on board and 64K on the BEEB itself (a total of 224K out of 256K possible) and a SHADOW RAM compatible with major language ROMs such as BASIC, VIEW, WORDWISE, INTERWORD, VIEWSHEET, VIEWSTORE etc.

When Shadow Ram is in use, a small 8K of Sideways RAM is available for loading ROM images or a small printer buffer. When SHADOW RAM is not in use, the entire 32K additional RAM can be used as two banks of SIDEWAYS RAM or as a RAMDISC (available only with

Solidisk DFS or ADFS). The Manager ROM also contains a Toolkit to assist programming in BASIC.

The attraction of the TWOMEG-32K board comes from its versatility, its convenient software in ROM and its low pricetag. Furthermore, the board can be fitted with a CMOS 65C02 capable for example of running the new BASIC 4 (some 30 per cent faster than BASIC 2 and also more accurate) or upgraded to FOURMEG speed, comparable to the TURBO board on the Master.

Twomeg 32K	£50.00
65C02 (2MHz) for the above	£10.00
Or upgrade to fourmeg	£25.00
Fourmeg 32K	£70.00
Post and packing	£2.00

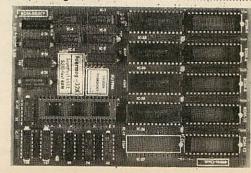

Г			
	MASTER	SEDIES.	
	A STATE OF THE STA		499.00
	AMB15 ADB12	Master 128 Master ET	399.00
	ADC06	Turbo Upgrade 80126/512K	125 228.00
	ADC08 ADF13	Eprom cartridge	14.95
	become the		
	MANUAL	S AND DOCUMENTATION:	
	ADJ22 ADJ23	Ref manual Pt 1 Ref manual Pt 2	14.95 14.95
	MASTER	COMPACT SERIES:	
	ADB20	Master Compact Single drive	441.25
	ADB20+ADF30 ADB20+ADF31	Master Compact S/D with TV mod. Master Compact S/D with Mono monitor	457.35 537.85
	ADB20+ADF32	Master Compact S/D with Colour monitor	687.35
	ADF15	RS232 kit Second 3.5" floppy drive	29.90 113.85
	ADF16 ADF17	PAL TV Adaptor	29.90
	ACORN S	SOFTWARE:	EXECUTE
	SUB27	Viewstore database ROM Pascal	59.80 69.00
	SUB18	FORTH	19.90
		LISP MICRO-PROLOG	19.90 79.95
	SOLIDIS	K SOFTWARE ROMS:	经 等源。
	PCFS	Compatible with PC and MS DOS discs	15.00
	PCMAN	MANUAL FOR PCFS single and double density DFS ROM for	5.00
	CDFS	the COMPACT	10.00
	MADES	DFS and ADFS ROM (32k) for the Master communication ROM for the Master	20.00 10.00
	LMS SOLIMON	Machine code monitor for Master/Compact	10.00
	INSIGHT UVP	Intelligent disassembler, XREF Eprom programmer software (8k)	20.00 5.00
	The state of the s		
	ECONET	PRODUCTS:	100
	ADF10	Econet plug-in	49.99
	AEH17 AEH18	100m Cable 10station lead set	99.00 29.00
	AEH19	Econet starter kit	99.00
	AEH20 AEH21	Econet bridge Econet socket kit	199.00 29.95
	AES21	Level 2 Fileserver	249.00
	AES22	Printer server ROM	49.00
The same of	DISC DR	IVES:	
	FD35	3.5" 80-track double-sided single drive	£100.00
	TWIN35	Twin DF35	£200.00
	FD525 TWIN525	5.25" 80-track double-sided single drive Twin FD525	£115.00 £230.00
	20MB	Winchester new model, low cost SEAGATE	£700.00
			The state of the s

FD35 TWIN35	3.5" 80-track double-sided single drive	£100.00 £200.00
FD525	5.25" 80-track double-sided single drive	£115.00
TWIN525	Twin FD525	£230.00
20MB	Winchester new model, low cost SEAGATE	£700.00
PRINTE	RS:	
LX86	EPSON LX86 + 2M printer lead	249.00
LXTF	LX80 Tractor Feed	31.30
LXCSF	LX80 Cut Sheet Feeder	53.53
FX85	EPSON FX85 NLQ + 2M printer lead	350.00
FXTF	FX85 Tractor Feed	30.59
FXCSF	FX85 Cut Sheet Feeder	123.50
NL10	STAR 80 col-120 cps par. 2M lead	289.00
NLCSF	Cut Sheet Feeder for NL-10	59.99
NLRIB	Black Ribbon for NL 10	5.64
MP165	Tractor and pich feed, 165 cps, NLQ,	
	2M printer lead, exceptional value	260.00
EPSRIB	Black ribbon for Epson and MP165	4.00
J6100	JUKI 6100 Daisy Wheel + 2M printer lead	340.00
JURIB	JUKI 6100 black vinyl printer ribbon	2.00
PAPER	2000 sheets cont. paper, A4 size 11" x 9.5"	14.00
MONIT	ORS:	
BM7502	12" Philips hi-res green screen, lead	85.00
BM7522	12" Philips hi-res amber screen, lead	86.00

14" hi-res Colour Monitor, lead

12" TAXAN Supervision 3, hi-res RGB Colour, lead 12" TAXAN Supervision 2, Merdium-res RGB Colour

monitor, lead 14" Mitsubishi RGB colour monitor, lead

5 software discs, 80 track. Database,

5 software discs, 80 track. Games. 5.25" format

spelling checker, machine code monitor, Macro Basic etc. 5.25" format

CM8533 TAXAN3

TAXAN2

XC1404

SWPK1

SWPK2

SOFTWARE PACKS:

3.5" format

3.5" format

MD525	51/4" low cost VEREX for all drives	12.00
MD557	51/4" hi-rel MD557, Verbatim DSDD 96tpi	25.00
C102	3.5" low cost Verbatim for all drives	20.00
C103	3.5" hi-rel 90097M Vertbatim DSDD 135 tpi	28.00
C104	3" CF2/MSOFT for all Amstrad drives	39.00

ADF13	Acorn Eprom cartridge for two 27128	14.95
EPR32	Solidisk Eprom cartridge for one 27256	8.00
RAM32	Solidisk 32K RAM cartridge with battery	
	backup and write protect switch	25.00
MEGA256	Solidisk 256K Mega-RAM card with RAM disc	
	and printer buffer in ROM	100.00
MEGA256	Solidisk 1 Megabyte Mega-RAM card with	
	RAM disc and printer buffer in ROM	POA
	Expected price in April/May	225.00

EXTRA DISCOUNT

If you buy a disc drive or a printer or a monitor at the same time you buy a Master or a Compact, you are qualified for SYSTEM DISCOUNT and a free Software Pack 1 (worth £10.00 or more).

Norn	nal Package Sys	tem		
Price	Disco	ount		Reduction
£600	-£699	3%		£18-£21
	-£799	4%		£28-£32
	-£899	5%		£40-£45
	-£999	6%		£54-£60
D 2007-957-959	O and above	7%		£70-£££
Exan	nple of system	normal price	Discount	Net price
1	Compact Mono + MP165 printer	797.8	31,95	765.94
2	Compact Colour + Juki 6100	1027.3	71.89	955.11
3	Master 128 + twin F/Drives	729.00	29.16	699.84
4	Master 128, twin F/Drives,			
	CM8533 Colour monitor	1028.00	71.96	956.04
5	example 4 + MP165 printer	1288.00	90.15	1197-84
	Master 512 + twin F/Drives	957.0	57.42	899.58
6	Master 512 + twin F/Drives,			
10	plus 20 MB Winchester	1657.0	115.99	1541.01

SECONDHAND BEEB AND UPGRADE TO MASTER:

We buy and sell good condition second hand Beebs, even by post. Proof of original purchase is required if you are only selling your computer. Reduced commission is available if you are UPGRADING your BBC to a Master, ask for a MASTERPLAN

BBC Model	we buy at	we sell at
B-issue 2	131	175
B-issue 3	191	225
B-issue 4	187	250
B-issue 7	225	300

The prices above are given as average for very clean and good condition machines. Please ring for stock allocation before you call.

ORDERING BY POST:

All items can be ordered by post, sending the coupon below and enclosing cheques, POs, drafts or credit card numbers or by phone. P and P is charged as follows: Less than 1 KG (eg software, cartridges and books): £2.00 Up to 3 KGs (eg single disc drives): £3.00 Up to 3 KGs (eg computer, monitors, printers, twin disc drives): you can specify either parcel post £6.00 or courrier/Datapost: £12.00. Above 10 KGs (eg complete system), please either allow generously or give us a ring for custation.

auotation.

ORDER FORM	
Please fill and send to: Solidisk Technology Ltd	
17 Sweyne Avenue Southend-on-Sea, Essex SS2 6JQ	
Name:	
Address:	
Items:	
Price:	
Total:	
Access/Barclay:	

Solidisk Technology Limited, 17 Sweyne Ave, Southend-on-Sea, Essex SS2 6JQ.
Tel: Southend (0702) 354674 (16 lines).

299.00

375.00

315.00

260.00

£10.00 £15.00

£10.00 £15.00

USER PORT INTERFACE

Plugs into the User Port. Provides 4 optically isolated, TTL compatible, switched input and 4 relay switched output lines, rated at 0.5A 50V. LED indicators on all inputs and outputs. Easily programmed in Basic. Ideal for all control applications, robotics, experimentation.

Uncased

STEPPER MOTOR CONTROLLER

Plugs into the User Port. Will control one 4 phase 12V stepper motor. All control lines optically isolated. Full software control of step and direction. Easily programmed in Basic. Up to 4 controllers can be linked together.

Cased Uncased Uncased less cable

STEPPER MOTOR

Model ID35 12V 4 phase 48 steps

All prices are inclusive. Write for full details.

Capital City Electric. 39 Oakley Rd, Chinnor, Oxford OX9 4HY.

MICRO

FAST REPAIRS FOR THE BBC MICRO BY THE ACORN APPROVED SERVICE CENTRE 191 FRESTON ROAD, LONDON W10 6TH PHONE: 01-968 9214

- Repair centre for BBC B, B + , Electron, disc drives etc.

 We have been Acom service specialists for 3 years and are justifiably recognised as experts in this field.

- BBC micro repairs: average cost £15-£20.
 Complete disc drive calibration: £15/drive.
 Upgrades: Disc £65 inc. installation.
 Econet £65 inc. installation.

- Econet £65 inc. installation.

 Other upgrades carried out as required.

 All repairs fully guaranteed.

 Insured return carriage if required.

 Extended warranties available on most equipment.

 Extended warranties available on most equipment.

 Low prices for Mitsulshi disc drives and Acorn peripherals.

 Acorn authorised Econet support centre. Expert installations and trouble-shooting.

 Express service by prior arrangement.

 Opening hours: Normally Mon, Tues 9.30am-6pm, Weds-Fri 10am-4.30, but phone first.

RING 01-968 9214 AND ASK FOR MARK DUFFILL

STAR-SOFT (BBC & ELECTRON SOFTWARE LIBRARY)

We are a specialist BBC & Electron library with over two years experience,

we know the market.

We stock arcade, educational & business software. We also specialise in adventure games.

Large selection of software inc. disks
Hire rates from **75p** for 14 days.
Take the **Star-Soft** option and join our computerized library Fast service at the cheapest prices around. Send stamp for catalogue and cheque/P.O for £6 to cover membership.

Please state BBC or Electron

STAR-SOFT
16 Martland Cresc, Beech Hill, Wigan, Lancs. Tel: 094247574

MAKE YOUR MICRO EARN!

Yes, making money becomes incidental when you know how. Your micro is, if only you knew it, a gold mine, the size and make is irrelevant.

Make the initial effort NOW by starting your own

HOME BASE BUSINESS

Remember: You'll never get rich digging someone else's "ditch".

It's more rewarding than playing games.

The benefits are many and varied. Full or part time, for FREE details S.A.E. to.



97 Pilton Place (AU3) King and Queen Street Walworth, London SE17 1DR



SOFTWARE Suitable for standard and Master Series Computers CASHBOOK Double Entry bookkeeping in memory for clubs CASHBOOK Double Entry random access disc bookkeeping for clubs Business £22.95 ACCOUNT Double Entry random access bookkeeping with credit control, statements, ledgers and analysis for businesses £34.45 ****NEW****ACCOUNT PLUS as above with data sort, auto statement generator, invoice, order. quotations etc. mail shot merge MICRO-TRADER The complete BBC accounts system. Demo disc £12.50 MICRO-STOCK 4000 items suitable for use with Micro-Trader £57.50 £230.00 £86.25 RANDOM MAILING mail merge, 5 sorts, 1, 2, or 3 across labels £34.45 EXTENDED PAYROLL "Impressive package – Micro User" 1, 2, 4 weekly & monthly, contracted in & out, 3 overtime, personnel file, 2 payslip formats, plus, plus £57.50 *** SPECIAL THREE STAR OFFER - ALL THREE STAR PROGRAMS £79.95 FAMILY TREE 340 people 100 marriages. Ancestral, descendant & genealogical tracing with full tree printout, sorted IGI list. See Review in Feb Issue Genealogy £19 95 Statistics STATPACK the stats package for students, 30 results £13.75 CARETAKER utility "If you write BASIC you need it" PRINTMASTER utility "Beats the best!" ROMS £29.90 £29.90 INTER-CHART data display "Quite clever – well very clever" INTER-SHEET spreadsheet "Not bad! – it's the best" INTER-WORD "The WISIWYG super wordprocessor I use & teach." £29.99 £44.99 £47.00NEW* SPELL the fastest, largest, most comprehensive spelling checker WORDWISE PLUS "Programming facilities that others haven't got" SYSTEM DELTA "The cleverer than clever program language database" £54.95 £44.99 £62.95

SYSTEM DELTA extended programming language manual £19.95
 EPROMMERS
 EPROMS 27128 16k £3.25 : 2725

 UVIPAC Eprom Programmer 9 & 16K £20.95 : 32k Programmer
 27256 32k £20.95 UVIPAC Eprom Eraser £20.95: Toolkit Eprom Software £7.95 BASIC BBC BASIC for IBM pc compatible as you are used to it
AMSTRAD PCW8512 complete with printer & software £99.95 £429.95 AMSTRAD PC1512 Dual Disc Drive Mono complete with software £625.00 AMSTRAD PC1512 Dual Disc Drive Colour complete with software EPSON P40 80 column dot matrix beautiful quality print £798.99 PRINTERS \$45.00 CITIZEN LSP-10 120cps NLQ 38 cps. Many features. Save £91.00 RIBBONS, FX, RX, LX-80, 120D, GLP, Amstrad Shinwa from PRINTER CABLE suitable for BBC/Electron to parallel printers £225.00 £3.50 £7 95 DISCS DISC DRIVE 800k Opus twin double sided cased £225.00 DISCS 5.25" Double sided & density 40/80 tracks. 5 colours in box Box 2000 fanfold perforated 11" x 9.5" 60 gsm (None cheaper?) £10.95 LISTING PAPER £12 95 Box 2000 fanfold micro-perforated 80 A4 gsm (None better?) Epson P40 Thermal paper – 5 rolls For Mailing 1000 1 across 3.5" x 1.4375 £22.95 \$9.95 LABELS £6.50 For Mailing 2000 2 across 3.5" x 1.4375 For Mailing 1000 3 across 2.75" x 1.4375 66 50 For Disc labelling 1000 1 across 5" x 15/16" £4.95

> Ask for brochure for more software and further details Prices include VAT. Add 57p for p&p. Printers add £9.95

PROTECTOR VIZIFLEX Model B only Grease, dirt & waterproof in use

PAYROLL

Extended Payroll was released in 1985 and was instantly adopted by 50% of our existing Payroll users who knew what they were talking about. After all level headed businessmen don't throw good money after bad do they. Whilst no program is perfect the success of Extended Payroll has proven without doubt that we have got it just about right.

Payroll offers random access disc facilities with either one or more drives and the option to print out payslips or not in two different styles. Even if you have a disaster and your printer breaks down you can still copy the pay by hand. We think about these things because it has happened to us!

There are weekly, fortnightly, four weekly and monthly pay options as well as 3 overtime rates, hourly pay, automatic standard pay, holiday pay, sick pay and bonus pay. All N1 and tax codes as well as refunds are catered for. Included in the program is a personnel file on every employee.

Period summaries are printable each pay day and at any time you wish. Automatic P7X form updates are covered and Inland Revenue payment amounts are resettable at the end of each period. At year end all records can be re-set for new year use.

An annual update service is offered to enable you to maintain your payroll for £7.50 + VAT.

BUY NOW AND START THE NEW TAX YEAR RIGHT

£49.95 + VAT (Please state disc size)

(AU), 25 Fore Street, Praze, Camborne, Cornwall TR14 OJX or Telephone 0209-831274 with ACCESS or PRESTEL *2582020

Micro-P

£19.95

KEYBOARD

User Dump – Acorn User's printer control



Dump graphics screens with User Dump

User Dump includes a ROM chip which plugs into any free sideways ROM socket on your BBC micro, and an easy-to-follow manual. With the User Dump ROM installed you'll have access to a wide range of commands to help you control your printer's facilities - all for just £19.95.

You will be able to dump any screen image in any display mode by entering a single command - either as a line of your program or alternatively by typing in


direct from the keyboard. User Dump will also give a perfect dump while a machine code program is running.

This versatile ROM will work with all the popular dot-matrix printers, including all those with single and double density bit-image graphics.

Send an A4 SAE to Seran at Redwood Publishing, 141-143 Drury Lane, London WC2B 5TF, for more details.

Order form on page 136.

User ROM - Acorn User on a chip only £19.95



The Acorn User UserROM brings the best of Acorn User into your micro. Put together by our technical editor, Bruce Smith, this 8k ROM chip is packed with your favourite Acorn User routines. Simply plug the ROM chip into a sideways ROM socket and all the routines are instantly accessible via easy-to-use *commands what could be simpler?

Routines include the popular colour fill and dot fill routines, bad program recov-

ery, variable lister, function key lister, a graphics compiler, a circle drawing routine, sound compiler, plus lots, lots more!

Included with UserROM is a 22-page manual which explains how to get the most from your UserROM, and you'll find many demonstration programs showing how to use the new commands.

Full details available by sending an A4 SAE to Seran, Redwood Publishing, 141-143 Drury Lane, London WC2B 5TF.

Acorn User Assembler Extension ROM just£19.95!

TRIP (fsp) ((:)) K 104.0,0 to disable andition: On

AXR for machine code programmers

The AXR ROM is aimed at the machine code programmer. It adds a variety of assembly options and commands to the Basic assembler, including:

- New options controlled via OPT
- Assemble from disc or memory
- Assemble to disc or memory
- Branch to jump
- Enhanced error checking and reporting The AXR also adds several new pseudo op codes to the assembler these are: ORG -

sets assembly origin, DST - specify destination, DFR - define real numbers, DFX define byte, word, double word, SWR send assembly to sideways RAM.

The AXR also allows full Basic expression evaluation, the use of binary numbers (eg, %01100110). A disassembler is included, and all the 65CO2 instructions can be used (including BBR,SWB etc.). The ROM is compatible with both Basic 1, 2, and Master.

Order form on page 136 - 24 hour telephone service (0672) 40825

Acorn The choice of experience.

COMPACT SOFTWARE

	the state of the s
BLUE RIBBON	
Games Disc I	£12.95
Games Disc II	£12.95
CDS	212.55
Birdie Barrage Golf	010.05
Steve Davies Snooker	£12.95
	£12.95
MICRO POWER	
Dr Who and the Mines of Terror	£9.95
Micro Power Magic	£9.95
SQUIRREL	
Games Disc	£14.95
SUPERIOR	
Repton III	£14.95
Galaforce	£14.95
Karate Combat	£14.95
Repton 2	£14.95
Strykers Run	£14.95
Speech	£14.95
Citadel	£14.95
Acorn Hits Volume I	£14.95
Acornsoft Hits Volume II	£14.95
TYNESOFT	
Commonwealth Games	£11.95
Mousetrap	£11.95
US Drag Racing	£11.95
Vindaloo	£11.95
Winter Olympics	£11.95
and any any and any	211.00
EDUCATIONAL	
EDUCATIONAL	
HIGHLIGHT	
Comp I	£19.95
Comp II	£19.95

ELECTRON SOFTWARE

GAMES/ADVENTURES

CAMILEO/ADVICTORILES	
MICRO POWER	
Micro Power Magic	£7.95
Ghouls	£7.95
Swag	£6.95
Felix Meets Evil Weevils	£6.95
Killer Gorilla_	£7.95
Felix in the Factory	£7.95
Moonraider	£7.95
Adventure	£7.95
Galactic Commander	£7.95
Bumble Bee	£6.95
Chess	£7.95
Croaker	£7.95
Cyberton Mission	£7.95
Danger UXB	£7.95
Electron Invaders	£7.95
Escape Moonbase Alpha	£7.95
Frenzy	£6.95
Felix & Fruit Monsters	£7.95
Gauntlet	£6.95
Jet Power Jack	£6.95
Rubble Trouble	£6.95
Stock Car	£6.95
The Mine	£6.95
AARDVARK	
Frak	£7.90
ACORNSOFT	
Plus 3 Games Pack Disc	£19.95
Elite	£12.95

ELECTRON SOFTWARE CONT:


ELECTRON SOFTWAR	E CONT:
ALLIGATA Action Pack	£4.99
AUDIOGENIC	
The Last of Free BBC/Ele Thunder Struck BBC/Ele	£7.95 £7.95
Psycastria BBC/Electron Bug Eyes II	£7.95 £7.95
BBC PUBLICATIONS	
White Knight MkII BEAU JOLLY	£9.95
Five Star Games Computer Hits III	£9.95
Computer Hits 2	£9.95 £9.95
Computer Hits (10 games) BUG-BYTE	£9.95
Skyhawk BBC/Ele Cricket	£2.99
Jack Attac	£2.99 £2.95
Savage Pond Roboto	£2.95 £2.95
Twin Kingdom Valley DOCTOR SOFT	£2.95
Phantom Combat	£9.95
I.J.K. U.K. — P.M.	£4.95
IMAGINE	14.90
Yie Ar Kung Fu MELBOURNE HOUSE	£8.95
Dodgy Geezers BBC/Ele	£8.95
Exploding Fist MIRRORSOFT	£9.95
Strike Force Harrier	£9.95
OCEAN Mikie	£8.95
SUPERIOR SOFTWARE Ravenskull	00.05
Repton III	£9.95 £9.95
Thrust BBC/Electron Karate Combat BBC/Electron	£7.95 £8.95
Citadel Repton II	£9.95 £9.95
SUPERIOR/ACORNSOFT	
Galaforce TYNESOFT	£9.95
Future Shock BBC/Ele Goal BBC/Ele	£7.95
Jet Set Willy BBC/Elec Winter Olympics BBC/Elec	£7.95 £7.95
Winter Olympics BBC/Elec US GOLD	£6.95
Impossible Mission BBC/Ele	£9.95 £7.95
Questprobe Beach Head	£7.95 £8.95
VIPER Sim BBC/Electron	£7.95
EDUCATIONAL	17.95
MICRO POWER	
Which Salt? Where?	£6.95 £6.95
ASK — BBC/ELECTRON	a de la companie de l
The Best Four Programs— Maths	£19.95
Language	£19.95
BUSINESS SOFTWARE Guest Sense (Hotel and Guest	House
package for BBC + Amstrad)	£172.50
FIX Sense (Fixed asset packag for BBC + Amstrad)	£172.50
TER Sense (A *personell* pack for BBC + Amstrad) We also have a full hotel	tage £172.50
We also have a full hotel package called Inn Sense	P.O.Ą.

BBC SOFTWARE

MOSAIC/LEVEL 9 The Secret Diary of Adrian Mole Disc £12.95 SLIPPERY SLUG Kerney Support Movie Maker £29.90 SUPERIOR \$29.95 Ravenskull £9.95 Repton III £9.95 Strykers Run £9.95 Strykers Run Disc £11.95 Thrust Disc £11.95 Thrust BBC/Electron £7.95 Karate Combat Disc £11.95 Karate Combat BBC/Electron £8.95 Citadel £9.95 Citadel Disc £11.95 Repton II £9.95	BBC SOFTWARE	
Dr Who Mines and the Mines of Terror Master B + Micro Power Magic 40 Track £7.95 Mirro Power Magic 40 Track £7.95 MIRRORSOFT £12.95 Strike Force Harrier £9.95 Strike Force Harrier Disc £12.95 Hi-Bouncer £6.95 MOSAIC/LEVEL 9 The Secret Diary of Adrian Mole Disc SLIPPERY SLUG Movie Maker SUPERIOR £29.90 Ravenskull £9.95 Ravenskull Disc £11.95 Repton III £9.95 Revenskull Disc £11.95 Strykers Run £9.95 Strykers Run Disc £11.95 Thrust Disc £11.95 Thrust BBC/Electron £8.95 Karate Combat BBC/Electron £8.95 Karate Combat BBC/Electron £8.95 Karate Combat BBC/Electron £9.95 Repton II £9.95	GAMES/ADVENTURE	
of Terror Master B+ £9.95 Micro Power Magic 40 Track £7.95 MIRRORSOFT £12.95 Strike Force Harrier £9.95 Strike Force Harrier Disc £12.95 Hi-Bouncer £6.95 MOSAIC/LEVEL 9 The Secret Diary of Adrian Mole Disc SLIPPERY SLUG Movie Maker SUPERIOR £11.95 Ravenskull £9.95 Repton III £9.95 Repton III £9.95 Repton III £9.95 Strykers Run £9.95 Strykers Run Disc £11.95 Thrust Disc £11.95 Thrust Disc £11.95 Karate Combat Disc £11.95 Karate Combat BBC/Electron £9.95 Citadel £9.95 Citadel Disc £11.95 Repton II £9.95 Repton II Disc £11.95 Galaforce £9.95 Galaforce Disc £11.95 TYNESOFT Future Shock BBC/Ele £7.95 Jet Set Willy BBC/Elec <td>MICRO POWER</td> <td></td>	MICRO POWER	
Micro Power Magic 40 Track MIRRORSOFT Strike Force Harrier Sp. 9.5 Strike Force Harrier Strike Force Harrier Sp. 9.5 Strike Force Diary of Adrian Mole Disc Strike Force Maker Sp. 9.5 Striker Stud Sp. 9.5 Strykers Run Sp. 9.5 Sp. 9.5 Strykers Run Sp. 9.5	Dr Who Mines and the Mines of Terror Master B+	CO OF
Strike Force Harrier	Micro Power Magic 40 Track	£7.95
Strike Force Harrier Disc	MIRRORSOFT Strike Force Hamiles	
Hi-Bouncer Sc. 95	Strike Force Harrier Disc	£9.95
The Secret Diary of Adrian Mole Disc SLIPPERY SLUG	Hi-Bouncer	£6.95
SLIPPERY SLUG	MOSAIC/LEVEL 9 The Secret Diany of Adrian Mala Diag	040.05
SUPERIOR Ravenskull S9.95 Ravenskull S9.95 Repton III S9.95 Strykers Run S11.95 Strykers Run S9.95 Strykers Run		112.95
Ravenskull Disc		£29.90
Ravenskull Disc Repton III 99.95		£0 05
Repton III Disc Strykers Run £9.95		£11.90
Strykers Run Stry		
Thrust Disc Thrust BBC/Electron Karate Combat Disc Karate Combat BBC/Electron Citadel Citadel Citadel Disc Repton II Repton II Repton II Disc Galaforce Galaforce Galaforce Disc TYNESOFT Future Shock BBC/Ele Gan BBC/Ele Im Botham Cricket BBC/Ele Jet Set Willy BBC/Elec Winter Olympics BBC/Elec US GOLD Impossible Mission Disc Impossible Mission Raid Over Moscow Rebel Planet Questprobe Bounty Bob Tapper Beachhead ULTIMATE Cosmic Battlezones VIPER Sim BBC/Electron EDUCATIONAL ASK—BBC/ELECTRON The Best Four Programs— Maths Cassette Maths Disc Language Cassette Language Cassette Language Cassette Language Disc HIGHLIGHT SOFTWARE Roading Pack 2 Reading Pack 2 Reading Pack 4 HILL MACGIBBON Picture Builder Where? World Geography Shield Maths 1'O' Level Revision Physics 'O' Level Examiner Sp. 95 Maths 1'O' Level Revision Maths 1'D' Level Revision Maths 1'D' Level Revision M	Strykers Run	£9.95
Thrust BBC/Electron		£11.95 £11.95
Karate Combat BBC/Electron £8.95 Citadel £9.95 Citadel Disc £11.95 Repton II Disc £11.95 Galaforce £9.95 Galaforce Disc £11.95 TYNESOFT Future Shock BBC/Ele £7.95 Goal BBC/Ele £7.95 Jet Set Willy BBC/Elec £7.95 Winter Olympics BBC/Elec £7.95 Jet Set Willy BBC/Elec £7.95 Impossible Mission Disc £14.95 Impossible Mission Disc £14.95 Impossible Mission £9.95 Belp Planet £9.95 Questprobe £7.95 Bounty Bob £9.95 Tapper £9.95 Beachhead £9.95 ULTIMATE Cosmic Battlezones £9.95 VIPER	Thrust BBC/Electron	£7.95
Citadel Disc £11.95 Repton II £9.95 Repton II Disc £11.95 Galaforce £9.95 Galaforce Disc £11.95 TYNESOFT Future Shock BBC/Ele £7.95 Iam Botham Cricket BBC/Ele £7.95 Jet Set Willy BBC/Elec £7.95 Winter Olympics BBC/Elec £7.95 US GOLD Impossible Mission Disc £14.95 Impossible Mission Disc £14.95 Impossible Mission Disc £9.95 Impossible Mission Disc £9.95 Questprobe £7.95 Questprobe £7.95 Bounty Bob £9.95 Tapper £9.95 Beachhead £9.95 ULTIMATE Cosmic Battlezones Cosmic Battlezones £9.95 VIPER Sim BBC/Electron Sim BBC/Electron £7.95 EDUCATIONAL ASK—BBC/ELECTRON The Best Four Programs— Maths Cassette £19.95 Maths Disc £19.95 Language Cassette <td>Karate Combat Disc Karate Combat BBC/Electron</td> <td></td>	Karate Combat Disc Karate Combat BBC/Electron	
Repton II	Citadel	£9.95
Galaforce £9.95 Galaforce Disc £11.95 TYNESOFT Future Shock BBC/Ele £7.95 Goal BBC/Ele £7.95 Jet Set Willy BBC/Elec £7.95 Winter Olympics BBC/Elec £6.95 Winter Olympics BBC/Elec £6.95 US GOLD Impossible Mission Disc £14.95 Impossible Mission Disc £14.95 Impossible Mission £9.95 Rebel Planet £9.95 Questprobe £7.95 Bounty Bob £9.95 Tapper £9.95 Beachhead £9.95 ULTIMATE Cosmic Battlezones £9.95 VIPER Sim BBC/Electron £7.95 EDUCATIONAL ASK—BBC/ELECTRON The Best Four Programs— Maths Cassette £19.95 Language Cassette £19.95 Language Disc £19.95 HIGHLIGHT SOFTWARE £4.49 Reading Pack 2 £7.95 Reading Pack 3 £7.95 Reading Pack 4	Repton II	£11.95 £9.95
Galaforce Disc	Repton II Disc	£11.95
TYNESOFT Future Shock BBC/Ele Goal BBC/Ele Goal BBC/Ele S7.95 Jem Botham Cricket BBC/Ele Jet Set Willy BBC/Elec Winter Olympics BBC/Elec Winter Olympics BBC/Elec US GOLD Impossible Mission Disc Impossible Mission Raid Over Moscow Rebel Planet Questprobe S7.95 Bounty Bob S9.95 Tapper Beachhead S9.95 ULTIMATE Cosmic Battlezones VIPER Sim BBC/Electron S7.95 EDUCATIONAL ASK—BBC/ELECTRON The Best Four Programs— Maths Cassette S19.95 Language Cassette Language Cassette Language Disc HIGHLIGHT SOFTWARE Roadcraft 1 Set 449 Bert Boot Reading Pack 2 Reading Pack 4 HILL MACGIBBON Picture Builder Where? World Geography SHIELD Maths 1 'O' Level Revision Maths 'O' Level Examiner S9.95 Maths 'O' Level Examiner S9.95 Maths 'O' Level Examiner		
Goal BBC/Ele	TYNESOFT	
ASK	Goal BBC/Ele	£7.95 £7.95
Winter Olympics BBC/Elec £6.95 US GOLD Impossible Mission Disc £14.95 Impossible Mission £9.95 Raid Over Moscow £9.95 Rebel Planet £9.95 Questprobe £7.95 Bounty Bob £9.95 Tapper £9.95 Beachhead £9.95 ULTIMATE Cosmic Battlezones £9.95 VIPER Sim BBC/Electron £7.95 EDUCATIONAL XXX BBC/ELECTRON The Best Four Programs— Maths Cassette £19.95 Maths Disc £19.95 Language Cassette £19.95 Language Cassette £19.95 Language Disc £19.95 HIGHLIGHT SOFTWARE Roadcraft 1 £4.49 Bert Boot £4.49 £4.49 Bert Boot £7.95 Reading Pack 2 £7.95 Reading Pack 3 £7.95 Reading Pack 4 £7.95 HILL MACGIBBON Picture Builder £9.95 MiCRO POWER Where? £6.95	lam Botham Cricket BBC/Ele	£7.95
US GOLD Impossible Mission Disc	Winter Olympics BBC/Elec	
Impossible Mission	US GOLD	
Raid Over Moscow £9.95 Rebel Planet £9.95 Questprobe £7.95 Bounty Bob £9.95 Tapper £9.95 Beachhead £9.95 ULTIMATE £9.95 Cosmic Battlezones £9.95 VIPER Sim BBC/Electron £7.95 EDUCATIONAL ** ASK—BBC/ELECTRON ** The Best Four Programs— ** Maths Cassette £19.95 Language Cassette £19.95 Language Disc £19.95 Language Disc £19.95 HIGHLIGHT SOFTWARE ** Roading Pack 2 £7.95 Reading Pack 3 £7.95 Reading Pack 4 £7.95 HILL MACGIBBON ** Picture Builder £9.95 Micro POWER ** Where? £6.95 World Geography £6.95 SHIELD ** Maths 1 'O' Level Revision £9.95 Maths 'O' Level Examiner	Impossible Mission	
Questprobe £7.95 Bounty Bob £9.95 Tapper £9.95 Beachhead £9.95 ULTIMATE £9.95 Cosmic Battlezones £9.95 VIPER \$19.95 Sim BBC/Electron £7.95 EDUCATIONAL \$19.95 ASK—BBC/ELECTRON \$19.95 Maths Cassette £19.95 Maths Disc £19.95 Language Cassette £19.95 Language Disc £19.95 HIGHLIGHT SOFTWARE \$4.49 Reading Pack 2 £7.95 Reading Pack 3 £7.95 Reading Pack 4 £7.95 HILL MACGIBBON \$9.95 Micro POWER Where? £6.95 World Geography £6.95 SHIELD Maths 1 'O' Level Revision £9.95 Maths 2 'O' Level Revision £9.95 Maths 'O' Level Examiner £9.95 Physics 'O' Level Examiner £9.95	Raid Over Moscow	£9.95
Tapper £9.95 Beachhead £9.95 ULTIMATE £9.95 Cosmic Battlezones £9.95 VIPER \$5.95 Sim BBC/Electron £7.95 EDUCATIONAL \$7.95 ASK—BBC/ELECTRON \$1.95 The Best Four Programs— Maths Cassette £19.95 Maths Disc £19.95 Language Cassette £19.95 Language Disc £19.95 HIGHLIGHT SOFTWARE \$19.95 Roadcraft 1 £4.49 Bert Boot £4.49 Reading Pack 2 £7.95 Reading Pack 3 £7.95 Reading Pack 4 £7.95 HILL MACGIBBON Picture Builder £9.95 Micro POWER \$6.95 Where? £6.95 World Geography £6.95 SHIELD Maths 1 'O' Level Revision £9.95 Maths 2 'O' Level Revision £9.95 Maths 1'O' Level Examiner £9.95 Physics 'O' Level Examiner £9.95	Questprobe	
Beachhead £9.95 ULTIMATE £9.95 Cosmic Battlezones £9.95 VIPER £7.95 EDUCATIONAL £7.95 ASK—BBC/ELECTRON \$19.95 Maths Cassette £19.95 Maths Disc £19.95 Language Cassette £19.95 Language Disc £19.95 HIGHLIGHT SOFTWARE \$4.49 Reading Pack 2 £7.95 Reading Pack 3 £7.95 Reading Pack 4 £7.95 HILL MACGIBBON £9.95 MICRO POWER Where? £6.95 World Geography £6.95 SHIELD Maths 1 'O' Level Revision £9.95 Maths 2 'O' Level Revision £9.95 Maths 1'O' Level Examiner £9.95 Physics 'O' Level Examiner £9.95	Bounty Bob	
Cosmic Battlezones £9.95 VIPER Sim BBC/Electron £7.95 EDUCATIONAL X ASK—BBC/ELECTRON The Best Four Programs— Maths Cassette £19.95 Maths Disc £19.95 Language Cassette £19.95 Language Disc £19.95 HIGHLIGHT SOFTWARE \$4.49 Roadcraft 1 £4.49 Bert Boot £4.49 Reading Pack 2 £7.95 Reading Pack 3 £7.95 Reading Pack 4 £7.95 HILL MACGIBBON £9.95 Micro Power \$6.95 Where? £6.95 World Geography £6.95 SHIELD Maths 1 'O' Level Revision £9.95 Maths 2 'O' Level Revision £9.95 Maths 1'O' Level Examiner £9.95 Physics 'O' Level Examiner £9.95		
VIPER \$7.95 Sim BBC/Electron £7.95 EDUCATIONAL \$19.95 ASK—BBC/ELECTRON \$19.95 The Best Four Programs— \$19.95 Maths Disc £19.95 Language Cassette £19.95 Language Disc £19.95 HIGHLIGHT SOFTWARE \$19.95 Roadcraft 1 £4.49 Bert Boot £4.49 Reading Pack 2 £7.95 Reading Pack 3 £7.95 Reading Pack 4 £7.95 HILL MACGIBBON \$9.95 Micro POWER \$6.95 Where? £6.95 World Geography £6.95 SHIELD \$9.95 Maths 1 'O' Level Revision £9.95 Maths 2 'O' Level Revision £9.95 Maths 1'O' Level Examiner £9.95 Physics 'O' Level Examiner £9.95		00.05
### ACGIBBON Picture Builder ### MACGIBBON ### ACGIBBON ### Picture Builder ### Where? ### World Geography ### South Action ### Act		19.95
ASK—BBC/ELECTRON The Best Four Programs— Maths Cassette £19.95 Maths Disc £19.95 Language Cassette £19.95 Language Disc £19.95 HIGHLIGHT SOFTWARE Roadcraft 1 £4.49 Bert Boot £4.49 Reading Pack 2 £7.95 Reading Pack 3 £7.95 Reading Pack 4 £7.95 HILL MACGIBBON Picture Builder £9.95 MICRO POWER Where? £6.95 World Geography £6.95 SHIELD Maths 1 'O' Level Revision £9.95 Maths 2 'O' Level Revision £9.95 Maths 'O' Level Examiner £9.95	Sim BBC/Electron	£7.95
The Best Four Programs— Maths Cassette £19.95 Maths Disc £19.95 Language Cassette £19.95 Language Disc £19.95 HIGHLIGHT SOFTWARE Roadcraft 1 £4.49 Bert Boot £4.49 Reading Pack 2 £7.95 Reading Pack 3 £7.95 Reading Pack 4 £7.95 HILL MACGIBBON Picture Builder £9.95 MICRO POWER Where? £6.95 World Geography £6.95 SHIELD Maths 1 'O' Level Revision £9.95 Maths 2 'O' Level Revision £9.95 Maths 'O' Level Revision £9.95 Maths 'O' Level Revision £9.95 Maths 'O' Level Examiner £9.95 Physics 'O' Level Examiner £9.95	EDUCATIONAL	
Maths Cassette £19.95 Maths Disc £19.95 Language Cassette £19.95 Language Disc £19.95 HIGHLIGHT SOFTWARE Roadcraft 1 £4.49 Bert Boot £4.49 Reading Pack 2 £7.95 Reading Pack 3 £7.95 Reading Pack 4 £7.95 HILL MACGIBBON £9.95 Micro Power £6.95 Where? £6.95 World Geography £6.95 SHIELD Maths 1 'O' Level Revision £9.95 Maths 2 'O' Level Revision £9.95 Maths 'O' Level Examiner £9.95 Physics 'O' Level Examiner £9.95		
Language Cassette £19.95 Language Disc £19.95 HIGHLIGHT SOFTWARE £4.49 Boadcraft 1 £4.49 Bert Boot £4.49 Reading Pack 2 £7.95 Reading Pack 3 £7.95 Reading Pack 4 £7.95 HILL MACGIBBON Picture Builder £9.95 MICRO POWER Where? £6.95 World Geography £6.95 SHIELD Maths 1 'O' Level Revision £9.95 Maths 2 'O' Level Revision £9.95 Maths 'O' Level Examiner £9.95 Physics 'O' Level Examiner £9.95	Maths Cassette	£19.95
Language Disc £19.95 HIGHLIGHT SOFTWARE Roadcraft 1 £4.49 Bert Boot £4.49 Reading Pack 2 £7.95 Reading Pack 3 £7.95 Reading Pack 4 £7.95 HILL MACGIBBON Picture Builder £9.95 MICRO POWER Where? £6.95 World Geography £6.95 SHIELD Maths 1 'O' Level Revision £9.95 Maths 2 'O' Level Revision £9.95 Maths 'O' Level Revision £9.95 Maths 'O' Level Examiner £9.95 Physics 'O' Level Examiner £9.95		
Roadcraft 1	Language Disc	
Bert Boot £4.49 Reading Pack 2 £7.95 Reading Pack 3 £7.95 Reading Pack 4 £7.95 HILL MACGIBBON £9.95 MICRO POWER \$6.95 World Geography £6.95 SHIELD \$9.95 Maths 1 'O' Level Revision £9.95 Maths 2 'O' Level Revision £9.95 Maths 'O' Level Examiner £9.95 Physics 'O' Level Examiner £9.95		04.40
Reading Pack 3 £7.95 Reading Pack 4 £7.95 HILL MACGIBBON £9.95 MICRO POWER \$6.95 Where? £6.95 World Geography £6.95 SHIELD \$9.95 Maths 1 'O' Level Revision £9.95 Maths 2 'O' Level Revision £9.95 Maths 'O' Level Examiner £9.95 Physics 'O' Level Examiner £9.95		
Reading Pack 4 £7.95 HILL MACGIBBON £9.95 Picture Builder £9.95 MICRO POWER \$6.95 Where? £6.95 World Geography £6.95 SHIELD \$9.95 Maths 1 'O' Level Revision £9.95 Maths 2 'O' Level Revision £9.95 Maths 'O' Level Examiner £9.95 Physics 'O' Level Examiner £9.95	Reading Pack 3	
Picture Builder £9.95 MICRO POWER £6.95 Where? £6.95 World Geography £6.95 SHIELD \$9.95 Maths 1 'O' Level Revision £9.95 Maths 2 'O' Level Revision £9.95 Maths 'O' Level Examiner £9.95 Physics 'O' Level Examiner £9.95	Reading Pack 4	
MICRO POWER Where? £6.95 World Geography £6.95 SHIELD \$9.95 Maths 1 'O' Level Revision £9.95 Maths 2 'O' Level Revision £9.95 Maths 'O' Level Examiner £9.95 Physics 'O' Level Examiner £9.95		CO OF
Where? £6.95 World Geography £6.95 SHIELD Maths 1 'O' Level Revision £9.95 Maths 2 'O' Level Revision £9.95 Maths 'O' Level Examiner £9.95 Physics 'O' Level Examiner £9.95		19.95
SHIELD Maths 1 'O' Level Revision £9.95 Maths 2 'O' Level Revision £9.95 Maths 'O' Level Examiner £9.95 Physics 'O' Level Examiner £9.95	Where?	
Maths 1 'O' Level Revision £9.95 Maths 2 'O' Level Revision £9.95 Maths 'O' Level Examiner £9.95 Physics 'O' Level Examiner £9.95		£6.95
Maths 'O' Level Examiner £9.95 Physics 'O' Level Examiner £9.95	Maths 1 'O' Level Revision	
Physics 'O' Level Examiner £9.95	Maths 2 'O' Level Revision Maths 'O' Level Examiner	
Chemistry O Level Examiner £9.95	Physics 'O' Level Examiner	£9.95
	Chemistry 'O' Level Examiner	£9.95

POSTAGE & PACKING ON SOFTWARE

All prices include VAT at 15%
For Software add £1 for outside Scotland, and 50p within Scotland, for orders over 6 games post & packing is FREE.



M & M COMPUTERS

Bon-Accord House 41 Albert Street, Aberdeen AB1 1XU

PHONE FOR SPECIAL PRICES 0224-571735

Tel: 0224-571735 Telex 739916



ROM Software

View ROM	.£59.80
Viewsheet	.£59.80
Wordwise Plus	
View Plot	.£29.95
View Spell ROM	
View 3.0 ROM	
AMX Mouse with Super Art ROM .	£79.95
AMX Pagemaker	£49.95
AMX 3D-Zicon	
AMX Database	
AMX XAM	
AMX Desk	
AMX Utilities	

Language ROMS

Forth ROM	£49.85
Forth Disc	£19.90
ISO Pascal ROM	£69.00
Logo ROM	
Micro Prolog ROM	

Computers

BBC Master 128k	£454.00
BBC Compact Colour system	
PAL TV Adaptor	
BBC Compact entry system	
Master 128k E.T. Terminal	£379.00
512k Upgrade with Mouse	
and Software	£228.00

Disc Software

Microtext	£59.80
Tree Of Knowledge	£11.50
Micros in Business	£69.00
Aviator	£17.65
Revs	£17.65
Master Elite	£19.95
View Index Disc	
Hi View Disc	
Printer Driver Generator Disc	

Printers

Epson LX86 NLQ Printer	.£270.00
Tractor Feed Unit	£17.00
Star NL10 with Parallel Interface	£260.00
BBC to Centronics Printer Cable	29.00

How to Order

Orders by post welcome: please mail coupon with

payment. Telephone orders welcome call 0224-571735. We also welcome Government and Educational

All products supplied include our own 12 months guarantee. Order with confidence. 7 days money back guarantee.
All charges include VAT. Carriage by courier £4.50 additional. Dealer enquiries and personal callers

welcome. The right is reserved to alter prices without prior All items subject to availability. E&OE.

CD 800

51/4" Double-sided 800K dual disk drive 40/80 track switchable with own Pwer supply



CS 400

51/4" Double-sided 400K single disk drive 40/80 track switchable with own Power supply



CSX 400

51/4" Double-sided 400K single disk drive 40/80 track switchable. Powers from the BBC computer

Disc Drives

Cumana disc Drives	
CSX100 40T single, no psu	99
CSX400 80T single, no psu	
CS100 40T single, with psu	
CS400 80T single, with psu	£165
CD200 80T dual, with psu	£247
CD800/S 40T/80T dual with psu	.£269
DFS Kit (unfitted)	£69.00
1770 ADFS Kit (unfitted)	
Cumana QFS Double Density Kit	£39.9

Monitors

Grumana 0

Microvitec 1	431	Standard£205.00
Microvitec 1	451	Medium£279.00
Microvitec 1	441	High£425.00
Zenith ZVM	Gre	en or Amber£89.95

Productivity Books

View Guide	25.00
Into View	25.00
View 3 Manual	210.00

SARCLAYCARD
VISA
Section 1

MAIL ORDER



To: M&M COMPUTERS, Bon-Accord House, 41 Albert Street Aberdeen AB1

Please send me_

- ☐ I enclose a cheque for £..... payable to M&M COMPUTERS.
- ☐ Please debit my Access/Visa Account

Signed_

Name

Address_

NEW BBC PRODUCTS FROM CLARES

FONTWISE PLUS £20.00



FONTWISE PLUS is now compatible with VIEW, MINI OFFICE II, EDWORD 2 and INTERWORD as well as WORDWISE and WORDWISE+!

Now you can have PROPORTIONAL and JUSTIFIED text in 12 different fonts, all within the same document if required. In addition to the standard facilities like line and page length, pagination, left margin etc. we have now added

- Enlarged, standard & condensed fonts
- Temporary indent
- User definable line feed
- User definable character spacing
- Non proportional fonts
- Now with 12 fonts
- Plus many more features

If you are not convinced ask us to send you a sample printout and you will be amazed at the quality - requires an EPSON compatible printer capable of single, double and quad density graphics but you do not require any RAM in your printer to use FONTWISE PLUS.

Enhanced BETA-BASE



- disc based, single or

- max 65,000 records

- up to 2048 characters

- up to 254 characters

- 5 search fields using

- 500 records on 3 fields

records per 100k

powerful options

in 60 seconds.

- approx 1200 ADDRESS

dual drives

and 200 fields

SPECIFICATION

- 1) Random Access
- 2) File Size
- 3) Record Size
- 4) Field Size 5) Holds
- 6) Search
- 7) Sort

SYSTEM FEATURES

- *CALCULATE using any valid expression
 *PRINTOUT Powerful options
- 'REDEFINE Titles, fields etc.
- *TRANSFER From one file to another
- GLOBAL ENTRY of repetitive data
 SEARCH LISTS Allow creation of sub Databases within main Database
- *SPOOLER enables you to create spooled files that are compatible with Wordwise, View etc.
- INPUT is a routine included on the disc which will allow you to write your own utilities for accessing your data. Many of the programs on the utilities disc were written using this procedure

BETA-BASE UTILITIES £12.00



Extend the power of Beta-Base with the extra facilities provided on this disc.


- *MAIL MERGE *LABEL PRINTER *DISC SORT
- **EXTENDED SEARCH**
- *FREE FORMAT TRANSFER
- *FAST PACK
- *STATUS

The MAIL MERGE alone is worth £12 so you get a real bargain with this disc. The features are so numerous that we cannot mention them all here.

Ask for our UTILITIES DATA SHEET if you want more information.

DISC 40 TRACK 80 TRACK 3 3" DISC - ADD £3 **EPROM**

Send for detailed newsletter All prices inclusive of VAT & Carriage -NO EXTRAS! Please state 40 or 80 track disc and state D.F.S. you use.



MACROM £40 £35 DISC



MACROM is a fast full featured MACRO ASSEMBLER ROM that allows the use of macros, which are loaded from a macro library stored on disc. Assembly can be from disc to memory, disc to disc, memory to memory or memory to disc, thus allowing the use of very long source code up to the length of your disc. MACROM source code is tokenized and thus takes up far less room in memory or on disc than most assemblers.

- Operate in any mode
- Tokenized source code
- Assembles 6502 & 65C02 codes
- Automatically loads macros from library on disc
- Automatically loads subroutines from disc
- Macro library supplied plus demo files
- Chain program sections into main code
- Many different assembly options
- Converts BBC assembler code into MACROM source code Very fast & very flexible

In a comparison with ADE, MACROM was able to assemble a program to disc in 1 min 24 secs compared to 5 minutes with ADE and the source code took up 30% less room on the disc.

Ask for a data sheet today

RAMROD £40 ROM





RAMROD is the ultimate in toolkit ROMs and is fully compatible with the whole BBC range from Model B through to the MASTER 128 and including both 6502 and TURBO co-processors. RAMROD adds 54 new commands to your computer. Areas covered are DISC (DFS & ADFS), GENERAL (memory commands etc.), ROM (including sideways RAM)

RAMROD provides commands to dump memory or a disassembly of memory to a printer. Editors can display the screen in 40 or 80 column mode.

Edit discs and search for ASCII or HEX sequences.

GENERAL

Edit, search, disassemble, compare, dump to printer and relocate ANY area of memory including the SHADOW screen. List vectors in use, load and save function keys even on MASTER etc.

In addition to the above you can move between ROM/RAM banks using (CTRL) Cursor Keys when in either memory or disassembly mode PLUS you can switch between memory editor and disassembler by pressing (CTRL)(TAB).

Includes commands for listing, loading, saving, wiping, swapping, ROM images. PLUS formatting and titling RAM banks for the ROM filing system and saving programs in RFS format.

Provides the same memory commands as GENERAL plus SHIFT and COMPARE memory across the TUBE both ways.

We cannot do justice to RAMROD in the space here so please ask us to send you a fuller data sheet -**RING NOW!**

NEW PRODUCTS

Watch out for a fabulous new product which will be released during SEPTEMBER for the MASTER and its compatibles.

This is a high quality art package called ARTROOM but it offers many features not provided elsewhere. It is a full screen package and is written by the authors of FLEET STREET EDITOR so you know that it will be good.

Ask for a data sheet NOW!



98 Middlewich Rd., Northwich, Cheshire CW9 7DA. Tel: 0606 48511 Open 9—5pm Monday—Friday LUNCH 12.30—1.30

* EPROMS * RAMS

QUALITY BBC chips from Hitachi, Fujitsu, Intel etc Low prices - Large stocks - Fastest delivery Prices INCLUDE VAT and UK post, normally by return

NB 21 volt Vpp EPROMs are generally no longer manufactured please telephone for availability and current price NOW is the time to order our VersEprom (see below)

250 nanoSecond - 12.5 volt Vpp (programming voltage)

27128A-25	1-2 pcs £3.20,	3-9 pcs £2.90,	10+ pcs £2.60
27256-25	1-2 pcs £5.25,	3-9 pcs £4.90,	10+ pcs £4.70
27C256-25	1-2 pcs £6.50,	3-9 pcs £6.25,	10+ pcs £6.00
	1-2 pcs £11.95,	3-9 pcs £11.75,	10+ pcs £11.50
	1-2 pcs £17.50,	3-9 pcs £17.25,	10+ pcs £17.00
	000	40 F an Od walk Van	Per Hermities

200ns - 12.5 or 21 volt Vpp

1-2 pcs £3.75, 3-9 pcs £3.50, 10+ pcs £3.30 2764 3-9 pcs £3.75, 10+ pcs £3.50 27128-20 1-2 pcs £3.95, 3-9 pcs £5.95, 10+ pcs £5.75 27256-20 1-2 pcs £6.50,

RAMS

Hit. 6264LP15 (ATPL, Watford) 1 pc £2.95, 2 + pcs £2.65 Upgrading Solidisk – please state type already fitted – NEC 41254-12 or 15, 41464-12 or 15. Equivalents £5.25 each inc. Socket

VersEprom

Low cost EPROM PROGRAMMER for BBC B, Plus and Master with DD and DFS. BBC coloured, sloping front case with ZIF. Plugs into/powered from user port. ROM Software includes fast programming algorithm. Programs 2764, 27128, 27256, 27512, 27513 and 27011, 12.5 or 21 volt EPROMs. Commands:-

TEST, READ, BLOW, VIEW and COMP. Price £49.95
EPROM ERASERS handling up to 3 EPROMs at a time D1 £21.45, D2 (with built-in 15 min timer) £26.45

Prices INCLUDE VAT and UK post, normally by return Send UK cheques/PO LA or Gov't Orders to:

SILICON CITY Mithian, St. Agnes, Cornwall TR5 0QE Access/Visa orders, telephone 087 255 2112

CYGNET ELECTRONICS

RAMWISE 16K RAM module For the BBC B & B+ micro

ONLY £21.50

Expand the ROM capability of your micro without the need to fit expensive ROM boards. RAMWISE is an easy to fit and easy to use 16K sideways RAM module.

No soldering required

* Small module plugs into any spare ROM socket
* Low power CMOS RAM chips used
* Already used in schools and colleges on ECONET
and E-NET systems
* Runs all existing ROMS

More than one module can be fitted

Write protect switch included
 Compatible with RAMWISE II board and can be used on ATPL board

RAMWISE II 32K RAM/ROM board for BBC B micro

ONLY £38.95

This board provides 2 EXTRA ROM sockets + 2 banks of 16K sideways RAM.

Battery backup for 32K RAM as standard

* Write protect switch controls both banks of RAM

No soldering required

* Direct load from disk to SWR using * LOAD (afsp)
* FREE utilities disc to load and save ROM software for RAMWISE & RAMWISE II. State 40 or 80 track disc.

Education Discounts available FREE P&P. Cheques, P.O. etc. to: CYGNET ELECTRONICS, PO Box 27, Bordon, Hants GU35 0HH. Tel. (04203) 5229

THE ULTIMATE POOLS PREDICTION PROGRAM

MASSIVE DATABASE Poolswinner is a sophisticated Pools prediction aid. It comes complete with the largest database available – 22000 matches over 10 years. The database updates

automatically as results come in.

PREDICTS Not just SCOREDRAWS, but AWAYS, HOMES and NO SCORES.

and NO SCORES.

SUCCESSFUL SELEC quarantee that Poolswinner performs significantly better than chance.

ADAPTABLE Probabilities are given on every fixture – choose as many selections as you need for your bet. The precise prediction formula can be set by the user – you can develop and test your own unique method.

SIMPLE DATA ENTRY All team names are in the program. Simply type in the reference numbers from the screen. Or use FIXCEN to produce fixture list automatically (see below).

DISC/MICRODRIVE COMPATIBLE Tapes supplied with conversion instructions.

PRINTER SUPPORT Full hard copy printout of data if you have a printer.

PRICE £15.00 (all inclusive)

FIXCEN 86/7 AT LAST: No more struggling for hours to get the fixture list into the computer. FIXGEN has been programmed with all English and Scottish fixture seconds. Fully compatible with Poolswinner. Yearly updates available.

POOLSWINNER with FIXGEN £16.50 (for both)

THE PUNTERS COMPUTER PROGRAM
You can develop and test your own unique winning system by adjusting the analysis formula, or use the program in simple mode. Coursewinner V3 uses statistical analysis of major factors including past form, speed ratings, course statistics, prize money, weight, going, trainer and jockey form etc, etc. It outputs most likely winners, good long odds bets, forecasts, tricasts etc. The database includes vital course statistics for all British courses. You can update the database – never goes out of date.

PRICE £15.00 (all inclusive) includes Flat BND New York (and the price of the pri

PRICE £15.00 (all inclusive) includes Flat AND National Hunt versions.

ALL PROGRAMS AVAILABLE FOR: AMSTRAD CPCs, AMSTRAD PCWs (ADD £3.00), All BBCs, All SPECTRUMS, COMMODORE 64/128, ATARI (48K+), SINCLAIR QL.

Supplied on tape (simple conversion to disc) – except PCW (on 3" disc) and QL (on microdrive)

Send Cheques/POs for return of post service to . . .



COURSEWINDIER

selec SOFTWARE



37 COUNCILLOR LANE, CHEADLE, CHESHIRE. 28 061-428 7425

VIDEO-TITLER II (BBC B and Master 128)

VIDEO-TITLER II is a sophisticated professional titling and caption-generator program with features that will impress both the pro and semi-pro video maker. Features include:

★ 7 Large fonts (including Old English)

* Proportional spacing & drop shadow

Text centering with optional under & overlining

Sub-titling in blue box background

Unlimited page saving and recall

Broadcast-style VTR starter clock (with personalised ident) showing programme duration, title & client

Use of all 16 colours in MODE 1 or 2

Program also ideal for slide making and A/V applications.

Supplied with full instructions, plus information on other aspects of BBC B and Master 128 titling and colour video interfacing.

VIDEO-TITLER II is £15.75. Disc only. Please state 40 or 80 track when ordering. Available from:

VISIONCRAFT SOFTWARE, PO BOX 135, LONDON N20 OHF

Bored With Games? Try

THE MAGIC EYE

Light Entertainment On The BBC (or Electron + Plus One) A window on the real world providing a simple introduction to the excitement of ROBOTICS and SENSORS for all ages. Ready to use Hardware, Software, and full Instructions for Fascinating Experiments including

Slot Car Timing, Remote Control, Goldfish Training and many more

Only 12.99 plus 50p. pp.

Orders with cheque or postal order stating BBC or Electron to:

SENTINEL ELECTRONICS 57 The Spinney, Anchorsholme. BLACKPOOL LANCS. FY5 3AS.

S. P. ELECTRONICS BBC MASTER 128 Z80 2nd processor (including manuels)		Special Specia
BBC MASTER 128	£499.0	12 C
Z80 2nd processor (including manuels)	£150.0	0 10
	J £339.0	0
CITIZEN 120D (inc. cable)	£199.0	0
Didd Operating System	£75.0	0
Disc Drives	from £85.00	1
G3 WHO RTTY PROGRAM (TAPE)	£7.50	
WE ARE G3 WHO RTTY PROGRAM (EPROM VERSION)	£20.00	
CONNON Det Marin 1999 All One. instructions)	£10.00	
CANNON Dot Matrix 160cps NLO	£299.00	
	from £17.95	
Di- D	£12.90	
specialists WORDWISE Word Processor	£33.00	
Slow Scan TV Circuit Board + Program (inc instructions)	£33.00	
ADFS ADFS	£17.50	
1770 DFS Kit	040.00	
OPUS 800k drives 40/80	£49.90	
MASTER COMPACT	£199	
ACORN ELECTRONS		
Wide selection or software, books, leads, plugs, etc.		
SAE for full list. All available Mail Order.		I prices only
		stocks last.
48 Linby Road, Huncknall, VISA	Educational &	
Notts. NG15 7TS	institutional	Carriage

168 33.34 h 154 8.10.12 100 150 IFC 150	VERTISEMENT Edinburgh Software Products Edinburgh Translations Edusoft Electronequip Elsevier Biosoft ESM EVENT 1,	137 152 168 161 140 142 168	Mighty Micro Mijas Software Minic Business Services Morley Electronics Nebulae Nevis Records Ltd	1307
33-34 h 154 8 10 12 100 150 IFC 150	Edinburgh Translations Edusoft Electronequip Elsevier Biosoft ESM Event 1	152 168 161 140 142 168	Mijas Software Minic Business Services Morley Electronics Nebulae	1
8 10 12 100 150 IFC 150	Edusoft Electronequip Elsevier Biosoft ESM Event 1	168 161 140 142 168	Minic Business Services Morley Electronics Nebulae	11
8 10 12 100 150 IFC 150	Electronequip Elsevier Biosoft ESM Event 1	161 140 142 168	Morley Electronics Nebulae	
100 150 IFC 150	Elsevier Biosoft ESM Event 1	140 142	Nebulae	
150 IFC 150	ESM Event 1	168		
1FC 150	Event 1			
150				1
		150	Oak Universal	
101	Fernleat	84	Opus Supplies Ltd	
	Flora Electronics	137 182	Pace	
159	FRC Electronics	56	Paean Systems	
	General information Systems LI	156	Paulfray Ltd	1
	Galmen		Peartree Computers	19
			Pineannie Software	13
	Gwent County Council		DW6	
	Home Based Business			
50	HCM Computers		Puriavello Traving Co	. 1
170	testifule of Oothological			1
150	institute of opinalmology		Hau Speech Technology	1
			R.S.D.	
			Hotherham Computer Cent	
	K M Software		Selec Software	1
			Sentinel Electronics	1
			Silicon City	1
	LCL	166	Soft Option	1
	Leewood Developments	137	Solidisk	172 1
	Linear Graphics	164	SP Electronics	1
	Longtron	82	Spairrelsoft	i
	LVP (Cnastal Tanes)			
				1
	Manue Floritonies		Storteett	
	Mancome			05 400 450 100 0
	Manne Court Supplier			95 103 158 IBC OF
108 112	Material Court Supplies		Studied Southate	
140	Manday Computers		System	13
42	meaduw computers			- 11
				58 6
				13
			Twilistar Computers	4
			Viglen Computer Supplies	28 3
		180	Vinderin	137 19
	Microman Computers	129	Vine Micros	
98	Micronay	84	Watford Electronics	68-7
25 27	Micropower	34	We-Serve	15
110	Mid-Sussex Music			18
	42 154 159 181 14 16 142 102 98 26 27	168 Calmes Galmes Ga	168 Gelmen 166	168

(all prices include VAT)

Tel: 0602 640377

Image Analysis Software for BBC Micro and Grafpad Digitiser Tablet

Converts the Grafpad into a sophisticated image anlaysis device (resolution 0.2mm) for measuring drawings or photographs, with the following menu selected functions: Multichannel point counter, linear distance measurement or width of a layer (scaled for magnification or reduction with choice of units) with disc storage of data. Digitise tracings and store multiple shapes on disc, correct display and print (Epson screen dump) shapes with zoom and area selection. Measure their perimeter, area, radius, volume, Feret (caliper) diameters and angles, centre of gravity, and 4 factors for shape classification. Edit numerical data files, and display and print them as histograms with automatic or manual scaling and statistics. Compatible with BBC B, B+, and Master DIGIT 40 or 80 Track Floppy Disc and Instruction Manual.

For GrafpadII (requires Grafpad utilities disc) and other Grafpads. New DISTIT software uses DIGIG shape files to analyze the distribution of shapes or particles and tests whether they are regularly or randomly arrayed by nearest neighbour analysis. **DISTIT** Disc and manual:

Institute of Opthalmology, Judd St., London, WC1H 9QS. 01-387 9621 ext 264

ROOM 7

SOCCER BOSS

extra

Football management simulation game

League fixtures, F.A. Cup and Littlewoods cup games, Substitutions, make your own decisions as manager.

ALSO BUILDERS SOFTWARE

The following packages are available. Central heating, Electric cable, Structural beam size calculations.

ALL ENQUIRIES WELCOME

Available on BBC 'B' and MASTER. Please state 40 or 80 track disc. All prices include V.A.T. at 15%

Letters/cheques to: W.L. Computer Services, First Floor, H.S.L. Buildings, 437 Warrington Road, Rainhill L35 4LL. VISA card orders – tel: 051 426 9660.

3" HITACHI DISK DRIVES

Suitable for use on the Amstrad 6128, 664, Tatung Einstein, BBC with DFS. 40 track, double density. 3 ms track access time. Unformatted single sided 250k; double sided 500k. Shuggart interface. capacity -Plug compatible with 51/4 inch drives

£29.95 + VAT Single sided £39.95 + VAT Cables available for connecti Amstrad — £7.50 plus VAT. Double sided BBC - £10.00 plus VAT Tatung — £10.00 plus VAT CARRIAGE £3 + V.A.T.

FOR FURTHER DETAILS SEND S.A.E. TO

MATMOS Ltd., Unit 11, Lindfield Enterprise Park, Lewes Road, LINDFIELD, West Sussex RH16 2LX Tel. 0444-73830 Or Computer Appreciation

111 Northgate, CANTERBURY, Kent. CT1 1BH.

REAL-TIME CONTROL FOR THE BBC MICRO

Watch the SPIDER!

Powerful new BASIC commands for invoking PROCs from the User Port, Serial Port or the Keyboard.

8 independent countdown timers.

Easy to install with no soldering. Comprehensive manual supplied.

New SPIDER 2 features

Special keywords for controlling the Serial Port.

Professional implementation of Foreground/Background

processing.

Reaction timing and pulse trains accurate to 0.1 milliseconds!

from £65 including VAT

SPIDER 2 is a RAM/ROM combination which uses none of the BBC's memory, so **BASIC** programs are unaffected.

The BBC B+ is fully supported and we supply a complete range of digital, analogue and serial interfaces for use with SPIDER

using the 1MHz bus. Ask now for details. Paul Fray Ltd

NOW AVAILABLE FOR BBC MASTER

out

SPIDER

Willowcroft, Histon Road, Cambridge CB4 3JD Telephone: (0223) 66529

PRICES PER BOX OF 10 DISKS ALL DISKS FULLY GUARANTEED DISCS 40 TRACK SS/DD 80 TRACK DS/DD

5.25" Diskettes STORAGE MASTER DS/DD 11.00 13.00 15.00 NASHUA (Lib. Cased) MAXELL UNBRANDED 12.00 15.00 16.00 18.50 21.00 16.00 6.00 8.00 9.00 9.00 BULK PACK (25 Discs) 14.00 17.00 18.00

3.5' Diskettes, Storage Master, Nashua, Sony (Box of 10)

Battery Back RAM Modules

16K-£25.00 32K-£35.00

MEMORIES

(BBC COMPATIBLE)

			U.S. A.
2764-25Ons	£2.50	4164-15	£1.00
27128-25Ons	£2.80	41256-15	£2.50
27256-25Ons	£5.00	41464-15	£5.00
27C256-25Ons	£6.50	41416-15	£2.50
		74 ALS 245	£2.50
		65C02Cmos	
27512-25Ons	£12.00		
6264LP-15	£2.75	CPU 2MHZ	9.00
8271 FDC	£37.50	CPU 4MHZ	£18.00
8271 + TTL & CMOS CHIPS	S (Exc. DF	SROM)	£42.50

LISTING PAPER

11' \times 9.5' Microperforated 60gsm 2000 sheet £11.50 (+£3 P.&P.)



FLORA ELECTRONICS

14 LEVER STREET, PICCADILLY, MANCHESTER M1 1LN TEL: 061-228 3553

ALLERS WELCOME Educational & Institutional orders welcome Prices include V.A.T. and P.& P.

FREE ADS

Electron owner seeks penpals from anywhere to exchange hints, tips, etc. Please write to: Darren Condon, 59 Castle Close, Clondalkin, Dublin 22, Ireland. Wanted a listing for RTTY for my Acorn Electron. Write to Jo Quaedvlieg, Past Rayenstraat 17, 6137 VT Sittard,

The Netherlands.

Penpal wanted to swap info. Must have disc-drive. Details: Paul Hinks, 8 Norwick Close, Ladybridge, Bolton, Lancs. Tel: (0204) 64714.

Penpal wanted with disc drive to swap ideas and programs, aged around 14. AMX Mouse wanted. Tel: (0384) 873507, Richard.

Penpal wanted for owner of BBC B disc drive. Age 12 to 13, S Robshaw, Courtlands, Exmouth, Devon, EX8 3NU. Printer Brother HR-5, serial type,

Hermer Brother FIR-5, serial type, thermal-transfer inc. paper and leads. London area. Buyer collects. Bargain £55 ono. Tel: 01-902 8351.

Pace Nightingale modem and Commstar + manual vgc - £60, ono. Tel: (0723) 584290.

Electron (boxed), First Byte joystick interface, Quickshot II, tape recorder and software (25+) – £120. Tel: Chamara, 01-453 0407.

BBC 40T single disc drive (Microware) – £50. Also System Delta ROM + mail shot application, manuals – £50. Tel: 01-368 1773. After 6pm.

Acorn Z80 second processor, complete with manuals and software, plus *Wordstar* and *DBase II*. Excellent condition – \$260 ono. Tel: (04022) 51253.

Microvitee 1441 hi-res colour monitor,

Microvitec 1441 hi-res colour monitor, cost £506 new. Sell for only £350. 01-866 1248 evenings. Ask for Paul.

Acorn Teletext adapter with Teletext ROM, \$90 ono. Also RAMwise II 32k RAM-ROM board with battery backup, \$20 ono. (0657) 3415 after 5pm. BBC B OS 1.2 Acorn DFS ATPL side-

BBC B OS 1.2 Acorn DFS ATPL sidewise ROM-board. Basic extensions, Wordwise, View, disc s/w, Clare's Beta-Base, Elite, Aviator – \$250. Tel: (Weybeilden) 57476.

bridge) 57476.

Acorn Z80 + original software, £225.

Bitstik, £250. 128k Solidisk + soft/
firmware, £50. Acorn speech upgrade,
£20. Torch modem + software, £80. All

BBC B 1985 1SS 7 with ADFS, DDFS, DNFS. 256 SWR upgrade. Perfect condition, also new FX85 printer offers. Tel: (05255) 2940.

Silver Reed Exp 400 daisywheel printer for sale, £250. With wordprocessor, leads, takes 16" wide paper, friction feed. Contact Imran Ali: (0274) 578258 after 4pm.

RAMAMP RAM ROM, and extra six ROM sockets, write protect switch, £30. Tel: (0565) 3189 evenings.

Tel: (0565) 3189 evenings.

Master manuals 1 and 2 ADT, ARA 2,
Stryker speech, 5.25in discs 20+, magazines, printer paper and more!, £85. Tel:
(0686) 25257 (Powys).

zines, printer paper and more!, £85. Tel: (0686) 25257 (Powys).

BBC B 0S1.2, 32k SWR, Acorn DF50.90, Wordwise, boxed complete with all manuals £295. Tel: 01-874 5457 after 6 pm.

Electron Master RAM board, Plus 3, sideways ROM RAM board with 64k battery back up printer A/D ports, 2nd processor, £275. Tel: (0304) 617935.

BBC B 1.20S Basic 2, mint condition,

BBC B 1.20S Basic 2, mint condition, Watford DDFS disc interface, new Mitsubishi dual 40/80T disc drive. All manuals inclusive, £500 ono. Tel: Maurice London 01-673 0881.

Acorn Z80 plus extra software, boxed,

£225. Interword unused, £35. Tel: Lawrence evenings 6-9pm, 01-455 1069.

6502 Acorn second processor in excellent condition complete with DNFS and manual, £100 ono. Tel: Justin 01-440 7053, evenings.

Lightpen for sale. RH lightpen. Won top marks in AU survey. Only asking \$25 unused. Phone now (0529) 60755. Disc drive, 40 track, single sided (100k) with formatting disc and cables, \$60 ono. Tel: 082-925 450 (Chester area).

6502 second processor, £100. Aries B32 RAM board, £60. ATPL sidewise ROM, £20. Tel: (0782) 392713 evenings.

BBC B, carrying case, data recorder, 650 tapes, many magazines. Cannot split, for collection only, £1450 ono. 01-200 6316 (evenings, weekends).

Disc drive for sale. 40/80 track double sided with power supply unit. Only £80. Phone 01-699 6199.

BBC B 0S 1.2 complete with data recorder, joysticks and software. 18 months old, excellent condition. Mrs Lavington 5 Vale Gdns, Pontypridd CF37 2HG. Tel: (0443) 409607.

Bargain! Electron, with software, worth \$200. Only \$65. Phone: Northampton (0604) 410721.

Acorn 6502 second processor, *Hi-Basic*, manual, boxed, excellent condition, £85. Phillips BM7522 Amber monitor, manual, boxed, vgc, £50. Tel: (04463) 5287. For sale Acorn Electron, 12 months old

with tape recorder, Plus 1 interface, free games, leads and guide books. All boxed, Only £85. Tel: 01-961 3865.

BBC B Acorn DFS, Solidisk 32k SWR, twin 40 track single sided disc drives, Philips b/w monitor, Plus software, £375. Tel: 01-555 7392.

Cumana single 40 track (PSU) handbook, little used, upgrade after 2 months of use \$75 ono. Phone: Maidstone (0622) 45856.

Voxbox speech synthesiser for Acorn Electron, £20. Tel: (0623) 24903 after

5pm. Ask for John.
BBC bits include Solidisk 128k RAM, including utilities, £40. *Ultracalc*, £20.
Tandy CGP115, £30. GXR, £15. Toolkit plus, £15. 01-960 8820.

BBC DNFS twin 80t Solidisk 64k, SWR Viglen case, joysticks, software, 8 ROMs, 30 discs, books, £350. Tel: 01-699 3858, evenings.

Acorn Z80 2nd processor, £200. All s/w included, still under guarantee. Wanted, ROM expansion board, mini or full.

Tel: (Bradford) 833219.

Acorn 6052 second processor with DNFS & *Hi-Basic*, £85. Hornchurch (04024) 76100.

Acorn Z80 second processor, package with original software and manuals, all good condition. Phone Mark on 01-647

3073 after 4.30pm.

BBC B Acorn DFS, *Speech*, Opus 5802 drive, Delta 14C joystick, 20+ discs, *Dr Who*, 20+ mags, inc. *AU*, *A*+*B*, + pokes etc, £500 ono. Tel: (0472) 827942.

Cumana disc drive for BBC computer. SS, SD, good condition, £50. 5 discs included. Phone 3979579 (evenings please).

Micropolis 5.25in disc drives, new tested, double sided, 40/80T, without PSU, £65 ono. Tel: Simon 061-861 8255 (eves) or 061-236 3311 x 2982 (days).

Could anybody sell me an auto answer auto dial for the Pace Nightingale? John Barbour 12, Toronto St, Currock, Carlisle, Cumbria CA2 4E9.

BBC B + 40 track double sided disc

BBC B + 40 track double sided disc drive, 0.90 DFS, *Disc Doctor*, joystick, discs, software, books. Ring: (0924) 252496, £300.

Electron Vulcan joystick interface with joystick and conversion tape. £15 ono. Tel: Danny on 01-804 9080.

Disc drives, twin 100k units with PSU and cable for BBC, £80, Tel: (06286)

Wanted disc drive any condition, Plus 3 DFS. Tel: Bury 2951, ask for Stephen, after six.

Plus 3 required for Electron, Sherwood. Tel: (0845) 25755 (North Yorkshire).

Philips monitor BM7522, amber model (under guarantee), £55. 128k Solidisk and necessary software, £40. Acorn 8k RAM board (unused), £8. Tel: Bradford (0274) 43748 after 6pm.

Wanted Atom expanded Duo I for example 12k, 64k or more and Atom Lisp tape. Write to Morgan, 21 Mt. Pleasant Drive, Bournemouth, Dorset, DH8 9JL. Electron, Plus 1, Plus 3, data recorder, View, ViewSheet, Logo discs tapes, \$250. Tel: Bodmin (0208) 5495.

Sharp MZ80K, built in monitor and cassette recorder. Software and manuals, \$100, ono. Tel: Enfield, 01-363 0039, (Granings or weakends)

(evenings or weekends).

BBC B including Solidisk SWR, case, double density DFS, dual 80T drives, demon modem, serious and games software, £499 ono. Tel: 01-660 8360.

BBC B Opus Challenger Replay ROM,

Acorn Recorder, top disc games, 3 Voltmace joysticks, books, all as new £750 ono. Chris Jones, Chez Nous, Bulkington, nr Devizes, Wiltshire.

Bulletin board system: BBC B, ROM/RAM expansion, 1.6m byte drives, modem, printer, mouse, PSU, + more! Mostly new – guaranteed! + heeps software. £870. Tel: (0709) 542622.

Acorn ROM and EPROM cartridge for BBC Master 128 micro computer. Brand new, unused, cost £14.95, will accept £9. Tel: 01-952 7244.

Tel: 01-952 7244.

BBC B, Opus Challenger 256k disc drive, Replay ROM, discs, joystick, magazines, much original software, books \$375. Tel: (0742) 444974.

BBC B OS 1.2 Shinwa CP80, ROM board, Oxford Pascal, Opus 40/80 disc drive +DOS, discs, joysticks, original invoices, many extras, £575. Tel: 01-310 0414.

Aries B32/B12 £90 Centronics text printer £40 Solidisk 32k/WD1770 £50. ViewStore £30 modem, Wordease, B-ROM, all manuals. Tel: Upminister 29912

BBC B with 80/40 disc drive and 6502 SP, monitor and software including Pascal, BCPL, £450. Tel: Lee, evenings, 01-435 3743.

Wanted! BBC disc-users to exchange ideas. Write to S Berry, 11 Galpins Rd, Thornton Heath, Surrey, CR4 6EL.

Thornton Heath, Surrey, CR4 6EL.

Opus Challenger Jk disc drive and ROM disc and replay ROM for tape to disc conversions. Offers please, will separate. Tel: (0455) 614066.

Cumana CSXL100 disc drive. As good as new, still boxed with cables and manual, £59 Tel: Colwyn Bay, (0492) 531225.

BBC Master 128, immaculate condition, plus software, £375. Tel: Stirling (0786) 63854. (Evenings and weekends).

Wanted BBC B OS 1.2 Geoff, Christchurch, Dorset. Tel: (0202) 486321 X 246 (office) or 485730 in the evenings after 6pm.

BBC B, double drives, replay, Speech chip, £400+ of software, joysticks, the lot must go, any offers welcome. Tel: (0539) 821562.

Wanted cheap NLQ printer also any teletext adapter for BBC B. Contact John on (0382) 68601 after 5pm.

Cumana d/drive 40 track, with PSU £65, Smith Corona, Fastext 80,80 column dot matrix printer, £85 ono. Ring (0622) 45856, evening only.

FREE PERSONAL AD SERVICE

Fill in the form below to a maximum of 20 words (one in each box) and send it to Acorn User Free Ads, 141-143 Drury Lane, London WC2B 5TF. Please use capital letters, write clearly, and remember your name, address and telephone number. Without this full information, supplied on a separate sheet of paper, we regret we cannot carry your Free Ad. We cannot accept entries selling or swapping software. This is a service to readers – no companies please. One entry per form only. Free Ads are carried in the magazine as space permits, and any Free Ads not used within a month of receipt will be disposed of.

Jay Landing 11	eng flyer a health?	A STORY OF THE STORY	
THE MEAN HAVE BUILDING			
The material	en leghinsah jirdi		e en della servicia della

ACORMUSER'S

DIARY

AU high and dry

Last month's Abuser has been read in high places. We can now report the following amazing results.

A Milne has been booted out of the BBC as a result of several embarrassing incidents. The two most widely quoted involve employing Jim Day and Dave Atherton:

Jim 'Kenco' Day, who flooded the BBC Enterprises building, has been 'promoted' to make a documentary on the Thames flood barrier.

Dave 'Tefal' Atherton, who has long harboured a desire to get into newspapers, has gone off to open a newsagents shop.

Rumours have been flying at the BBC and a 'spokesman' stated that when he leaves, they will be replacing Dave 'Tefal' with a Mr Russell Hobbs and Miss Anne Moulinex (who's affectionately known as 'Molyneaux' to Bruce Smith).

Despite leaving the BBC 'Tefal' is keeping his day job at Acorn User.

Pick up a Pickford

Acorn has at last got the deal through for Communicators with Pickfords. It took a long time to sign while lawyers on either side sorted out the bills from Acornsoft's move two years ago.

At the time Pickfords impounded Acornsoft's furniture until the money was paid.

Acorn is now hoping to persuade Pickfords to impound some more furniture (and also a few people).

Remission for Smith

Bruce 'I'm a fairy and my name's Nuff — Fairy Nuff' Smith, who for several years has cursed the pages of *Acorn User* as Technical Editor, has finally taken the hint and quit.

The ignoble scribe has gone on to greener pastures as the Editor of new magazine *Electronic Publishing Now!*

This led our Ed to reminisce



Smith in pre-Acorn User days

on the glorious days of 1982 when AU first appeared. Bruce's first submission was a review of a utility ROM for the Atom. The text was written on a typewriter (in Smith-spell it's a triperitter), and the listings were handwritten in biro!

Five years and 18 books later, he's at least got a printer

and 10 spelling checker programs (much needed). It was Bruce who introduced spelling mistakes into one and two-lettered words.

He has developed some terrible habits however, such as



Relaxing at the weekend

tearing his hair out as he tries to find typing mistakes in his listings (and all the guano in the world won't cure that).

So it's goodbye to him and welcome to Steve Mansfield

and Graham Bell, who've now got to do all the work Brucey never got around to.

Anyone who's got shares in Sam Smith's Brewery would be well advised to sell now as there ain't no Sam's pubs where old Brucey's going.



Afterfour years at Acorn User

Smith witticisms

How do monkeys toast their bread? They put it under the gorilla.

Why did the koala bear fall out of the tree? It was dead.

● Why are elephants big, grey and wrinkly? Because if they were small, white and round they'd be aspirins.

What would you call a man sitting on top of a pile of leaves? Russell.

Don't play with a BBC micro

Jack Scraggyhead of the Nincomputer Grauniad has done it once again.

Frequent Abusers will remember that 'twas his columns that said fractals couldn't be done from Basic because it didn't have recursion (a year after *Acorn User* said it could).

Now the BBC micro doesn't

exist as a games machine, at least as far as his awards for machine releases over the past year are concerned. Yet, what do we find if we read on? That the programmer of the year was no less than Geoff Crammond who cut his gaming teeth on the BBC micro several years ago with *Super Invaders* for

Acornsoft, and went on to write Aviator and Revs.

And guest which games he won the award for? No less than *Revs* and *Sentinel*. Guess which machines these games were written for? – the BBC.

We leave it to you to guess who gets the Abuser Woodentop award for this year.



Concept in Compilatio

The Superior Collection Volume 1 features one brand new game, Syncron, together with 7 of Superior Software's classic hits for the BBC Micro.

Syncron is a fast-action game set against a backdrop of an enormous graphically-detailed scrolling landscape. The landscape is, in total, 1024 times the size of the screen. You must endeavour to complete 16 hair-raising missions; in each mission you have to collect a number of power cylinders, land your spacecraft on a runway with each cylinder in turn, and finally locate and bomb the HQ Building. Whilst skilfully manoeuvring your spacecraft between the defence pylons and force-fields, you are attacked by alien spacecraft and missiles launched from the land bases. A superb game, worth at least £7.95 in its own right.

BBC Micro dual cassette	£9.95
BBC Micro 51/4" disc	£11.95
BBC Master Compact 31/2" disc	£14.95

Here's what the computer press said about some of the other titles on this compilation package:-

REPTON: "This is an astounding game reaching new heights in BBC arcade adventures" \dots MICRO USER

KARATE COMBAT: "Superior's Karate Combat is a superb karate simulation.

Graphics 9 Sound 9 Value 8 Playability 10."

... COMPUTER & VIDEO GAMES



AIRLIFT: "Airlift is an excellent arcade game . . . It has a very polished presentation that cannot fail to impress and has the element of addictiveness which keeps you going back for one more try." .. A & B COMPUTING

SMASH AND GRAB: "As usual with Superior products the graphics are excellent, with a good use of colour and no flicker. I expect this game will have you rolling with laughter. I certainly did.

Instructions 95% Playability 95% Graphics 100% Value For Money 100% ... HOME COMPUTING WEEKLY

Awarded (Top Rating)"

All games are compatible with the BBC B, B+ and Master series computers.



Please make all cheques payable to "Superior Software Ltd"






24 HOUR TELEPHONE ANSWERING SERVICE FOR ORDERS

OUR GUARANTEE

All mail orders are despatched within 24 hours by first-class post. Postage and packing is free. Faulty cassettes and discs will be replaced immediately.

Dept. SCC4, Regent House, Skinner Lane, Leeds LS7 1AX. Telephone: 0532 459453.

The Superior Collection Volume 2






REPTON 2







MISSILE STRIKE



BATTLE TANK



CRAZY PAINTER



OVERDRIVE

ANew Consept in Compilations

The Superior Collection Volume 2 features one brand new game, Kix, together with 7 of Superior Software's smash hits for the BBC Micro.

Kix is a fascinating strategic game in which you play the role of the intrepid Kix, whose objective is to take control of each of 20 quadrants; you must cover at least 75% of a quadrant's area in order to seize power over the entire quadrant. You can choose to move quickly or, to earn extra points, take a slower pace — but be ready to speed up immediately if you get cornered. The quadrants are guarded by Tracers who are aided and abetted by the fast-moving Fuse. Two excellent soundtracks add to the atmosphere of this fantastic game, which is worth at least £7.95 in its own right.

BBC Micro dual cassette	£9.95
BBC Micro 51/4" disc	
BBC Master Compact 31/2" disc	£14.95

Here's what the computer press said about some of the other titles on this compilation package:-

REPTON 2: "Repton 2 is better than anything I've played on the BBC Micro or Electron. Brilliant!" . . . ACORN USER

DEATHSTAR: "Deathstar is a super fast, all action arcade classic. It's the sort of game that you can't put down... The graphics are excellent and the scrolling is very smooth in all four directions The pace is fast and furious even on the starting screen. This action packed game is recommended for all arcade gamers."
... ELECTRON USER

SPACE PILOT: "The professional presentation — well up to the usual Superior standard — coupled with the incredible addictiveness

makes Space Pilot a must for all shoot'em-up fans.
Instructions 65% 65% Playability Awarded Graphics (Top Rating)" Value for Money 65% ... HOME COMPUTING WEEKLY

CRAZY PAINTER: "Great sound and graphics, smooth and accurate animation, responsive and simple controls.
Instructions 70%

Playability 100% Awarded 100% Graphics (Top Rating)" Value For Money 100% ... HOME COMPUTING WEEKLY

All games are compatible with the BBC B, B+ and Master series computers.



Please make all cheques payable to "Superior Software Ltd".





24 HOUR TELEPHONE ANSWERING SERVICE FOR ORDERS

OUR GUARANTEE

- All mail orders are despatched within 24 hours by first-class post. Postage and packing is free.
- Faulty cassettes and discs will be replaced immediately.